

CUBIX II

Outer Acrylic Interior Surface Mount





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.
Lower Output: Lamping code ending with LO features lower lumen output.
LED Dimming: Standard 1% 0-10V dimming.
Driver: Max remote driver installation distance:
White LED 25ft from fixture body and RGB 45ft from fixture body.
RGB: DMX controller supplied by others.
Finish: Highly durable oven cured no VOC premium powder coat.
Mounting Plate: Matches fixture finish.
Surge Protection: External surge protector provided as standard.

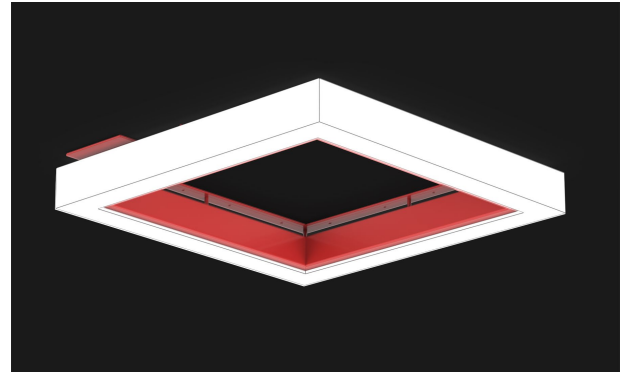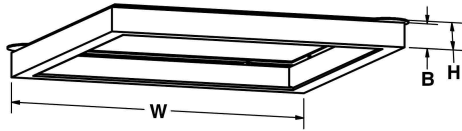

SAMPLE CATALOG NUMBER:		J-	BLK-	A
GL-3772-				
MODEL NO.		LAMPING	FINISH	OPTIONS
GL-3770	W in 24"x24" 10lbs B in 3" 4.5kg H in 3.5"	A. 24LED30 B. 24LED35 C. 24LED40 D. RGB	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3771	W in 36"x36" 15lbs B in 3" 6.8kg H in 3.5"	E. 36LED30 F. 36LED35 G. 36LED40 H. RGB		
GL-3772	W in 48"x48" 15lbs B in 3" 6.8kg H in 3.5"	I. 48LED30 J. 48LED35 K. 48LED40 L. RGB		
GL-3773	W in 60"x60" 19lbs B in 3" 10kg H in 3.5"	M. 60LED30 N. 60LED35 O. 60LED40 P. RGB	Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze Premium: SA-Satin Aluminum*	

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
24LED30/35/40	78	+85	50000	6802	3000/3500/4000	24LED30/35/40LO	43	+85	50000	3605*	3000/3500/4000
36LED30/35/40	112	+85	50000	10203	3000/3500/4000	36LED30/35/40LO	56	+85	50000	5102*	3000/3500/4000
48LED30/35/40	157	+85	50000	14682	3000/3500/4000	48LED30/35/40LO	85	+85	50000	7210*	3000/3500/4000
60LED30/35/40	193	+85	50000	18006	3000/3500/4000	60LED30/35/40LO	112	+85	50000	9523*	3000/3500/4000
RGB	Contact Factory for Details										

*Pending IES Testing

Universal Voltage unless otherwise specified.