

CYLINDER

Outdoor ADA Wall Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency high-power LED. Lumen maintenance +90% over 50,000 hour life. Light source is field replaceable.



Driver: Standard 1% 0-10V dimming. Max remote driver installation distance: 25ft from fixture body. Universal voltage 120-277V.

Body: Cast aluminum.

Mounting: -Driver mounted in 4" square by 2 1/8" deep junction box:
Steel City #52171 or equivalent (supplied by others)

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.

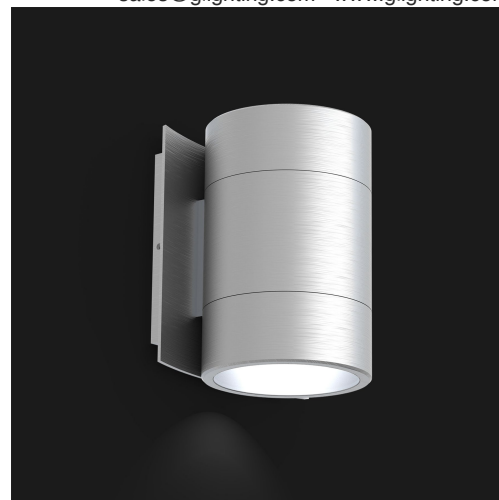

SAMPLE CATALOG NUMBER:

GL-6540-

B-

R2

R2

TBL-

A

MODEL NO.	LAMPING	REFLECTOR UP	REFLECTOR DOWN	FINISH	OPTIONS
GL-6540 W 5" in H 9 1/4" in E 4" in	C. LED30 B. LED35 E. LED40	Up R2 20° Fresnel Lens R3 30° Flat, Clear Lens	Down R2 20° Fresnel Lens R3 30° Flat, Clear Lens	Textured: TLV - Light Verdigris TWH - White TBL - Black TS - Silver TBN - Terra Brown TBZ - Bronze Premium: SA - Satin Aluminum	A. No Options EL. Emergency Ballast Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F.
GL-6541 W 5" in H 6" in E 4" in	C. LED30 B. LED35 E. LED40	Up R5 50° Flat, Clear Lens CC Closed Cap	Down R5 50° Flat, Clear Lens CC Closed Cap		
GL-6542 W 5" in H 7 5/8" in E 4" in	C. LED30 B. LED35 E. LED40	Up R2 20° Fresnel Lens R3 30° Flat, Clear Lens	Down R5 50° Flat, Clear Lens CC Closed Cap		
GL-6543 W 5" in H 7 5/8" in E 4" in	C. LED30 B. LED35 E. LED40	Up R5 50° Flat, Clear Lens CC Closed Cap	Down R2 20° Fresnel Lens R3 30° Flat, Clear Lens		

* All dimensions are nominal.

Light Source Definition

				— Specifications per side —		
Code	Kelvin	Reflector	CRI	Total Wattage	Rated Life Hrs	Delivered Lumens
LED30	3000K	20°	+80	14W	50000	1462*
		30°	+80	14W	50000	1030
		50°	+80	14W	50000	1284
LED35	3500K	20°	+80	14W	50000	1462*
		30°	+80	14W	50000	1030
		50°	+80	14W	50000	1284
LED40	4000K	20°	+80	14W	50000	1462*
		30°	+80	14W	50000	1030
		50°	+80	14W	50000	1284

Fixture is ETL listed for wet locations
Complete LM-79 data available at glighting.com