

DEMI

Interior Pendant

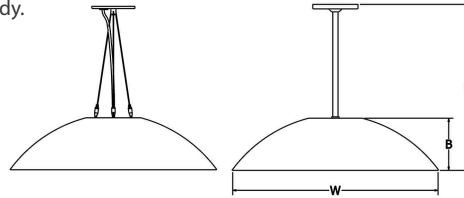






9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.
Uplight: Optional uplight is wired on a second circuit. Standard satin white top lens.
LED Dimming: Standard 1% 0-10V dimming.
Cable Hanger Option: Standard 150" cable and white cord for on-site adjustability.
Canopy: Matches outer fixture finish. Hanger 3 & 4 with A-O lamping option includes 9.125" dia by 2.625" H spinning. V, W, X lamping includes 12.5" dia by 2" H.
Driver: Max remote driver installation distance 25ft from fixture body.
Acrylic: Acrylic is UL-94 HB Flame Class rated.
Finish: Highly durable oven cured no VOC premium powder coat.
Inner Finish: Available in white, black, and gold liquid paint.
Non-white inner finishes will reduce lumen output.
Surge Protection: External surge protector provided standard.



SAMPLE CATALOG NUMBER:																
GL-2360-			E-	K-	BLK-	MO-	1-	A	038							
MODEL NO.			LAMPING		UPLIGHT		OUTER FINISH		INNER FINISH		HANGER		OPTIONS		OVERALL HEIGHT	
GL-2360			A. 1LED30		NA.NONE		Standard:		Standard:		1. Stem Mount Remote Driver		A. No Options		Specify overall height in inches for hanger styles 1 & 3.	
10lbs W 24" in			B. 1LED35		J. 1UPLD30		Powder Coat		MO-Matches Outer Finish				BC. Black Cord			
4.5kg B 6" in			C. 1LED40		K. 1UPLD35		BLK-Black		Liquid Paint		Fixture supplied with black power cord.					
H 38" in			D. 1LED30		L. 1UPLD40		BL-Blue		WH-White		DM. DMX Dimming					
			E. 1LED35				GR-Gray		BLK-Black		EL. Emergency LED					
			F. 1LED40		M. 1UPLD30		LG-Light Gray		GL-Gold		Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. Downlight only.					
			G. 1LED30		N. 1UPLD35		BE-Beige									
			H. 1LED35		O. 1UPLD40		PAB-Antique Brass									
			I. 1LED40				PA-Painted Aluminum									
			V. 1LED30*				PTC-Painted Copper									
GL-2361			W. 1LED35*				WH-White				2. Cable Mount Remote Driver					
10lbs W 30" in			X. 1LED40*				DBZ-Dark Bronze									
4.5kg B 7 7/16" in							NSN-New Satin Nickel				Drivers mounted remotely					
H 40" in							BRN-Brown									
							RD-Red									
							CH-Champagne									
							RG-Reed Green									
							SG-Sungold									
							GM-Gun Metal									
							POR-Oil Rubbed Bronze									
							PG-Pine Green									
							DO-Deep Orange									
							PV-Purple Violet									
							NB-Navy Blue									
GL-2362							Textured Powder				3. Stem Mount Oversized Canopy					
15lbs W 48" in							TLV-Light Verdigris									
7kg B 12" in							TWH-Textured White				Drivers mounted inside oversized canopy					
H 44" in							TBL-Textured Black									
							TS-Textured Silver									
							TBN-Terra Brown									
							TBZ-Textured Bronze									
							Premium:				4. Cable Mount Oversized Canopy					
							SA-Satin Aluminum									
											Drivers mounted inside oversized canopy					

All Dimensions are nominal.

Light Source Definition

Downlight Output						Uplight Output					
Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI	Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
A	1LED30	15W	1695	3000	80	J	1UPLD30	8W	866	3000	80
B	1LED35	15W	1695	3500	80	K	1UPLD35	8W	866	3500	80
C	1LED40	15W	1695	4000	80	L	1UPLD40	8W	866	4000	80
D	1LED30	26W	2906	3000	80	M	1UPLD30	12W	1213	3000	80
E	1LED35	26W	2906	3500	80	N	1UPLD35	12W	1213	3500	80
F	1LED40	26W	2906	4000	80	O	1UPLD40	12W	1213	4000	80
G	1LED30	39W	4359	3000	80	Universal Voltage unless otherwise specified.					
H	1LED35	39W	4359	3500	80						
I	1LED40	39W	4359	4000	80						
V	1LED30	68W	6617*	3000	80						
W	1LED35	68W	6617*	3500	80						
X	1LED40	68W	6617*	4000	80						

*Projected

Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.