
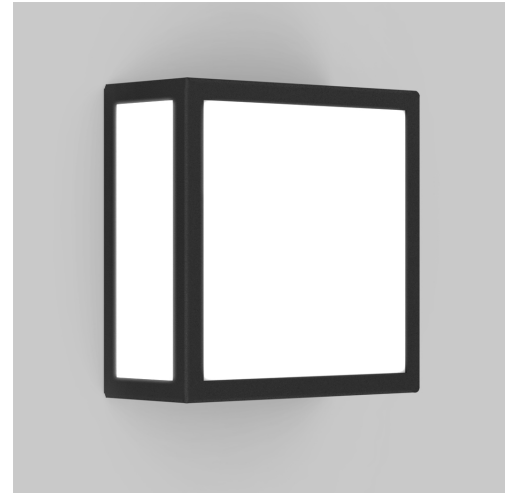


### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** 1% 0-10V / 1-10V dimming to 1% standard.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Custom:** Contact factory for custom lamping.
- Driver:** Driver mounted in 4" square by 2 1/8" deep junction box:  
Steel City #52171 or equivalent (supplied by others)
- Surge Protection:** External surge protector provided as standard.

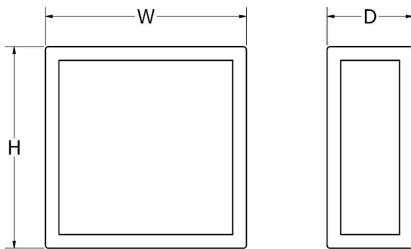

| SAMPLE CATALOG NUMBER:   |  |   |  |  |
|--|--|---|--|--|
| GL-6520-   | H5-  | S-  | NSN-   | A  |
| MODEL NO.  | LAMPING  | ACRYLIC   | FINISH   | OPTION(S)  |
| <b>GL-6520</b> W in 7" mm 180<br>H in 7" mm 180<br>4lbs D in 3 1/2" mm 90<br>2kg | <b>H0.</b> LED30<br><b>H5.</b> LED35<br><b>H4.</b> LED40 | Standard:<br><b>W.</b> White Opal<br>Optional:<br><b>S.</b> Satin White<br><b>F.</b> Faux Alabaster<br><b>M.</b> Earth Marble<br><br>Acrylic is UL-94 HB Flame class rated. | Standard:<br>Powder Coat<br><b>BLK-</b> Black<br><b>BL-</b> Blue<br><b>GR-</b> Gray<br><b>LG-</b> Light Gray<br><b>BE-</b> Beige<br><b>PAB-</b> Antique Brass<br><b>PA-</b> Painted Aluminum<br><b>PTC-</b> Painted Copper<br><b>WH-</b> White<br><b>DBZ-</b> Dark Bronze<br><b>NSN-</b> New Satin Nickel<br><b>BRN-</b> Brown<br><b>RD-</b> Red<br><b>CH-</b> Champagne<br><b>RG-</b> Reed Green<br><b>SG-</b> Sungold<br><b>GM-</b> Gun Metal<br><b>POR-</b> Oil Rubbed Bronze<br><br>Textured Powder<br><b>TLV-</b> Light Verdigris<br><b>TWH-</b> Textured White<br><b>TBL-</b> Textured Black<br><b>TS-</b> Textured Silver<br><b>TBN-</b> Terra Brown<br><b>TBZ-</b> Textured Bronze | <b>A.</b> No Options<br><b>B.</b> Top White Perf<br><b>C.</b> Bottom White Perf<br><b>EL.</b> Emergency LED<br>Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. |

All dimensions are nominal.

### Light Source Definition

| Code  | Total Wattage | CRI | Rated Life Hrs | Board Lumens | Kelvin |
|-------|---------------|-----|----------------|--------------|--------|
| LED30 | 6W            | +80 | 50000          | 950          | 3000   |
| LED35 | 6W            | +80 | 50000          | 950          | 3500   |
| LED40 | 6W            | +80 | 50000          | 950          | 4000   |

Universal Voltage unless otherwise specified.