

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.



Acrylic: Satin white acrylic is UL-94 HB Flame Class rated.


Cable Hanger: Comes with 72" cable and white cord for on-site adjustability.

Finish: Painted textured white.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.

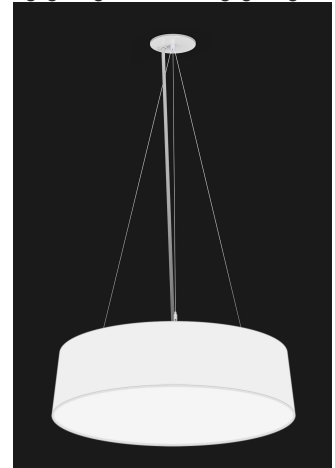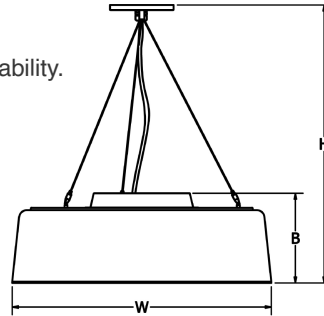

SAMPLE CATALOG NUMBER: GL-2635-		A-	1-	A
MODEL NO.		LAMPING	HANGER	OPTIONS
GL-2635	W 26" in 660 mm 10lbs B 8" in 205 mm 4.5kg H 20"-68" in 510-1730 mm Fixture Painted White	A. 5LED30 B. 5LED35 C. 5LED40	1. Cable 	A. No Options LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord. EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32"-131°F. Specify 120 or 277 voltage.
GL-2636	W 37 1/2" in 950 mm 15lbs B 8" in 205 mm 6.8kg H 20"-68" in 510-1730 mm Fixture Painted White	D. 8LED30 E. 8LED35 F. 8LED40		

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
5LED30	71	7047	3000
5LED35	71	7047	3500
5LED40	71	7047	4000
8LED30	113	11802	3000
8LED35	113	11802	3500
8LED40	113	11802	4000

Universal Voltage unless otherwise specified.