

# EOS WARM DIM

## Closed Acrylic Interior Pendant



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**Warm Dim:** LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 1% 0-10V dimming.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.



**Acrylic:** Satin white acrylic is UL-94 HB Flame Class rated.


**Cable Hanger:** Comes with 72" cable and white cord for on-site adjustability.

**Canopy:** Painted textured white.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.

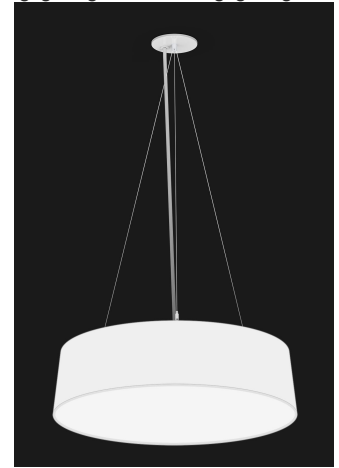

SAMPLE CATALOG NUMBER: GL-2635-				WD5-	1-	A
MODEL NO.				LAMPING	HANGER	OPTIONS
<b>GL-2635</b>	W in 26"	mm 660		<b>WD5</b>	<b>1. Cable</b> 	<b>A. No Options</b> <b>LC. 150" Cord &amp; Cable</b> Supplied with 150" Cord & Cable. <b>EL. Emergency Ballast</b> Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
	10lbs B in 8"	mm 205				
	4.5kg H in 20"-68"	mm 510-1730				
Fixture Painted White						
<b>GL-2636</b>	W in 37 1/2"	mm 950		<b>WD8</b>		
	15lbs B in 8"	mm 205				
	6.8kg H in 20"-68"	mm 510-1730				
Fixture Painted White						

All Dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
WD5	107	7047	3500-1800
WD8	170	11802	3500-1800

Universal Voltage unless otherwise specified.