

EOS TUNABLE WHITE

Closed Acrylic Interior Surface Mount



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K.


LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Dimming: Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.

Acrylic: Satin white acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.

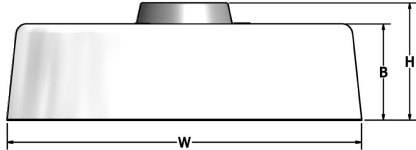

SAMPLE CATALOG NUMBER: GL-3635-					TW5-	A-
MODEL NO.					LAMPING	OPTIONS
GL-3635	W in	26"	mm	660	TW5	A. No Options EL. Emergency Ballast Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
8lbs	B in	8"	mm	205		
3.5kg	H in	8 3/8"	mm	215		
Fixture Painted White						
GL-3636	W in	37 1/2"	mm	950	TW8	
10lbs	B in	8"	mm	205		
4.5kg	H in	8 3/8"	mm	215		
Fixture Painted White						

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
TW5	71	7047	2700-6500
TW8	113	11802	2700-6500

Universal Voltage unless otherwise specified.