

FRONTIER II RGB+W

Interior Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

GENERAL SPECIFICATION

RGB+White: LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

RGB: LED option features RGB color changing light source. RGB channel wired DMX ready.

DMX: Controls by others.

Static Color: LED options (Red, Green, or Blue) feature static color.


Acrylic: One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.



Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.

Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.

Finish: Highly durable oven cured no VOC premium powder coat.

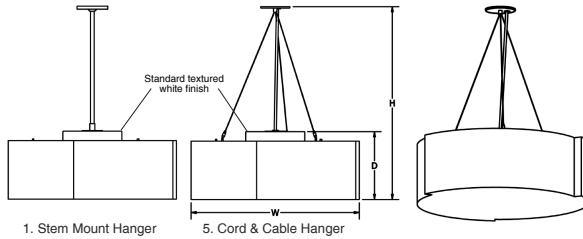


Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:							
GL-2507-		D-	S-	NSN-	1-	A-	020
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT	
GL-2507 W in 24" mm 610 18lbs B in 9 3/4" mm 250 7kg H in 20" mm 510	R. RED G. GREEN B. BLUE A. RGB* C. RGB30* D. RGB35* E. RGB40*	Standard: S Satin White Optional: WL White Linen JT Jute Linen Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze	1. Stem  2. Cord & Cable  Supplied with white cord with hanger.	A. No Options BC. Black Cord Fixture supplied with black power cord. Hanger option 5 only. LC. 150" Cord & Cable Supplied with 150" Cord & Cable. Hanger option 2 only. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.	
GL-2508 W in 30" mm 760 20lbs B in 11 3/4" mm 300 7.9kg H in 22" mm 560							

All Dimensions are nominal.
*DMX controls supplied by others.

Acrylic Lens

 Satin White	 White Linen	 Jute Linen
---	---	--

Standard satin white top and bottom diffuser with all acrylic options.

Light Source Definition

Fixture	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens
GL-2507	72W	+80	50000	7047
GL-2508	72W	+80	50000	7047

Universal Voltage unless otherwise specified.