

FRONTIER II TUNABLE WHITE

Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Dimming: Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.


Acrylic: One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.



Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.

Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.

Finish: Highly durable oven cured no VOC premium powder coat.

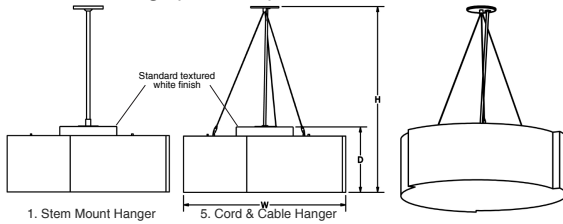


Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:							
GL-2507-		TW5-	S-	NSN-	1-	A-	020
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT	
GL-2507 W in 24" mm 610 18lbs B in 9 3/4" mm 250 7kg H in 20" mm 510	TW5	Standard: S Satin White Optional: WL White Linen JT Jute Linen	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze	1. Stem  2. Cord & Cable  Supplied with white cord with hanger.	A. No Options BC. Black Cord Fixture supplied with black power cord. Hanger option 5 only. LC. 150" Cord & Cable Supplied with 150" Cord & Cable. Hanger option 2 only. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.	
GL-2508 W in 30" mm 760 20lbs B in 11 3/4" mm 300 7.9kg H in 22" mm 560		Acrylic is UL-94 HB Flame Class rated.					

All Dimensions are nominal.

Acrylic Lens

 Satin White	 White Linen	 Jute Linen
---	---	--

Standard satin white top and bottom diffuser with all acrylic options.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
TW5	71	7047	2700-6500

Universal Voltage unless otherwise specified.