

# FRONTIER II WARM DIM

## Interior Pendant



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

**Warm Dim:** LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 1% 0-10V dimming.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.


**Acrylic:** One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.



**Canopy:** Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.

**Cable Hanger Option:** Supplied with standard 72" white cord and cable. Field adjustable.

**Finish:** Highly durable oven cured no VOC premium powder coat.

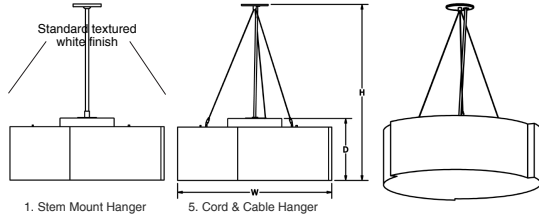
**Surge Protection:** External surge protector provided as standard.




SAMPLE CATALOG NUMBER:						
GL-2507-	WD5-	S-	NSN-	1-	A-	020
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
<b>GL-2507</b> W in 24" mm 610 18lbs B in 9 3/4" mm 250 7kg H in 20" mm 510	<b>WD5</b>	Standard: <b>S</b> Satin White  Optional: <b>WL</b> White Linen <b>JT</b> Jute Linen	Standard: Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBN</b> -Terra Brown <b>TBZ</b> -Textured Bronze	<b>1. Stem</b> 	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. Hanger option 5 only. <b>LC. 150" Cord &amp; Cable</b> Supplied with 150" Cord & Cable. Hanger option 2 only. <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	Stem mount only - Specify overall height in inches.  Standard overall height shown by model no.
<b>GL-2508</b> W in 30" mm 760 20lbs B in 11 3/4" mm 300 7.9kg H in 22" mm 560		Acrylic is UL-94 HB Flame Class rated.		<b>2. Cord &amp; Cable</b>  Supplied with white cord with hanger.		

All Dimensions are nominal.


### Acrylic Lens



Satin White



White Linen



Jute Linen

Standard satin white top and bottom diffuser with all acrylic options.

### Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
WD5	107	7047	3500-1800

Universal Voltage unless otherwise specified.