

FRONTIER II TUNABLE WHITE

Closed Acrylic Interior Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.



LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Dimming: Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.

Acrylic: One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.

Finish: Highly durable oven cured no VOC premium powder coat.


Surge Protection: External surge protector provided as standard.

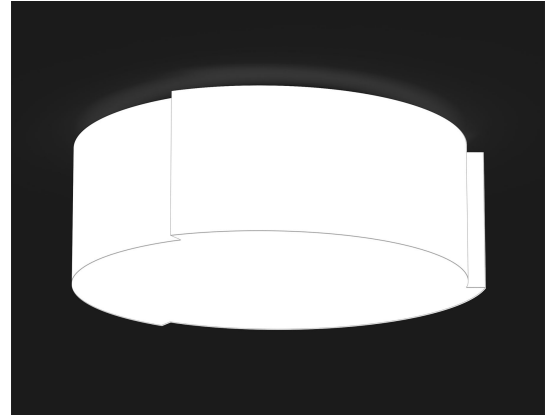


SAMPLE CATALOG NUMBER:				TW5-	S-	A-
GL-3507-				LAMPING	ACRYLIC	OPTIONS
GL-3507	W in 24"	mm 660		TW5	Standard: S Satin White Optional: WL White Linen JT Jute Linen Acrylic is UL-94 HB Flame Class rated.	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
	D in 9 3/4"	mm 250				
8lbs 4.5kg Fixture Painted White						
GL-3508	W in 30"	mm 950				
	D in 11 3/4"	mm 300				
12lbs 5.5kg Fixture Painted White						

All Dimensions are nominal.


Acrylic Lens



Satin White



White Linen



Jute Linen

Standard white satin bottom diffuser with all acrylic options.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
TW5	72	7467	2700-6500

Universal Voltage unless otherwise specified.