

# FRONTIER II WARM DIM

## Closed Acrylic Interior Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION



**Warm Dim:** LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 1% 0-10V dimming.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

**Acrylic:** One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.

**Finish:** Highly durable oven cured no VOC premium powder coat.

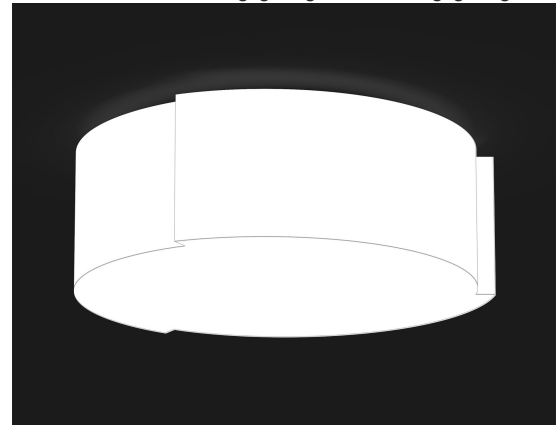


**Surge Protection:** External surge protector provided as standard.



SAMPLE CATALOG NUMBER:					WD5-	S-	A-
GL-3507-					LAMPING	ACRYLIC	OPTIONS
<b>GL-3507</b>	W in	24"	mm	660	<b>WD5</b>	<b>Standard:</b> <b>S</b> Satin White  <b>Optional:</b> <b>WL</b> White Linen <b>JT</b> Jute Linen  Acrylic is UL-94 HB Flame Class rated.	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
	8lbs D in	8"	mm	205			
Fixture Painted White  <b>GL-3508</b> W in 30" mm 950 12lbs D in 10" mm 255 5.5kg  Fixture Painted White							

All Dimensions are nominal.

### Acrylic Lens

	Satin White		White Linen		Jute Linen
---	-------------	---	-------------	---	------------

Standard white satin bottom diffuser with all acrylic options.

### Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
WD5	108W	7467	3500-1800

Universal Voltage unless otherwise specified.