

# GADSDEN TUNABLE WHITE

## Outdoor Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**Tunable White:** LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

**LED Tuning:** CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.



**LED Dimming:** Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.

**Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.

**Listing:** Fixture ETL listed for wet locations.

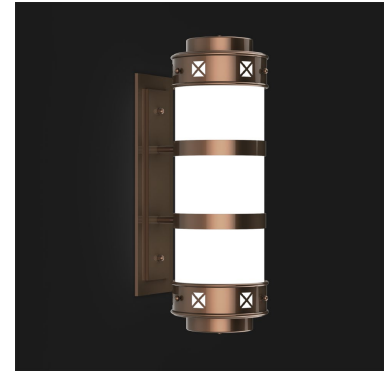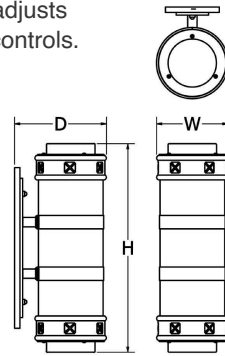

SAMPLE CATALOG NUMBER: GL-5300-						
MODEL NO.		TW1-	W-	NSN-	A	
LAMPING		ACRYLIC	FINISH	OPTION(S)		
<b>GL-5300</b> W in 6 5/8" mm 170 H in 20" mm 510 D in 8 1/2" mm 215		<b>TW1</b>  <b>TW2</b>	<b>Standard:</b> W. White Opal  <b>Optional:</b> S. Satin White  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze	<b>A. No Options</b>  <b>EL. Emergency LED</b> Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
TW1	14W	1017	2700-6500
TW2	28W	1992	2700-6500

Universal Voltage unless otherwise specified.

