

# GADSDEN

## Outdoor Sconce





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Body:** Spun .050 aluminum.
- Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for lamping options.
- Surge Protection:** External surge protector provided as standard.
- Listing:** Fixture ETL listed for wet locations.

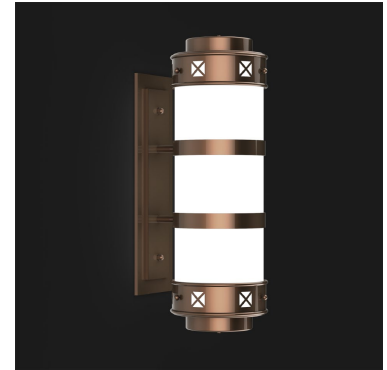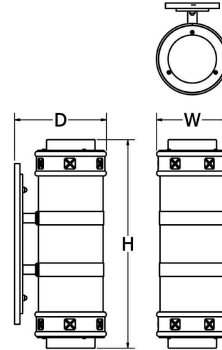

SAMPLE CATALOG NUMBER:					
GL-5300-		L15-	W-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
<b>GL-5300</b> W in 6 5/8" mm 170 H in 20" mm 510 D in 8 1/2" mm 215	<b>L10.</b> 1LED30 <b>L15.</b> 1LED35 <b>L14.</b> 1LED40 <b>L20.</b> 2LED30 <b>L25.</b> 2LED35 <b>L24.</b> 2LED40	<b>Standard:</b> W. White Opal  <b>Optional:</b> S. Satin White  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze  Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze	<b>A. No Options</b> <b>EL. Emergency LED</b> Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
L10	14	+80	50000	1017	3000
L15	14	+80	50000	1017	3500
L14	14	+80	50000	1017	4000
L20	28	+80	50000	1992	3000
L25	28	+80	50000	1992	3500
L24	28	+80	50000	1992	4000

Universal Voltage unless otherwise specified.

