

GLOBO TUNABLE WHITE

Acrylic Globe Indoor Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.



LED Dimming: Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.


Acrylic: Satin white acrylic with seam is UL-94 HB Flame Class rated.

Cable Hanger: Comes with 72" cable and cord for on-site adjustability. Canopy painted textured white.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.

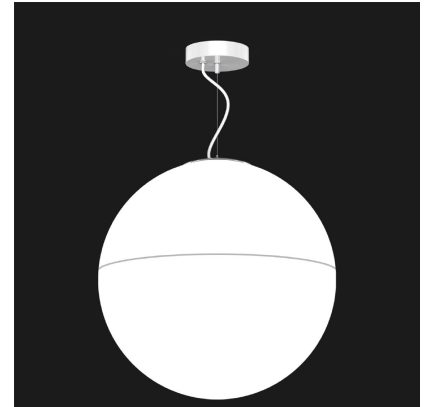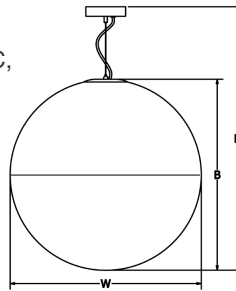

SAMPLE CATALOG NUMBER: GL-2801-					TW4-	1-	A
MODEL NO.					LAMPING	HANGER	OPTIONS
GL-2801	W in	24"	mm	610	TW4	1. Cable 	A. No Options
30lbs	B in	24"	mm	610			LC. 150" Cord & Cable Supplied with 150" Cord & Cable.
13.5kg	H in	30"-90"	mm	760-2285			EL. Emergency Ballast Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
Fixture Painted Textured White							
GL-2802	W in	30"	mm	760	TW4		
40lbs	B in	30"	mm	760			
18kg	H in	36"-96"	mm	915-2440			
Fixture Painted Textured White							

All Dimensions are nominal.

Light Source Definition

Fixture	Code	Total Wattage	Rated Life Hrs	Delivered Lumens
GL-2801	TW4	42	50000	4912
GL-2802	TW4	56	50000	6321

Universal Voltage unless otherwise specified.