

ILLUSION

Outdoor LED Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.


LED Dimming: 1% 0-10V dimming standard. Integral driver.

Body: Formed aluminum.

Finish: Highly durable oven cured no VOC premium powder coat.
Face plate painted textured white.

Surge Protection: External surge protector provided as standard.

Listing: Fixture ETL listed for wet locations.

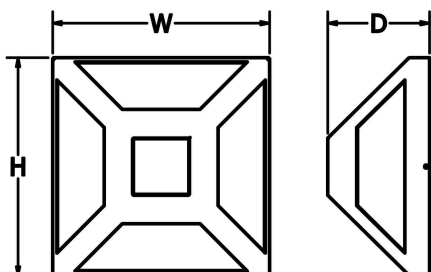

SAMPLE CATALOG NUMBER:

GL-6550-

E5-

NSN

MODEL NO.

LAMPING

FINISH

GL-6550 W in 12" mm 305
H in 12" mm 305
12lbs
5.5kg D in 5 1/2" mm 140

E0. 13LED30
E5. 13LED35
E4. 13LED40
G0. 20LED30
G5. 20LED35
G4. 20LED40

Standard:
Textured Powder
TLV-Light Verdigris
TWH-Textured White
TBL-Textured Black
TS-Textured Silver
TBN-Terra Brown
TBZ-Textured Bronze

GL-6555 W in 16" mm 405
H in 16" mm 405
15lbs
7kg D in 7" mm 180

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Kelvin	Board Lumens
13LED30	13W LED	+80	50000	3000	1500
13LED35	13W LED	+80	50000	3500	1500
13LED40	13W LED	+80	50000	4000	1500
20LED30	20W LED	+80	50000	3000	2000
20LED35	20W LED	+80	50000	3500	2000
20LED40	20W LED	+80	50000	4000	2000

Universal Voltage unless otherwise specified.