

# KETCH

## Indoor ADA Sconce





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs. Integral driver.
- LED Dimming:** 1% 0-10V dimming standard.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Custom:** Contact factory for custom lengths and lamping.
- Surge Protection:** External surge protector provided as standard.

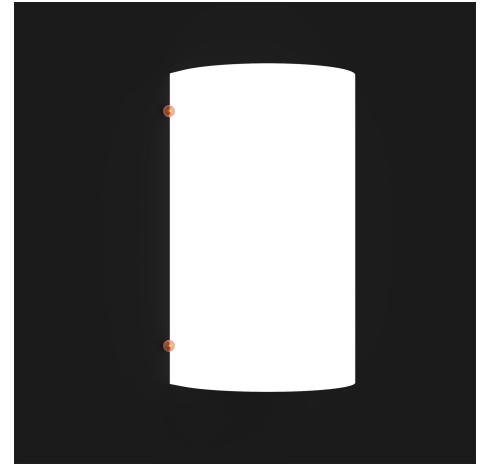

SAMPLE CATALOG NUMBER:				
GL-4565-	E5-	W-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-4565</b> W in 6 1/2" mm 165 H in 10" mm 255 D in 3 1/2" mm 90	<b>E0.</b> 1LED30 <b>E5.</b> 1LED35 <b>E4.</b> 1LED40	<b>Standard:</b> <b>W.</b> White Opal  <b>Optional:</b> <b>S.</b> Satin White <b>F.</b> Faux Alabaster <b>M.</b> Earth Marble <b>3N.</b> Linen Cast Resin  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBN-</b> Terra Brown <b>TBZ-</b> Textured Bronze	<b>A.</b> No Options <b>B.</b> Top White Perforated Diffuser Top perforated diffuser painted white. <b>C.</b> Bottom White Perforated Diffuser Bottom perforated diffuser painted white. <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Board Lumens	Kelvin
1LED30	10W	90	1050	3000
1LED35	10W	90	1050	3500
1LED40	10W	90	1050	4000

Universal Voltage unless otherwise specified.