
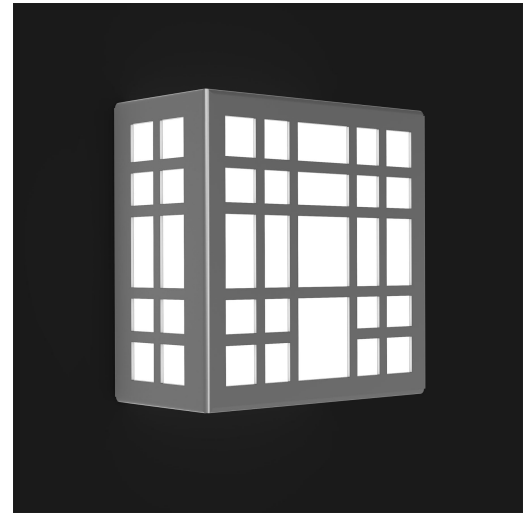


### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** 0-10V / 1-10V dimming to 1% standard.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Custom:** Contact factory for custom lamping.
- Driver:** Driver mounted in 4" square by 2 1/8" deep junction box:  
Steel City #52171 or equivalent (supplied by others)
- Surge Protection:** External surge protector provided as standard.

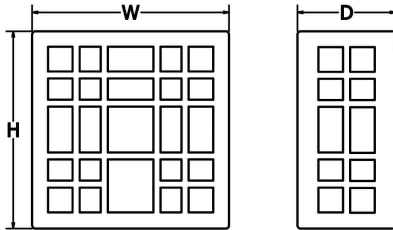

SAMPLE CATALOG NUMBER:				
GL-6515-	H5-	S-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-6515</b> W in 7" mm 180 H in 7" mm 180 4lbs D in 3 1/2" mm 90 2kg	<b>H0.</b> LED30 <b>H5.</b> LED35 <b>H4.</b> LED40	Standard: <b>W.</b> White Opal Optional: <b>S.</b> Satin White <b>F.</b> Faux Alabaster <b>M.</b> Earth Marble  Acrylic is UL-94 HB Flame class rated.	Standard: Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze  Textured Powder <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBN-</b> Terra Brown <b>TBZ-</b> Textured Bronze	<b>A.</b> No Options <b>B.</b> Top White Perf <b>C.</b> Bottom White Perf <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Rated CRI	Rated Life Hrs	Board Lumens	Board Kelvin
LED30	6W	+80	50000	950	3000
LED35	6W	+80	50000	950	3500
LED40	6W	+80	50000	950	4000

Universal Voltage unless otherwise specified.