


### GENERAL SPECIFICATION

LED: High efficiency high-power LEDs. Universal 120-277V input voltage.  
LED Dimming: Standard 1% 0-10V dimming.  
Body: Cast aluminum.  
Diffuser: UL-94 HB Flame Class rated.  
Standard Finishes: Highly durable oven cured no VOC premium powder coat.  
Surge Protection: External surge protector provided as standard.  
Mounting: Driver mounted in 4" square by 2 1/8" deep junction box.  
Steel City #52171 or equivalent (supplied by others).  
Modified: Contact factory for modified lumen packages.  
Listing: Fixture ETL listed for wet locations.

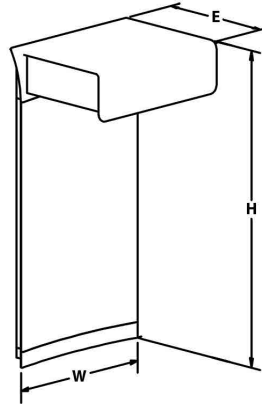

SAMPLE CATALOG NUMBER: GL-6615-					B-	R3-	PA-	A
MODEL NO.					LAMPING	OPTIC	FINISH	OPTION(S)
GL-6615	W in 5"	mm 127	H in 6"	mm 152	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO	R2. 20deg R3. 30deg R5. 50deg	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze	A. No Options <b>EL. Emergency LED</b> Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-6616	W in 5"	mm 127	H in 12"	mm 460	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO			
GL-6617	W in 5"	mm 127	H in 18"	mm 610	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO			
GL-6618	W in 5"	mm 127	H in 24"	mm 610	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO			
GL-6619	W in 5"	mm 127	H in 36"	mm 915	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO			

All dimensions are nominal.

### Light Source Definition

CODE	LED	Wattage	CRI	Rated Life Hrs	Source Lumens	Kelvin
A	1LED30	13W	+80	50000	1270	3000
B	1LED35	13W	+80	50000	1270	3500
C	1LED40	13W	+80	50000	1270	4000
D	1LED30HO	19W	+80	50000	1814	3000
E	1LED35HO	19W	+80	50000	1814	3500
F	1LED40HO	19W	+80	50000	1814	4000

Universal Voltage unless otherwise specified.