

MADERA

Interior ADA Fabric Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Shade: Standard white fabric shade. Custom shapes, sizes, and colors available.

Lamping: Standard lamping packages offer long lamp life, high power factor energy efficient electronic driver. 1% 0-10v dimming standard.



Acrylic: UL-94 HB Flame Class rated. Standard white opal top and bottom lens.

Standard Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lengths and lamping.

LED: Driver mounted in 4" square x 2 1/8" deep junction box:
Steel City #52171 or equivalent (supplied by others)

Surge Protection: External surge protector provided as standard.

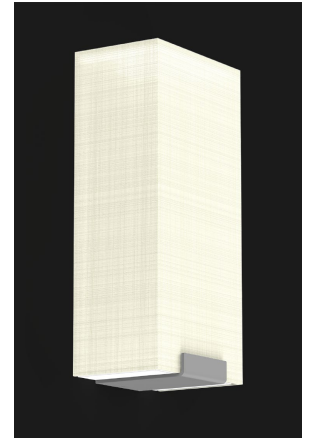

SAMPLE CATALOG NUMBER: GL-4700-		B-	W-	NSN-	A
MODEL NO.		LAMPING	SHADE	FINISH	OPTION(S)
GL-4700 W in 6" mm 150 H in 12 5/8" mm 320 4lbs 1.8kg D in 3 7/8" mm 100	A. 14LED30 B. 14LED35 C. 14LED40	W White C Cream R Red BL Blue O Olive S Stone	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze Premium: SA -Satin Aluminum	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. TD. Triac/ELV Dimming	
	GL-4701 W in 8" mm 205 H in 18" mm 460 5lbs 2.3kg D in 3 7/8" mm 100	A. 14LED30 B. 14LED35 C. 14LED40	Washable: WW White WC Cream WT Tan WB Brown		

All dimensions are nominal.

Shade

Standard	
	White
	Cream
	Blue
	Stone
	Red
	Olive
Washable - Trilam	
	White
	Tan
	Cream
	Brown

Custom fabrics available upon request. Contact factory. Reproduced graphic representation. Please contact sales@glighting.com for fabric samples.

Lamp Definition

Lamp	LED	Kelvin	CRI	Rated Life Hrs	Delivered Lumens
14LED30	14W	3000	80	50000	1120
14LED35	14W	3500	80	50000	1120
14LED40	14W	4000	80	50000	1120

Universal Voltage unless otherwise specified.