

# MAINBRACE

## Indoor ADA Sconce





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** Integral 1% 0-10V dimming driver standard.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Body:** Formed 18ga steel or .050 aluminum body. Painted white perforated top and bottom diffuser.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.
- Driver:** Powered by 350mA driver.

Driver mounted in 4" square by 2 1/8" deep junction box:  
Steel City #52171 or equivalent (supplied by others)

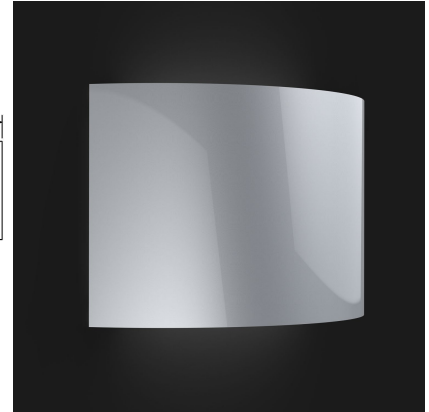

SAMPLE CATALOG NUMBER: GL-4570-					E5-	NSN-	A
MODEL NO.					LAMPING	FINISH	OPTION(S)
<b>GL-4570</b>	W in	12"	mm	305	<b>E0.</b> 1LED30 <b>E5.</b> 1LED35 <b>E4.</b> 1LED40	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBN</b> -Terra Brown <b>TBZ</b> -Textured Bronze	<b>A.</b> No Options <b>B.</b> Top White Perforated Diffuser Top perforated diffuser painted white. <b>C.</b> Bottom White Perforated Diffuser Bottom perforated diffuser painted white. <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
	H in	7"	mm	180			
	D in	4"	mm	100			

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Board Lumens	Kelvin
1LED30	13W	80	1895	3000
1LED35	13W	80	1895	3500
1LED40	13W	80	1895	4000

Universal Voltage unless otherwise specified.

