

# ORBIS - Acoustic

Inner Acrylic Interior Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

## GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs.

**Acoustic Panel:** 1/2" center acoustic panel reduces noise level in environment.

**Lower Output:** Lamping code ending with LO features lower lumen output.

**LED Dimming:** Standard 1% 0-10V dimming.

**Driver:** Max remote driver installation distance:

White LED 25ft from fixture body and RGB 45ft from fixture body.



See Orbis Hanger Guide for more information.

**RGB:** DMX controller supplied by others.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Mounting Plate:** Matches fixture finish.

**Surge Protection:** External surge protector provided as standard.

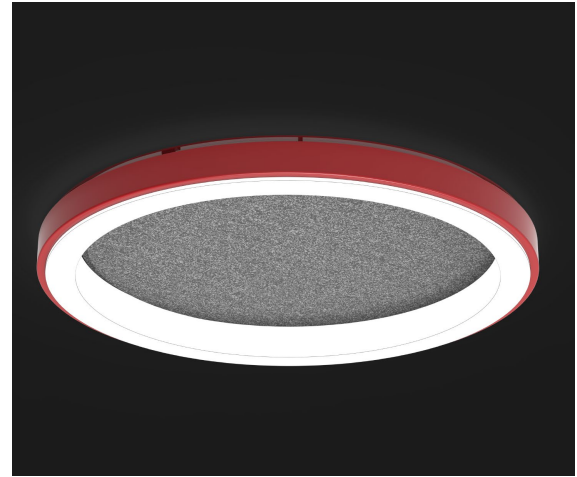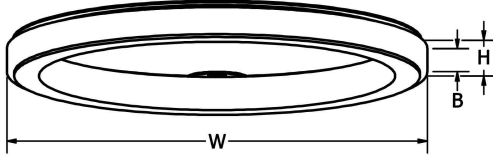

SAMPLE CATALOG NUMBER: GL-3792-		F-	BLK-	ABLK-	A
MODEL NO.	LAMPING	FINISH	ACOUSTIC	OPTIONS	
<b>GL-3790</b> W 24" 10lbs B 3" 4.5kg H 3.5"	<b>A.</b> 24LED30 <b>B.</b> 24LED35 <b>C.</b> 24LED40 <b>D.</b> RGB	<b>AL.</b> 24LED30LO <b>BL.</b> 24LED35LO <b>CL.</b> 24LED40LO	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBN</b> -Terra Brown <b>TBZ</b> -Textured Bronze  <b>Premium:</b> <b>SA</b> -Satin Aluminum*	<b>Standard:</b> Acoustic <b>ABLK</b> -Black <b>ABL</b> -Blue <b>AGR</b> -Gray <b>ALG</b> -Light Gray <b>ARD</b> -Red	<b>A.</b> No Options  <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-3791</b> W 36" 15lbs B 3" 6.8kg H 3.5"	<b>U.</b> 36LED30 <b>V.</b> 36LED35 <b>W.</b> 36LED40 <b>X.</b> RGB	<b>UL.</b> 36LED30LO <b>VL.</b> 36LED35LO <b>WL.</b> 36LED40LO			
<b>GL-3792</b> W 48" 15lbs B 3" 6.8kg H 3.5"	<b>E.</b> 48LED30 <b>F.</b> 48LED35 <b>G.</b> 48LED40 <b>H.</b> RGB	<b>EL.</b> 48LED30LO <b>FL.</b> 48LED35LO <b>GL.</b> 48LED40LO			
<b>GL-3793</b> W 60" 18lbs B 3" 8.2kg H 3.5"	<b>Y.</b> 60LED30 <b>Z.</b> 60LED35 <b>AA.</b> 60LED40 <b>BB.</b> RGB	<b>YL.</b> 60LED30LO <b>ZL.</b> 60LED35LO <b>AAL.</b> 60LED40LO			
<b>GL-3794</b> W 72" 22lbs B 3" 10kg H 3.5"  Fixture Built with Four Acrylic Segments	<b>I.</b> 72LED30 <b>J.</b> 72LED35 <b>K.</b> 72LED40 <b>L.</b> RGB	<b>IL.</b> 72LED30LO <b>JL.</b> 72LED35LO <b>KL.</b> 72LED40LO			

All Dimensions are nominal.

## Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens*	Kelvin
24LED30/35/40	54	+80	50000	4135	3000/3500/4000	24LED30LO/35LO/40LO	32	+80	50000	2481	3000/3500/4000
36LED30/35/40	76	+80	50000	7261	3000/3500/4000	36LED30LO/35LO/40LO	46	+80	50000	4357	3000/3500/4000
48LED30/35/40	106	+80	50000	10096	3000/3500/4000	48LED30LO/35LO/40LO	64	+80	50000	6058	3000/3500/4000
60LED30/35/40	131	+80	50000	12991	3000/3500/4000	60LED30LO/35LO/40LO	73	+80	50000	7143	3000/3500/4000
72LED30/35/40	152	+80	50000	14838	3000/3500/4000	72LED30LO/35LO/40LO	104	+80	50000	10159	3000/3500/4000
RGB	Contact Factory for Details										

Universal Voltage unless otherwise specified. \*Estimate