

# PORTLAND

## Interior ADA Sconce





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Diffuser:** Standard perforated white top and bottom diffuser.
- Acrylic:** UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for custom lengths or lamping options.
- Surge Protection:** External surge protector provided as standard.

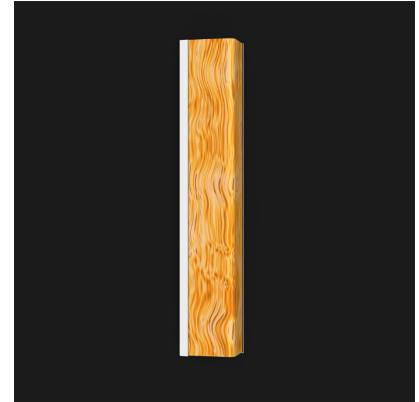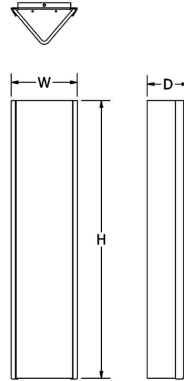

SAMPLE CATALOG NUMBER: GL-4630-					
		B5-	W-	NSN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-4630</b> W in 5 3/4" mm 145 H in 24" mm 610 7lbs 3.2kg D in 4" mm 100		<b>B0.</b> 2LED30 <b>B5.</b> 2LED35 <b>B4.</b> 2LED40	<b>Standard:</b> <b>W.</b> White Opal <b>Optional:</b> <b>S.</b> Satin White <b>F.</b> Faux Alabaster <b>M.</b> Earth Marble <b>3N.</b> Linen Cast Resin  <small>Acrylic is UL-94 HB Flame Class rated.</small>	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBN-</b> Terra Brown <b>TBZ-</b> Textured Bronze	<b>A.</b> No Options <b>EL.</b> Emergency LED <small>Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.</small>

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Board Lumens	Kelvin
2LED30	26W	80	3790	3000
2LED35	26W	80	3790	3500
2LED40	26W	80	3790	4000

<sup>1</sup>Per GE lamp products catalog

Universal Voltage unless otherwise specified.

