

SABER 3"

Indoor Pendant




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard.
- Driver:** Remote driver standard.
- Cable Hanger:** Comes with 120" powered suspension. Cables are field adjustable.
- Canopies:** Mounted with two canopies on flat or sloped ceilings up to 40°. Canopies match fixture finish.
- Mounting Centers (MC):**
 - GL-2685: 25.75"
 - GL-2686: 37.75"
 - GL-2687: 49.75"
 - GL-2688: 61.75"
- Acrylic:** Satin white seamless outer acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for lamping or cluster options.
- Surge Protection:** External surge protector provided as standard.

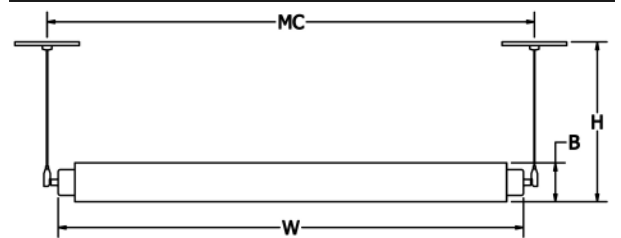

SAMPLE CATALOG NUMBER:						
GL-2685-		B-	S-	WH-	1-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	
GL-2685 W in 24" mm 650 B in 3" mm 75 6lbs H in 120" mm 1830 2.7kg MC in 25 3/4" mm 655	A. 26LED30 B. 26LED35 C. 26LED40	Standard: S Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze Premium: SA -Satin Aluminum	1. Cable Powered suspension with remote driver.	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. LPS. 180" Powered Suspension Fixture supplied with 180" cables.	
GL-2686 W in 36" mm 955 B in 3" mm 75 7lbs H in 120" mm 1830 3.2kg MC in 37 3/4" mm 960	D. 38LED30 E. 38LED35 F. 38LED40					
GL-2687 W in 48" mm 1260 B in 3" mm 75 8lbs H in 120" mm 1830 3.6kg MC in 49 3/4" mm 1265	G. 50LED30 H. 50LED35 I. 50LED40					
GL-2688 W in 60" mm 1565 B in 3" mm 75 10lbs H in 120" mm 1830 4.5kg MC in 61 3/4" mm 1570	J. 62LED30 K. 62LED35 L. 62LED40			 Powered suspension with integral driver.	Hanger option 1 supplied with remote driver box.	

Fixtures over 50 lbs require reinforced junction box
All dimensions are nominal.

Light Source Definition

Code	Lamp	Total Wattage	Delivered Lumens	Kelvin	Code	Lamp	Total Wattage	Delivered Lumens	Kelvin
A	26LED30	33W	2649	3000	G	50LED30	68W	6241	3000
B	26LED35	33W	2649	3500	H	50LED35	68W	6241	3500
C	26LED40	33W	2649	4000	I	50LED40	68W	6241	4000
D	38LED30	52W	4434	3000	J	62LED30	82W	7712	3000
E	38LED35	52W	4434	3500	K	62LED35	82W	7712	3500
F	38LED40	52W	4434	4000	L	62LED40	82W	7712	4000

Universal Voltage unless otherwise specified.

