

# SOPHIA

## Outdoor Sconce




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000


sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION


- LED: High efficiency mid-power LEDs are field serviceable.
- LED Dimming: 1% 0-10V dimming standard with LED lamping option.
- Body: Cast aluminum cap. Spun .50 aluminum shade.
- Acrylic: Cylinder is UL-94 HB Flame Class rated.
- Standard Finishes: Highly durable oven cured no VOC premium powder coat.
- Surge Protection: External surge protector provided as standard.
- Listing: Fixture ETL listed for wet locations.

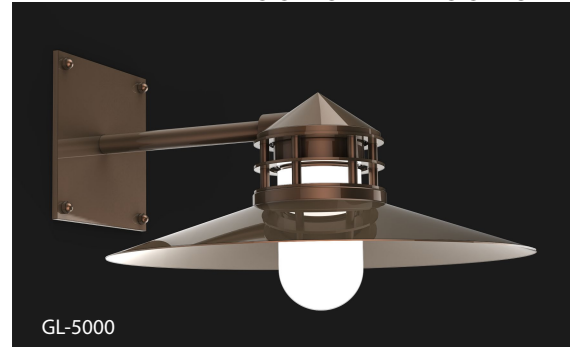

GL-5000

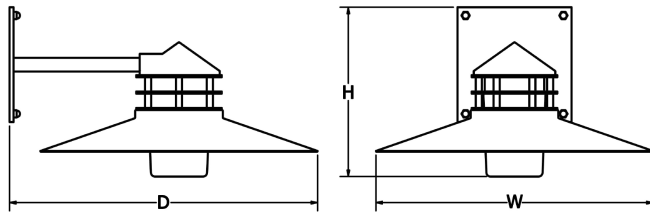

GL-5000 - Driver located in 4" square x 2 1/8" recessed box (supplied by other)



GL-5001 - Integral Driver

SAMPLE CATALOG NUMBER:					
GL-5000-		M15-	C-	NSN-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	OPTION(S)	
<b>GL-5000</b> W in 17" mm 430 H in 10" mm 255 D in 18" mm 460 10lbs 4.5kg	L10. 13LED30 # L15. 13LED35 # L14. 13LED40 # M10. 19LED30 # M15. 19LED35 # M14. 19LED40 #	<b>Glass:</b> A. White Opal Flat Bottom B. Frosted Round Bottom C. Clear Round Bottom D. Clear Prismatic Round Bottom <b>Polycarbonate:</b> F. Clear Prismatic Flat Bottom	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze	<b>A. No Options</b> <b>EL. Emergency LED</b> Consult factory. Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F.	
<b>GL-5001</b> W in 17" mm 430 H in 10" mm 255 D in 18" mm 460 10lbs 4.5kg	L10. 13LED30 L15. 13LED35 L14. 13LED40 M10. 19LED30 M15. 19LED35 M14. 19LED40	Acrylic is UL-94 HB Flame Class rated.			

All dimensions are nominal.  
# Driver located in 4" sq x 2 1/8" recessed box (supplied by others)

### Light Source Definition

Code	LED	Rated Life Hrs	Delivered Lumens	Kelvin	CRI
13LED30	13W LED	50000	911	3000	80
13LED35	13W LED	50000	911	3500	80
13LED40	13W LED	50000	911	4000	80
19LED30	19W LED	50000	1302	3000	80
19LED35	19W LED	50000	1302	3500	80
19LED40	19W LED	50000	1302	4000	80

Universal Voltage unless otherwise specified.

