

# TRAJECTORY

## Indoor Pendant




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Body:** 18ga steel or .050 aluminum.
- Hanger:** Comes with 72" cable and white cord for on-site adjustability.
- Canopy:** May be mounted on flat or sloped ceilings up to 40°.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for lamping or cluster options.
- Surge Protection:** External surge protector provided as standard.

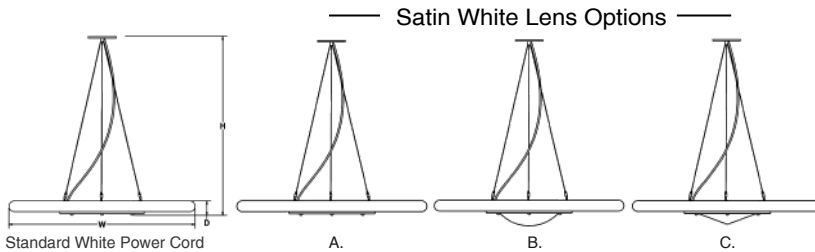

SAMPLE CATALOG NUMBER: GL-2292-				
MODEL NO.	LAMPING	LENS	FINISH	OPTION(S)
<b>GL-2290</b> 25lbs W in 29" mm 735 12 kg D in 2 5/8" mm 65 H in 72" mm 1830	<b>M0.</b> 5LED30 <b>M5.</b> 5LED35 <b>M4.</b> 5LED40	<b>Standard:</b> <b>A. Flat Lens</b> Satin white acrylic  <b>Optional:</b> <b>B. Dome Lens</b> <b>C. Cone Lens</b> Satin white acrylic	<b>Standard:</b> Powder Coat <b>BLK-Black</b> <b>BL-Blue</b> <b>GR-Gray</b> <b>LG-Light Gray</b> <b>BE-Beige</b> <b>PAB-Antique Brass</b> <b>PA-Painted Aluminum</b> <b>PTC-Painted Copper</b> <b>WH-White</b> <b>DBZ-Dark Bronze</b> <b>NSN-New Satin Nickel</b> <b>BRN-Brown</b> <b>RD-Red</b> <b>CH-Champagne</b> <b>RG-Reed Green</b> <b>SG-Sungold</b> <b>GM-Gun Metal</b> <b>POR-Oil Rubbed Bronze</b>  <b>Textured Powder</b> <b>TLV-Light Verdigris</b> <b>TWH-Textured White</b> <b>TBL-Textured Black</b> <b>TS-Textured Silver</b> <b>TBN-Terra Brown</b> <b>TBZ-Textured Bronze</b>  <b>Premium:</b> <b>SA-Satin Aluminum</b>	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. <b>LC. 150" Cord &amp; Cable</b> Fixture supplied with 150" of cable and standard white cord or optional black cord. <b>EL. Emergency LED</b> Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.  Multi-circuiting available upon request.
<b>GL-2291</b> 30lbs W in 35" mm 890 14 kg D in 2 5/8" mm 65 H in 72" mm 1830	<b>N0.</b> 7LED30 <b>N5.</b> 7LED35 <b>N4.</b> 7LED40			
<b>GL-2292</b> 38lbs W in 43" mm 1090 18kg D in 2 5/8" mm 65 H in 72" mm 1830	<b>P0.</b> 11LED30 <b>P5.</b> 11LED35 <b>P4.</b> 11LED40			

Fixtures over 50 lbs require reinforced junction box  
All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Source Lumens	Kelvin
M0	85	11910	3000
M5	85	11910	3500
M4	85	11910	4000
N0	113	15880	3000
N5	113	15880	3500
N4	113	15880	4000
P0	170	23820	3000
P5	170	23820	3500
P4	170	23820	4000

Universal Voltage unless otherwise specified.