
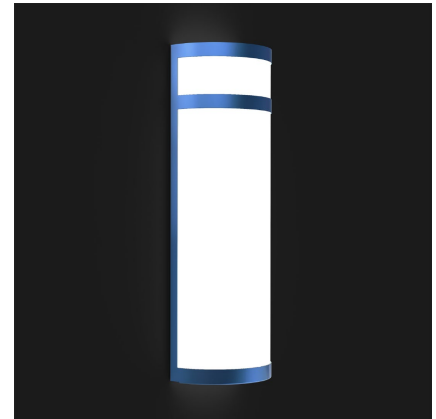


### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** Integral 1% 0-10V dimming driver standard.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Body:** Formed 18ga steel or .050 aluminum body.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Custom:** Contact factory for custom lengths and lamping.
- Surge Protection:** External surge protector provided as standard.

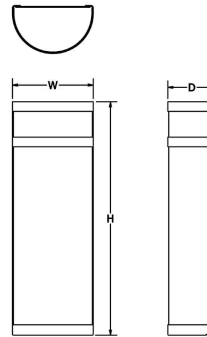

SAMPLE CATALOG NUMBER:					
GL-4595-		F5-	W-	NSN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-4595</b>	W in 6" mm 150	<b>F0.</b> 1LED30	<b>Standard:</b> <b>W.</b> White Opal <b>S.</b> Satin White  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze  Textured Powder <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBN-</b> Terra Brown <b>TBZ-</b> Textured Bronze	<b>A.</b> No Options <b>B.</b> Top White Perf <b>C.</b> Bottom White Perf <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
	H in 18" mm 460	<b>F5.</b> 1LED35			
	D in 4" mm 100	<b>F4.</b> 1LED40			

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Board Lumens	Kelvin
1LED30	14W	80	50000	1950	3000
1LED35	14W	80	50000	1950	3500
1LED40	14W	80	50000	1950	4000

Universal Voltage unless otherwise specified.