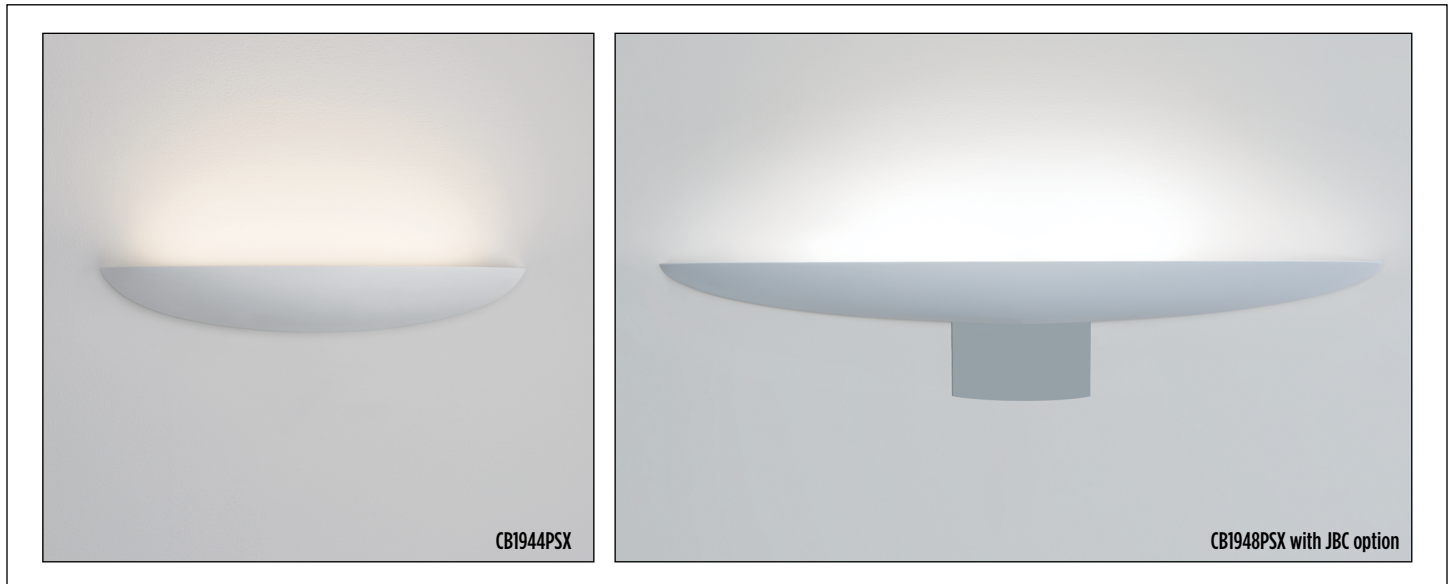


ESCAPE™

CB1944PSX_CB1948PSX Low Voltage


[Visalighting.com/products/Escape](https://visalighting.com/products/Escape)


Type: _____ Project: _____ Location: _____

DIMENSIONS¹


Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

	CB1944PSX	CB1948PSX
W	14-3/4" (375 mm)	26-1/2" (673 mm)
H	2" (51 mm)	
D	2-7/8" (73mm)	3-1/4" (83 mm)

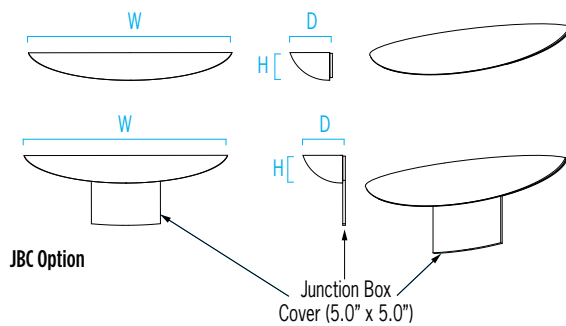


RELATIVE SCALE DRAWING

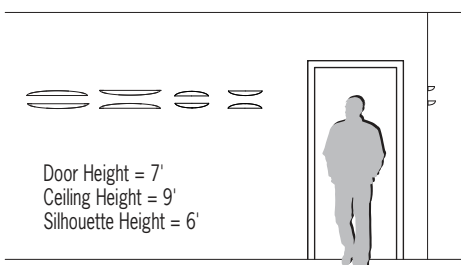


FEATURES

- Use with PS24 Series of 24VDC Class II remote power supplies. Each PS24 can power multiple fixtures and is available with 0-10V dimming. System costs are reduced by distributing the PS24 over multiple fixtures Low-voltage Class II wiring between the PS24 and connected fixtures simplifies installation. The PS24 is not included with fixtures; order separately.
- Modular design for replacement of LED source
- Uplight or downlight application
- Slim profile die cast aluminum housing
- Frosted acrylic top lens
- Optional high impact resistant, polycarbonate clear lens (CL option)
- No VOC powder coat paint finish
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS

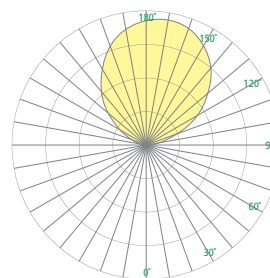

Diffuse lens (standard)

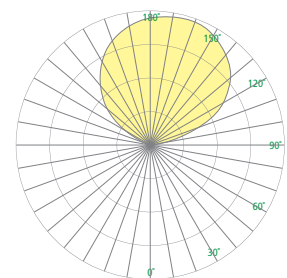

Clear lens option (CL)



ADA Compliant



ETL Listed



5 Year Warranty

ESCAPE (cont.)

CB1944PSX_CB1948PSX Low Voltage



Fill in shaded boxes using information listed below

- 24VDC				
MODEL¹ CB1944PSX CB1948PSX	SOURCE² L30K L35K L40K	VOLTAGE 24VDC	FINISH See last page for finish order codes	OPTION(S)³ CL JBC

Power supply is not included - Order Separately (See Accessories Section below)

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	CB1944PSX – 15"			CB1948PSX – 27"		
		Delivered Lumens		Power (Watts)	Delivered Lumens		Power (Watts)
		Diffuse Lens (Standard)	Optional Clear Lens (CL)		Diffuse Lens (Standard)	Optional Clear Lens (CL)	
L30K	3000K	450	550	9	900	1100	17
L35K	3500K						
L40K	4000K						

VOLTAGE

Watts are per fixture when operated with remote driver

24VDC	24VDC
-------	-------


OPTIONS³ (Multiple Selections Allowed)

CL	Clear, polycarbonate top lens, high impact resistant. Top Lens is frosted acrylic if no option is selected
JBC	Junction Box Cover (5" square) for use with an existing 4" junction box. Painted to match finish

ACCESSORIES (Order separately)

PS-24VDC90W01	24VDC 90 watt power supply; no dimming, specify 120V or 277V input. 75' maximum remote distance using 16 AWG wire. Express 10 day shipping option (XPS) available.
PS-24VDC90W02	24VDC 90 watt power supply; 0-10V dimmable to 10%, specify 120V or 277V input. 20' maximum remote distance. Express 10 day shipping option (XPS) available.

MOUNTING DETAIL (PSX Models)



ESCAPE (cont.)

CB1944PSX_CB1948PSX Low Voltage



ESCAPE PRODUCT FAMILY

Indoor	Line Voltage	15"	▪ CB1944
		27"	▪ CB1948
	Low Voltage – Remote Power Supply	15"	▪ CB1944PSX
		27"	▪ CB1948PSX
Outdoor	Low Voltage – Remote Power Supply	14"	▪ OW1940PSX
		27"	▪ OW1942PSX

SUGGESTED VARIATIONS

- Custom colors

See [Visalighting.com/products/Escape](https://visalighting.com/products/Escape) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLBK Velvet Black	VNRD Vineyard Red

Specialty Finish

Prime Primed for Painting