IMAGE™

CV1901_ CV1903_CV1905_CV1907 Indoor Wall/Ceiling



Visalighting.com/products/Image

Type: Project: Location:








DIMENSIONS¹

Depth is measured from wall to front of fixture 147 146 111


L = L	<u>.ength </u>	th D = Depth								
	CV1901	CV1903	CV1905	CV1907						
L	20-3/8" (518 mm)	25-7/8" (657 mm)	36-7/8" (937 mm)	47-7/8" (1216 mm)						
W	7-1/4" (184 mm)									
D	4" (102 mm)									

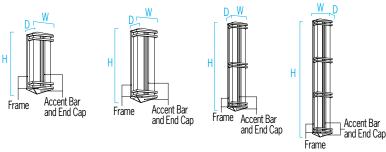


FEATURES

- · Integral driver
- Modular design for replacement of LED source and driver
- Removable cam-action hinged frame for ease of maintenance
- Ceiling mount or wall mount (horizontal or vertical orientation)
- Mounts to standard electrical junction box (by others) with provided hardware. Auxiliary mounting holes and hardware provided
- Extruded aluminum backplate, die-cast end caps with decorative cover, solid metal formed and extruded trim
- Extruded white, high impact acrylic diffuser
 - F1 rated, UV stable
 - UL-94 HB Flame Class rated
- No VOC powder coat paints; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING



PHOTOMETRICS











ADA Compliant ETL Listed

5 Year Warranty

IMAGE (cont.) CV1901_CV1903_CV1905_CV1907 Indoor Wall/Ceiling



Fill in shaded boxes using information listed below MVOLT MODEL1 OPTION3 SOURCE² **VOLTAGE** FRAME FINISH **ACCENT BAR AND** CV1901 **END CAP FINISH** DCC • L30K(H) MVOLT See last page XPS CV1903 • L30K(L) for finish See last page CV1905 L35K(H) order codes for finish CV1907 L35K(L) order codes • L40K(H) See page 1 • L40K(L)

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

		CV19	01	CV1903		CV1905		CV1907	
SOURCE	ССТ	Delivered Lumens			vered Power Deliveronens (Watts) Lumen		Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	1200	15	1700	19	2500	29	3400	38
• L30K(L)	3000K	800	9 1100		13	1700	19	2300	25
L35K(H)	3500K	1200	15	1700	19	2500	29	3400	38
L35K(L)	3500K	800	9	1100	13	1700	19	2300	25
• L40K(H)	4000K	1300	15	1700	19	2600	29	3500	38
• L40K(L)	4000K	850	9	1100	13	1700	19	2300	25

VOLTAGE

MVOLT 120-277V, 50/60 Hz

OPTION³ (Multiple selections allowed)

▲ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

IMAGE (cont.) CV1901_CV1903_CV1905_CV1907 Indoor Wall/Ceiling



IMAGE PRODUCT FAMILY

		20"	• CV1901			
lmdoor	Wall /Cailing	26"	• CV1903			
Indoor	Wall/Ceiling	37"	• CV1905			
		48"	• CV1907			
		20"	• CV1903 • CV1905			
Outdoor	Wall	26"	• OW1291 • OW1293 • OW1295			
Outdoor	Wall	37"				
		48"	• 0W1297			

See <u>Visalighting.com/products/Image</u> for more information

SUGGESTED VARIATIONS

- Custom colors
- Custom bar arrangements/additions
- Fixture lengths

IMAGE (cont.) CV1901_ CV1903_CV1905_CV1907 Indoor Wall/Ceiling



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard) for Frame or Accent Bar and End Cap Finish

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOR	Deoro Gold	GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red

Alternative Metal Finishes (Premium) for Accent Bar and End Cap only



Metal Finishes (Premium) for Accent Bar and End Cap only

