
INFINITY™ PERFORMANCE

CP5020 AND CP5022 8' and 16' Circles



Visalighting.com/products/Infinity-Performance

Type: _____ Project: _____ Location: _____

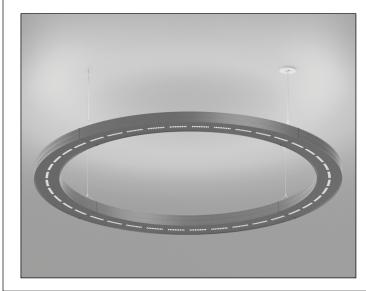




DIMENSIONS 1, 6

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(24) indicates an overall fixture height of 24"


▲ 0AH must be specified

DIA = Diameter OAH = Standard Overall Height

	CP5020	CP5022						
DIA	96" (2438 mm)	192" (4877 mm)						
OAH	24" (610 mm)							




RELATIVE SCALE DRAWING



FEATURES

- Integral LED driver
- Modular design for replacement of LED source and driver
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Configurable segments available to create unique shapes for general illumination and architectural expression. See KT Series for component segments
- Patented Power Art Cable™ mounting system uses a braided stainless steel
 jacket to encapsulate power conductors and provide support; single circuit
- Rated for loads up to 150 lbs (ETL listed)
- Clear prismatic top lens for ease of maintenance and preservation of optical integrity
- Mounts to standard electrical junction box (by others) with provided hardware. For T-bar installation, Caddy 512HD or equivalent (by others) is required at each mounting location
- Extruded aluminum side panels with architectural reveal and fabricated bottom housing
- No VOC powder coat paint
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS








INFINITY PERFORMANCE (cont.)

CP5020 AND CP5022 8' and 16' Circles



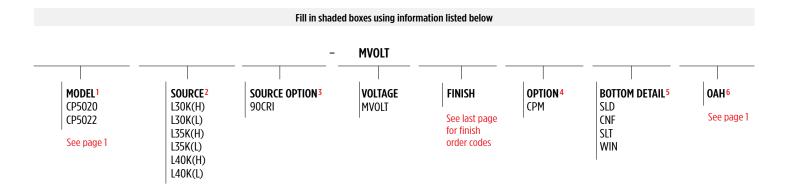

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

		CP5	020	CP5022			
SOURCE	ССТ	Delivered Lumens	Power (Watts)		Power (Watts)		
L30K(H)	3000K	34700	349	69500	698		
L30K(L)	3000K	22500	215	45100	430		
L35K(H)	3500K	34700	349	69500	698		
L35K(L)	3500K	22500	215	45100	430		
L40K(H)	4000K	35800	349	71600	698		
L40K(L)	4000K	23200	215	46500	430		

Wattages decrease by 59W (CP2020) and 119W (CP2022) when bottom detail is solid.

SOURCE OPTION³

OPTION⁴

СРМ	Canopy painted to match

BOTTOM DETAIL⁵ (Select one)

Cutouts backed by white acrylic

SLD	Solid				
CNF	Confetti				
SLT	Slots				
WIN	Windows				





CONFETTI (CNF)






WINDOWS (WIN)


VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------


HOUSING PROFILE



MOUNTING LOCATIONS







(Power Art Cable" can be field installed)

INFINITY PERFORMANCE (cont.)

CP5020 AND CP5022 8' and 16' Circles



INFINITY PERFORMANCE PRODUCT FAMILY

	4'	• CP5002
Arc	8'	• CP5004
	10'	• CP5006
Straight	4'	• CP5014
Circlo	8'	• CP5020
Circle	16'	• CP5022
KT Series		KT5000 Series

See <u>Visalighting.com/products/Infinity-Performance</u> for more information

SUGGESTED VARIATIONS

- · Custom color or material
- Color LEDs
- Color diffuser
- Custom cutouts or logos in bottom detail
- · Direct downlight
- RGB

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOR	Deoro Gold	GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red