
# OW2482 PASSAGE™

### 2 X 4 Junction Box Mount with Integral Power Supply



Visalighting.com/products/Passage

Project: Type: Location:

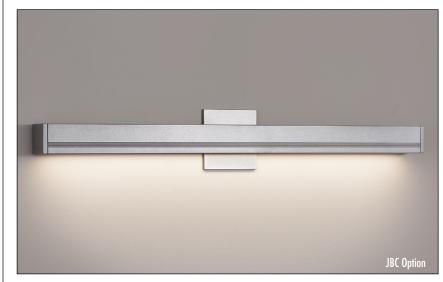




#### DIMENSIONS

Depth is measured from wall to front of fixture

L = Length H = Height D = Depth

37-1/4" (946 mm) 2-1/2" (64 mm) D 2-3/4" (70 mm)




Use JBC option for 4x4 octagonal or rectilinear junction box


#### **FEATURES**

- High or low lumen output
- Luminous or Forward Throw output
- Modular design for replacement of LED source or driver
- Integral high power factor electronic power supply
- Orient as uplight or downlight
- · Optional dual circuit switching
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- Surface mount to 2x4 junction box. Optional junction box cover (JBC) available for 4x4 junction box
- Tamper resistant fasteners
- Polycarbonate diffuser
- No VOC powder coat paint finish; metal based sublimated wood look finish
- ETL Listed for wet location mounting 4' above grade


#### RELATIVE SCALE DRAWING



#### **PHOTOMETRICS**



LUM (Luminous Lens)



FT (Forward Throw Optic)









5 Year Warranty

# OW2482 PASSAGE (cont.)

## 2 X 4 Junction Box Mount with Integral Power Supply




#### Fill in shaded boxes using information listed below **0W2482** MVOLT MODEL SOURCE1 **VOLTAGE** OPTIC<sup>2</sup> FINISH OPTION3 L30K(H) MVOLT LUM DS See last page L30K(L) FT JBC for finish L35K(H) order codes L35K(L) L40K(H) L40K(L)

#### SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 82CRI, within 3-step MacAdam

Source	ССТ	Delivered Lumens	Delivered Lumens	Power (Watts)
L30K(H)	3000K	2700	1900	40
L30K(L)	3000K	900	650	14
L35K(H)	3500K	2700	1900	40
L35K(L)	3500K	900	650	14
L40K(H)	4000K	2700	1900	40
L40K(L)	4000K	900	650	14

### PATH OF EGRESS - LUMINOUS LENS



OW2482 -H Downlight, Mounted at 10' AFF, .70 light loss factor used

#### PATH OF EGRESS - FORWARD THROW



OW2482 -H Downlight, Mounted at 10' AFF, .70 light loss factor used

#### **VOLTAGE**

MVOLT	120-277V, 50/60 Hz

#### OPTIC<sup>2</sup> (Select one)

LUM	Luminous Lens
FT	Forward Throw Optic


#### OPTION(S)<sup>3</sup> (Multiple Selections Allowed)

Option availability may be interdependent with 0ther 0ptions

DS	Dual circuit switching (includes 2 drivers). Lumen output and wattage is split in half for each circuit
JBC	Adaptor plate and decorative cover for 4x4 octagonal or square junction box. Finish matches canopy and housing

#### JUNCTION BOX COVER (JBC option) MOUNTING DETAIL

Backplate includes 5" wide x 6" high Junction Box Cover for 4x4 junction box



# OW2482 PASSAGE (cont.)

### 2 X 4 Junction Box Mount with Integral Power Supply



#### PASSAGE PRODUCT FAMILY

- OW2480 37" Mullion Mount with Remote Power Supply
- OW2482 37" 2 X 4 Junction Box Mount with Integral Power Supply
- OW2484 72" Mullion Mount with Remote Power Supply
- OW2486 72" 2 X 4 Junction Box Mount with Integral Power Supply

SUGGESTED VARIATIONS

· Custom colors

See <u>Visalighting.com/products/Passage</u> for more information

#### **FINISHES**

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)



Wood Sublimated Metal Finishes (Premium)



