# OW2308 SCOPE™

## Acrylic Upper Body – Cast Lower Body/No Downlight



VisaLighting.com/products/Scope

Project: Location: Type:






#### **DIMENSIONS**

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

W 3-7/8" (98 mm) Н 15" (381 mm) 5-1/4" (133 mm) D **D** (with JBC option) 5-1/2" (140 mm)


For mullion mounting: Minimum required mullion width is 3"



#### **FEATURES**


- Integral driver (unless RMD option is selected)
- 0-10V dimming to 10%
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- May be mounted in inverse position
- Surface mount to 2x4 junction box or window mullion. Mullion mount requires RMD option and minimum 3" mullion. Optional junction box cover (JBC) is available for 4x4 or octagonal junction box
- Tamper resistant fasteners
- Frosted 1/4" high impact grade acrylic (non-matte finish on end cap) and cast aluminum body
- No VOC powder coat paint finish
- ETL listed for wet location

### RELATIVE SCALE DRAWING



#### **PHOTOMETRICS**

VisaLighting.com












# OW2308 SCOPE (cont.)

## Acrylic Upper Body – Cast Lower Body/No Downlight



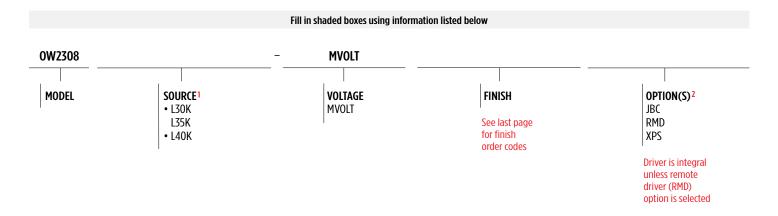

#### SOURCE¹ (Select one)

Minimum 90CRI, within 3-step MacAdam Dimmable 0-10V to 10%

Source	ССТ	Delivered Lumens	Power/Watts			
• L30K(H)	3000K		15			
L35K(H)	3500K	1000				
• L40K(L)	4000K					

#### **VOLTAGE**

MVOLT	120-277V, 50/60 Hz
-------	--------------------

#### **LUMEN MAINTENANCE RATING**

L70	55,000hrs


#### OPTIONS<sup>2</sup> (Multiple Selections Allowed)

Integral driver unless Remote Driver (RMD) is selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

JBC	Junction box cover (4-1/2" square) for use with an existing 4" octagonal junction box. Painted to match finish
RMD	Remote mounted driver (required for mullion mount)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

#### REMOTE DRIVER (RMD) INFORMATION




Maximum Recommended Remote Wiring Distance from **RMD** to fixture canopy

- 10GA 1400 ft
- 12GA 900 ft
- 14GA 550 ft
- 16GA 350 ft
- 18GA 200 ft


Remote driver boxes have knockouts for conduit connections

#### JUNCTION BOX COVER (JBC option) MOUNTING DETAIL



JBC option increases depth (D) by 1/4"

# OW2308 SCOPE (cont.)





#### SCOPE PRODUCT FAMILY

• 0W2300	Cast Body - Downlight & Uplight
• 0W2302	Luminous Acrylic Body
• 0W2304	Acrylic Upper Body - Cast Lower Body w/ Downlight
• 0W2306	Cast Body - Downlight (or Uplight) Only
• 0W2308	Acrylic Upper Body - Cast Lower Body/No Downlight

See <u>Visalighting.com/Products/Scope</u> for more information

#### SUGGESTED VARIATION

- · Custom finish colors
- Colored diffusers
- Alternate beam angles
- · Reduced lumen output

#### **FINISHES**

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BJBG	Baja Beige	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue
DEOR	Deoro Gold	GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR S	Shoreline Grey
SBGN	Sagebrush Green	SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red