


Type: _____ Model: _____

Project: _____



CITATION

LED Pole Mount

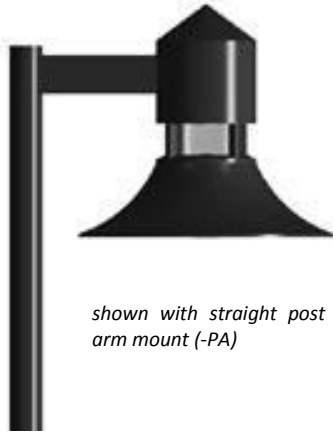


shown with straight post arm mount (-PA)





Dome Top

Cone Top



shown with post top shepherd's crook mount (-PTS)



General: The open birdcage and swept shade of the Citation provides a decorative uplight component in a classic fixture. Appropriate for pedestrian scale installations, the varied mounting configurations provide an appeal across a variety of installations.

Construction: Top, housing, and mounting gear are constructed of low copper content cast aluminum. Shade shall be spun aluminum. Stainless steel external hardware to protect against the exterior elements.

Lens: Glass globe available in opal (-OL) or clear (-CL).

Tops: Two (2) top styles available: Cone (-C) (straight arm only) and Dome (-D).

LED Light Engine: LED module located in upper housing with LED module offering 37 nominal input watts. Available in color temperatures of 3000K, 3500K, 4000K, and 5000K. Minimum CRI = 80.

Driver: Constant current LED driver; input voltage of 120v to 277v, internally mounted.

Heat Sink: Finned heat sink shall be extruded aluminum and shall be located in housing above LED module.

Mounting: Three (3) pole mount styles available: straight pole arm (-PA), post top shepherds crook (-PTS), and side arm shepherds crook (-PAS).

Pole: See Intrigue "Pole Specification Guide" for product detail.

Finish: Textured polyester powder coat finish. Shade underside is standard white finish. Black, bronze, grey, white, silver, and verde green options available. For woodgrain finish and custom colors, consult factory.

Gaskets: EPDM gaskets standard.

EPA and Weight:	EPA	PA	0.71ft ²
		PTS	0.88ft ²
		PAS	0.90ft ²
	Weight	PA	26 lbs
		PTS	27 lbs
		PAS	28 lbs

Listings: ETL Listed to UL 8750. IESNA LM79.



Type: _____ Model: _____

Project: _____



SERIES MOUNTING WATTAGE CCT (kelvin) TOP STYLE LENS VOLTAGE FINISH

FIXTURE DETAIL

SERIES **CT** Citation Pole Mount

MOUNTING **PA** Straight Arm Pole Mount
 PAS Side Arm Shepherds Crook Mount
 PTS Post Top Shepherds Crook Mount

WATTAGE **37LED** 37 input watts

Nominal Watts	Nominal Lumens	Lumens/Watt (LPW)	CCT (Kelvin)	CRI	Rated Life (L85)	Drive Current (mA)	Nominal Voltage
	3,700	100	3000				
37	3,750	101	3500	> 80	50,000 hrs	700mA	48.0
	3,750	101	4000				
	3,800	103	5000				

COLOR (kelvin) **30K** 3000K
 35K 3500K
 40K 4000K
 50K 5000K

TOP STYLE **C** Cone
 D Dome

LENS **CL** Clear Glass Globe
 OL Opal/Translucent Glass Globe

VOLTAGE **UNV** 120v – 277v; output current 700mA

FINISH **BLK** Black finish **VGN** Verde Green finish
 BRZ Bronze finish **WHT** White finish
 GRY Grey finish **CC** Custom Color – consult factory
 SIL Silver finish **WGF** Woodgrain finish – consult factory

IES files can be found on website.

Content of specification sheets is subject to change. Please consult website for current product detail.



www.intrigueled.com

N60 W14592 Kaul Avenue Menomonee Falls, WI 53051

P: (877) 965 0005

F: (262) 436 1745