

Fixture Type: _____

Model Number: _____

Project Name: _____




CURV

Decorative Architectural LED Bollard



Dimensions

Height (A)	36" (915mm)
Height (B)	32½" (824mm)
Base² (C)	6" (155mm)
Width (D)	14¼" (362mm)

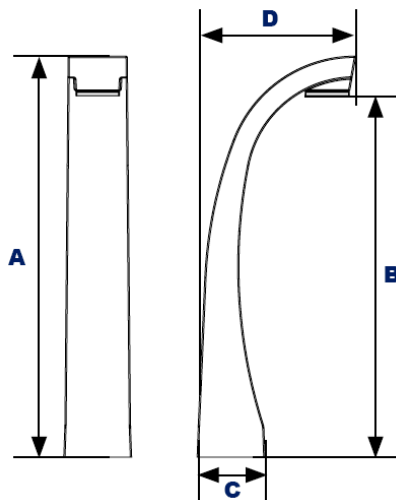

Overview: The nautically inspired Curv bollard provides pedestrian and pathway area lighting with a seaside flair. The specially designed optics offer precisely controlled, uniform lighting ideal for a wide range of installations including parking areas, walkways and landscape accents.

Housing: Durable single-piece sand cast aluminum housing features 1/2" thick walls. Includes flush mounting base and vandal-resistant hardware. An internal driver tray is standard for ease of maintenance.

Finish: Textured architectural bronze (BRZ) or textured architectural black (BLK) powder coat finish over a chromate conversion coating. For custom colors, please consult factory.

Lens: Standard with clear, UV-stabilized polycarbonate vandal-resistant lens.

Mounting: Standard with 8" zinc-plated anchor bolts.

Wattage: 12-watt: Array = 12.0 watts / System = 13.6 watts
18-watt: Array = 18.2 watts / System = 20.4 watts

Driver: Electronic driver, 120-277V, 50/60Hz; <20% THD and PF>0.90. Standard with internal surge protection 2kV. 0-10V dimming standard for a dimming range of 100% down to 10%. Dimming source current is 150 Microamps.

Controls: Factory installed motion sensor controls are wired for switching and/or 1-10V dimming within housing; remote direct wired interface of 1-10V dimming is not implied and may not be available. Tested with OEM controls and may not function properly with controls supplied by others. *NOT designed for use with line voltage dimmers.*

Certifications: CSA: Listed for Wet Locations
ANSI/UL 1598, 8750
IP65 Sealed LED Compartment
Operating Temperature: -40°C to +50°C
5-Year Warranty



IP 65



content of specification sheet is subject to change.

N60 W14592 Kaul Avenue
Menomonee Falls, WI 53051

P 877 965 0005
intrigueled.com

Fixture Type: _____

Model Number: _____

Project Name: _____




PHOTOMETRIC SPECIFICATIONS

Projected Lumen Maintenance

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 20w	1.00	0.96	0.92	0.85	196,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.90	0.81	0.62	78,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.96	0.85	0.92	126,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.

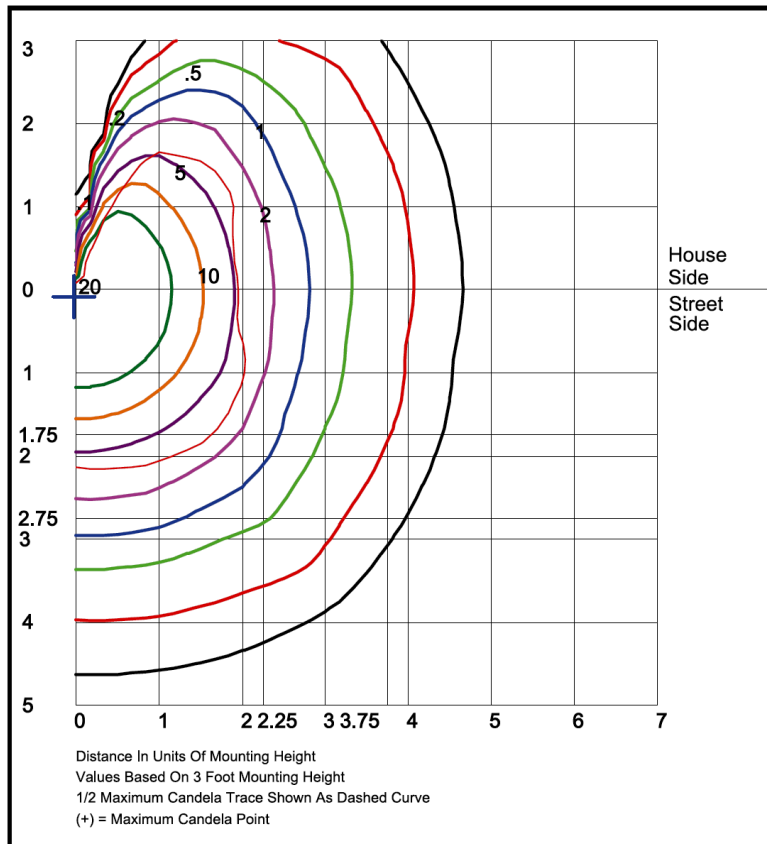

Optic	Wattage (Catalog Logic)	12W (1X12)	18W (1X18)
	Input Watts	13.6W	20.4W
	CCT	Delivered Lumens	
Clear Glass	3000K	1,427	2,140
	4000K	1,548	2,322
	5000K	1,612	2,418
	BUG Rating	B1-U0-G1	B1-U0-G1

CRV-5-B-18LED-5K-F-CPL



IP 65



content of specification sheet is subject to change.

N60 W14592 Kaul Avenue
Menomonee Falls, WI 53051

P 877 965 0005
intrigueled.com

Fixture Type: _____

Model Number: _____

Project Name: _____



SERIES	DIAMETER	MOUNTING	WATTAGE	COLOR (K)	LENS	DISTRIBUTION	OPTIONS	VOLTAGE	HEIGHT	FINISH
CRV	5	B			CPL	TY3		UNV	32	

MODEL NUMBER DETAIL

SERIES	<input type="checkbox"/> CRV	Curv Architectural LED Bollard
DIAMETER	<input type="checkbox"/> 5	5" Diameter
MOUNTING	<input type="checkbox"/> B	Bollard
WATTAGE	<input type="checkbox"/> 12LED <input type="checkbox"/> 18LED	12-watt LED Module 18-watt LED Module
LED COLOR (K)	<input type="checkbox"/> 3K <input type="checkbox"/> 4K <input type="checkbox"/> 5K	3000K 4000K 5000K
LENS	<input type="checkbox"/> CPL	Clear Polycarbonate Vandal Resistant Lens
DISTRIBUTION	<input type="checkbox"/> TY3	Type III Distribution
OPTIONS	<input type="checkbox"/> SF <input type="checkbox"/> DF <input type="checkbox"/> GFI <input type="checkbox"/> SP	Single Fuse Double Fuse GFCI Outlet, 15A, 120V (<i>side mount only</i>) Surge Protection
VOLTAGE	<input type="checkbox"/> UNV	Universal Voltage (120v-277v) (50/60Hz); electronic dimmable driver
HEIGHT	<input type="checkbox"/> 32	32-1/2" Overall Height
FINISH	<input type="checkbox"/> BLK <input type="checkbox"/> BRZ <input type="checkbox"/> CC	Black Bronze Custom Color - Consult Factory



IP 65



content of specification sheet is subject to change.

N60 W14592 Kaul Avenue
Menomonee Falls, WI 53051

P 877 965 0005
intrigueled.com

Aug-21