


Type: \_\_\_\_\_ Model: \_\_\_\_\_

Project: \_\_\_\_\_



# ELEGANT

## LED Pole Mount

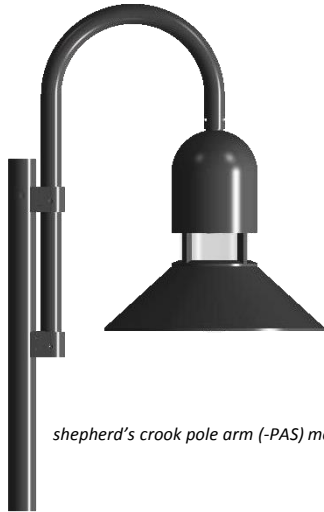




shepherd's crook pole arm (-PAS) mount



Dome Top



Cone Top

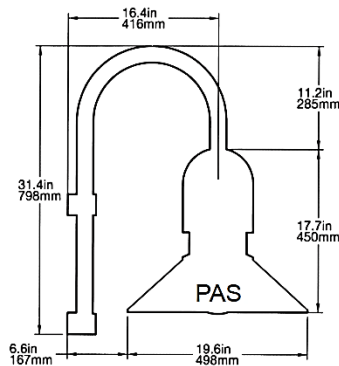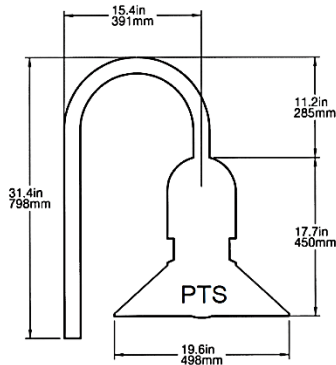

**General:** The open birdcage style of the Elegant series provides a decorative uplight component in a classic fixture. Appropriate for pedestrian scale installations, the varied mounting configurations provide an aesthetic appeal across a variety of installations.

**Construction:** Top, housing, and mounting gear are constructed of low copper content cast aluminum. Shade shall be spun aluminum. Stainless steel external hardware to protect against the exterior elements.

**Lens:** Glass globe available in opal (-OL) or clear (-CL).

**Tops:** Two (2) top styles available: Cone (-C) (straight arm only) and Dome (-D).

**LED Light Engine:** LED module located in upper housing with LED module offering 37 nominal input watts. Available in color temperatures of 3000K, 3500K, 4000K, and 5000K. Minimum CRI = 80.

**Driver:** Constant current LED driver; input voltage of 120v to 277v, internally mounted.

**Heat Sink:** Finned heat sink shall be extruded aluminum and shall be located in housing above LED module.

**Mounting:** Three (3) pole mount styles available: straight pole arm (-PA), post top shepherds crook (-PTS), and side arm shepherds crook (-PAS).

**Pole:** See Intrigue "Pole Specification Guide" for product detail.

**Finish:** Textured polyester powder coat finish. Shade underside is standard white finish. Black, bronze, grey, white, silver, and verde green options available. For woodgrain finish and custom colors, consult factory.

**Gaskets:** EPDM gaskets standard.

<b>EPA and Weight:</b>	EPA	PA	0.71ft <sup>2</sup>
		PTS	0.88ft <sup>2</sup>
		PAS	0.90ft <sup>2</sup>
<b>Weight</b>	PA	26 lbs	
	PTS	27 lbs	
	PAS	28 lbs	

**Listings:** ETL Listed to UL 8750. IESNA LM79.



Type: \_\_\_\_\_ Model: \_\_\_\_\_

Project: \_\_\_\_\_



SERIES MOUNTING WATTAGE CCT (kelvin) TOP STYLE LENS VOLTAGE FINISH

## FIXTURE DETAIL

**SERIES**  **EL** Elegant Pole Mount

**MOUNTING**  
 **PA** Straight Arm Pole Mount  
 **PAS** Side Arm Shepherds Crook Mount  
 **PTS** Post Top Shepherds Crook Mount

**WATTAGE**  **37LED** 37 input watts

Nominal Watts	Nominal Lumens	Lumens/Watt (LPW)	CCT (Kelvin)	CRI	Rated Life (L85)	Drive Current (mA)	Nominal Voltage
	3,700	100	3000				
37	3,750	101	3500	> 80	50,000 hrs	700mA	48.0
	3,750	101	4000				
	3,800	103	5000				

**COLOR (kelvin)**  
 **30K** 3000K  
 **35K** 3500K  
 **40K** 4000K  
 **50K** 5000K

**TOP STYLE**  
 **D** Dome  
 **C** Cone

**LENS**  
 **CL** Clear Glass Globe  
 **OL** Opal/Translucent Glass Globe

**VOLTAGE**  
 **120** 120v; 50/60Hz; output current 900mA  
 **277** 277v; 50/60Hz; output current 900mA

**FINISH**  
 **BLK** Black finish  
 **BRZ** Bronze finish  
 **GRY** Grey finish  
 **SIL** Silver finish  
 **VGN** Verde Green finish  
 **WHT** White finish  
 **CC** Custom Color – consult factory  
 **WGF** Woodgrain finish – consult factory

IES files can be found on website.

Content of specification sheets is subject to change. Please consult website for current product detail.



www.intrigueled.com

N60 W14592 Kaul Avenue Menomonee Falls, WI 53051  
P: (877) 965 0005 F: (262) 436 1745