

Type: _____ Model: _____

Project: _____




LARGE EUROTECH

LED Pole Mount



shown with angled shade (-SHD)
shown with standard triple rings
standard tenon mount: 2-3/8" OD

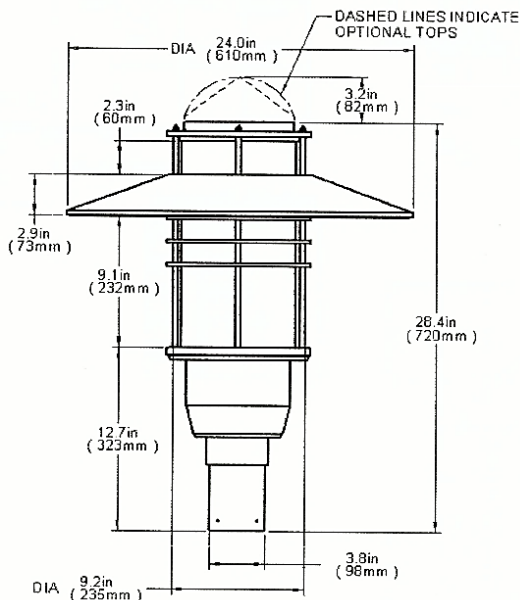

General: The modern and contemporary styling of the Large Eurotech is perfect for area and pedestrian scale lighting installations emphasizing artistic performance.

Construction: Fixture top, housing, and mounting gear are constructed of low-copper content cast aluminum. Stainless steel external fasteners and hardware to protect against corrosion.

Shade: Spun aluminum angled shade (SHD), spun copper shade (SHDCO), spun stainless steel shade (SHDSS), and stamped aluminum flat shade (SHDFLT) available. Underside of spun aluminum (SHD) and stamped aluminum (SHDFLT) shall have white finish.

Lens: Available lens options: Clear Acrylic (CA), Opal Acrylic (OA), Opal Polycarbonate (OP), Clear Glass (GL).

Optics: Stacked internal louvers to control glare are standard. Available without louvers (NL) and available with 180-degree houseside shield accessory.

Wattage: 24-watt, 38-watt, and 55-watt LED assemblies in color temperatures of 3000K or 4000K. CRI>70.

Driver: maximum output power = 60 watts; constant current, universal input voltage 120v-277v (50/60Hz); THD<20%. Power Factor >0.90. 0-10V dimming standard for a dim range of 100% down to 0.10%.

Heat Sink: Finned aluminum heat sink with black electrocoating securing heat sink to LED module.

Tops: Two (2) top styles available: Dome (D), Flush (F).

Mounting: Single fixture head mounts to standard pole top tenon (2-3/8" OD).

Poles: See Intrigue "Pole Specification Guide" for pole ordering details.


Finish: Textured polyester powder coat finish. Black, bronze, grey, white, silver, and verde green finishes available. For custom colors, please consult factory.

Gaskets: EPDM foam gaskets are standard.

EPA and Weight: EPA = 0.94ft²
Weight = 36 lbs



Listings: ANSI/UL 1598, 8750
Operating temperature: -40°C to +50°C
UL Listed 1598 for Wet Locations and
Indoor/Outdoor listed for use in Canada



www.intrigueled.com

N60 W14592 Kaul Avenue Menomonee Falls, WI 53051
P: (877) 965 0005 F: (262) 436 1745

Type: _____ Model: _____

Project: _____



SERIES MOUNTING WATTAGE COLOR (K) TOP STYLE LENS SHADE OPTIONS VOLTAGE FINISH

LET - PT - - - - - UNV -

FIXTURE DETAIL

SERIES	<input type="checkbox"/> LET	Large Eurotech Pole Mount	
MOUNTING	<input type="checkbox"/> PT	Post Top Tenon Mount (2-3/8" OD tenon)	
WATTAGE	<input type="checkbox"/> 24LED <input type="checkbox"/> 38LED <input type="checkbox"/> 55LED	24 watt LED module 38 watt LED module 55 watt LED module	
COLOR (K)	<input type="checkbox"/> 3K <input type="checkbox"/> 4K	3000K 4000K	
TOP STYLE	<input type="checkbox"/> D <input type="checkbox"/> N	Dome None (flush top)	
LENS	<input type="checkbox"/> CA <input type="checkbox"/> GL <input type="checkbox"/> OA <input type="checkbox"/> OP	Clear Acrylic Glass Lens Opal Acrylic Opal Polycarbonate	
SHADE	<input type="checkbox"/> NS <input type="checkbox"/> SHD <input type="checkbox"/> SHDCO <input type="checkbox"/> SHDFLT <input type="checkbox"/> SHDSS	No Shade Spun Aluminum Angled Shade Spun Copper Angled Shade Stamped Aluminum Flat Shade Spun Stainless Steel Angled Shade	
OPTIONS	<input type="checkbox"/> NL <input type="checkbox"/> NR <input type="checkbox"/> TRH <input type="checkbox"/> 180HSS	No Internal Louvers No External Rings Tamper Resistant Hardware 180 Degree House Side Shield	
VOLTAGE	<input type="checkbox"/> UNV	Universal Voltage (120v-277v) (50/60Hz) <i>electronic constant current driver; 0-10V dimmable; dims down to 0.1%</i>	
FINISH	<input type="checkbox"/> BLK <input type="checkbox"/> BRZ <input type="checkbox"/> GRY <input type="checkbox"/> SIL	Black Bronze Grey Silver	<input type="checkbox"/> VGN Verde Green <input type="checkbox"/> WHT White <input type="checkbox"/> CC Custom Color – consult factory



www.intrigueled.com

N60 W14592 Kaul Avenue Menomonee Falls, WI 53051
P: (877) 965 0005 F: (262) 436 1745

IES files can be found on website.

Content of specification sheets is subject to change. Please consult website for current product detail.