

Type: \_\_\_\_\_ Model: \_\_\_\_\_

Project: \_\_\_\_\_





# MYSTIQUE FULL CUTOFF

## Full Cutoff LED Wall Mount



Straight Arm Wall Mount (WA) shown

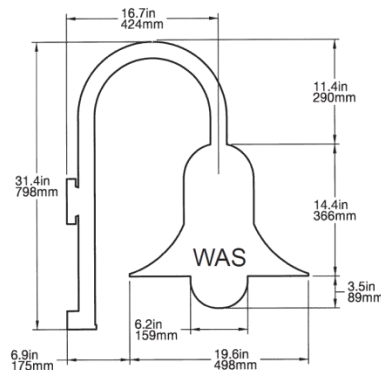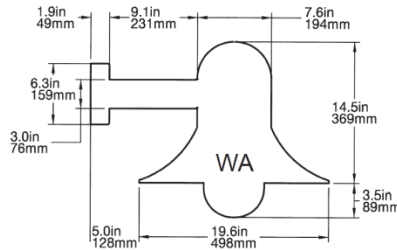

**General:** The contemporary design and swept shade of the Mystique series provides a full-cutoff decorative fixture. Fixture was designed to meet IESNA standards for full-cutoff, reducing upward light pollution.

**Construction:** Dome top, housing, and mounting gear are constructed of low copper content cast aluminum. Shade shall be spun aluminum. Stainless steel external hardware to protect against the exterior elements.

**Lens:** 3mm thick flat clear glass lens integrated within LED module.

**LED Light Engine:** LED module located in upper housing with LED module offering 20 nominal input watts. Available in color temperatures of 3000K and 4000K. Minimum CRI = 70.

**Driver:** Constant current LED driver operating at 1050mA; universal input voltage of 120v to 277v, internally mounted.

**Heat Sink:** Finned heat sink shall be extruded aluminum with an electrocoating and shall be encapsulated on top of LED module.

**Mounting:** Mounting shall be straight wall arm (-WA) and wall arm shepherd's crook (-WAS).

**Finish:** Textured polyester powder coat finish. Shade underside is standard white finish. Black, bronze, grey, white, silver, and verde green options available. For woodgrain finish and custom colors, consult factory.

**Gaskets:** EPDM gaskets standard.

<b>EPA and Weight:</b>	EPA	WA	0.75ft <sup>2</sup>
		WAS	0.86ft <sup>2</sup>

<b>Weight</b>	WA	26 lbs
	WAS	28 lbs

**Listings:** ETL Listed to UL 8750. IESNA LM79



Type: \_\_\_\_\_ Model: \_\_\_\_\_

Project: \_\_\_\_\_



SERIES MOUNTING WATTAGE CCT (kelvin) TOP STYLE VOLTAGE FINISH

MYF - \_\_\_\_\_ - 20LED - \_\_\_\_\_ - D - UNV - \_\_\_\_\_

## FIXTURE DETAIL

**SERIES**  MYF Mystique Full Cutoff Wall Mount

**MOUNTING**  WA Straight Arm Wall Mount  
 WAS Wall Arm Shepherds Crook Mount

**WATTAGE**  20LED 20 input watts

Input Watts	Drive Current (mA)	Color Temperature	Optics	Lumens	LPW	CRI
20w	1050mA	3000K	Lens	2,006	105	70
		4000K		2,197	115	70

**COLOR (kelvin)**  3K 3000K  
 4K 4000K

**TOP STYLE**  D Dome

**VOLTAGE**  UNV 120v – 277v; output current 1050mA

**FINISH**  BLK Black finish  VGN Verde Green finish  
 BRZ Bronze finish  WHT White finish  
 GRY Grey finish  CC Custom Color – consult factory  
 SIL Silver finish

IES files can be found on website.

Content of specification sheets is subject to change. Please consult website for current product detail.

