

Type: _____ Model: _____

Project: _____



MYSTIQUE FULL CUTOFF

Full Cutoff Amber LED Wall Mount




Straight Arm Wall Mount (WA) shown



Dome Top

Cone Top

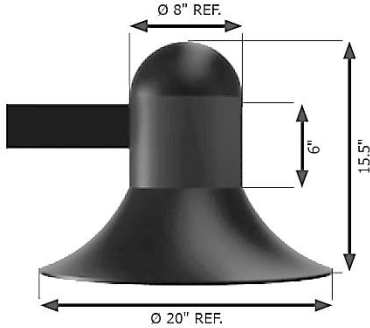

General: The contemporary design and swept shade of the Mystique series provides a full-cutoff decorative fixture. Fixture was designed to meet IESNA standards for full-cutoff, reducing upward light pollution.

Construction: Top, housing, and mounting gear are constructed of low copper content cast aluminum. Shade shall be spun aluminum. Stainless steel external hardware to protect against the exterior elements.

Lens: Glass globe available in opal (-OL) or clear (-CL).

Tops: Two (2) top style options available: Cone (-C) and Dome (-D) top. Cone (-C) top not available for use with wall arm shepherds crook (-WAS) mount.

LED Light Engine: LED module located in upper housing with LED module offering 33 nominal input watts. Amber LED board providing color wavelength of 590nm.

Driver: Constant current LED driver mounted in upper fixture housing; drive current of 700mA.

Heat Sink: Finned heat sink shall be extruded aluminum and shall be located in housing above LED module.

Mounting: Mounting shall be straight wall arm (-WA) and wall arm shepherds crook (-WAS).

Finish: Textured polyester powder coat finish. Shade underside is standard white finish. Black, bronze, grey, white, silver, and verde green options available. For woodgrain finish and custom colors, consult factory.

Gaskets: EPDM gaskets standard.

EPA and Weight:

EPA	WA	0.75ft ²
	WAS	0.86ft ²

Weight	WA	26 lbs
	WAS	28 lbs



Listings: ETL Listed to UL 8750. IESNA LM79



Type: _____ Model: _____

Project: _____



SERIES MOUNTING WATTAGE LED COLOR TOP STYLE LENS VOLTAGE FINISH

FIXTURE DETAIL

SERIES **MYF** Mystique Full Cutoff Wall Mount

MOUNTING **WA** Straight Arm Wall Mount
 WAS Wall Arm Shepherds Crook Mount

WATTAGE **33LED** 33 nominal watts

Nominal Watts	Nominal Lumens	Lumens/Watt (LPW)	Wavelength	Rated Life (L85)	Drive Current (mA)	Output Voltage
33	2,000	61	590nm	50,000 hrs	700mA	48V

LED COLOR **AML** Amber LED board | wavelength of 590nm

TOP STYLE **C** Cone
 D Dome

LENS **CL** Clear Glass Globe
 OL Opal/Translucent Glass Globe

VOLTAGE **UNV** 120v – 277v; output current 700mA

FINISH **BLK** Black finish **VGN** Verde Green finish
 BRZ Bronze finish **WHT** White finish
 GRY Grey finish **CC** Custom Color – consult factory
 SIL Silver finish **WGF** Woodgrain finish – consult factory

IES files can be found on website.

Content of specification sheets is subject to change. Please consult website for current product detail.



www.intrigueled.com

N60 W14592 Kaul Avenue Menomonee Falls, WI 53051
P: (877) 965 0005 F: (262) 436 1745