

Type: _____ Model: _____

Project: _____






MYSTIQUE FULL CUTOFF

IESNA Full Cutoff LED Post Top



shown with straight post arm mount (-PA)

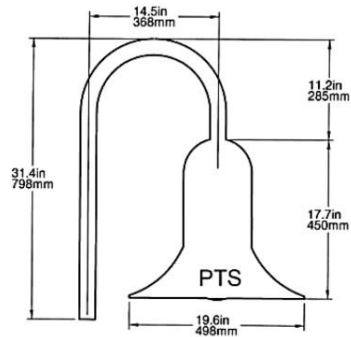

General: The contemporary design and swept shade of the Mystique series provides a full-cutoff decorative fixture. Fixture was designed to meet IESNA standards for full-cutoff, reducing upward light pollution.

Construction: Dome top, housing, and mounting gear are constructed of low copper content cast aluminum. Shade shall be spun aluminum. Stainless steel external hardware to protect against the exterior elements.

Lens: 3mm thick flat clear glass lens integrated within LED module.

LED Light Engine: LED module located in upper housing with LED module offering 20 nominal input watts. Available in color temperatures of 3000K and 4000K. Minimum CRI = 70.

Driver: Constant current LED driver operating at 1050mA; universal input voltage of 120v to 277v, internally mounted.

Heat Sink: Finned heat sink shall be extruded aluminum with an electrocoating and shall be encapsulated on top of LED module.

Mounting: Three (3) pole mount styles available: straight pole arm (-PA), post top shepherds crook (-PTS), and side arm shepherds crook (-PAS).

Pole: See Intrigue "Pole Specification Guide" for product detail.

Finish: Textured polyester powder coat finish. Shade underside is standard white finish. Black, bronze, grey, white, silver, and verde green options available. For custom colors, consult factory.

Gaskets: EPDM gaskets standard.

EPA and Weight:	EPA	PA	0.75ft ²
		PTS	0.85ft ²
		PAS	0.86ft ²
Weight	PA	26 lbs	
	PTS	27 lbs	
	PAS	28 lbs	



Listings: ETL Listed to UL 8750. IESNA LM79



www.intrigueled.com

N60 W14592 Kaul Avenue Menomonee Falls, WI 53051

P: (877) 965 0005

F: (262) 436 1745

Type: _____ Model: _____

Project: _____



SERIES MOUNTING WATTAGE CCT (kelvin) TOP STYLE VOLTAGE FINISH

MYF - - 20LED - - D - UNV -

FIXTURE DETAIL

SERIES

- ☐ **MYF** Mystique Full Cutoff Pole Mount

MOUNTING

- ☐ **PA** Straight Arm Pole Mount
☐ **PAS** Side Arm Shepherds Crook Mount
☐ **PTS** Post Top Shepherds Crook Mount

WATTAGE

- ☐ **20LED** 20 input watts

Input Watts	Drive Current (mA)	Color Temperature	Optics	Lumens	LPW	CRI
20w	1050mA	3000K	Lens	2,006	105	70
		4000K		2,197	115	70

COLOR (kelvin)

- ☐ **3K** 3000K
☐ **4K** 4000K

TOP STYLE

- ☐ **D** Dome

VOLTAGE

- ☐ **UNV** 120v – 277v; output current 1050mA

FINISH

- | | |
|---|---|
| <input type="checkbox"/> BLK Black finish | <input type="checkbox"/> VGN Verde Green finish |
| <input type="checkbox"/> BRZ Bronze finish | <input type="checkbox"/> WHT White finish |
| <input type="checkbox"/> GRY Grey finish | <input type="checkbox"/> CC Custom Color – consult factory |
| <input type="checkbox"/> SIL Silver finish | |

IES files can be found on website.

Content of specification sheets is subject to change. Please consult website for current product detail.



www.intrigueled.com

N60 W14592 Kaul Avenue Menomonee Falls, WI 53051
P: (877) 965 0005 F: (262) 436 1745