

# ONCURVE-CONCAVE

LED - Architectural Recessed Troffer with Concave lens

VISIONEERING<sup>™</sup> | a **LEVITON** brand

Project:	Catalogue #:	Type:
Notes:		

## Product Description

Premium-grade, recessed, lay-in T-Bar troffer with modern styling and high visual comfort featuring a single concave lens. For use with indoor applications where high efficiency, high performance and ease of installation are required.

## Applications

Office Areas, Retail Stores, Classrooms, Hospitals, Nursing Homes, Hospitality

## Features

- 1x4, 2x2, 2x4 and 20x60 configurations
- Standard low voltage dimming (0-10v, 1%)
- For use in insulated ceilings

## Featured Options

- Emergency lighting battery pack
- Intellect occupancy/daylight sensor

## Optical System

Frosted curved single-piece diffuser.

## Mounting

This luminaire has been specifically designed for T-Bar applications. Integral earthquake clips.

## Construction

Die-formed, cold rolled heavy-gauge steel housing assembly. Wiring access plates and knockouts are provided on back of housing.

## Finish

White, polyester powder painted housing

## Electrical

Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance > 50,000 hours. Standard low voltage dimming (0-10v) driver.

## Warranty


5 year limited warranty. For complete warranty, click here:




## Approvals

- ETL listed.
- Suitable for damp locations.
- DesignLights Consortium®

All configurations may not be DLC qualified. Check [www.designlights.org/QPL](http://www.designlights.org/QPL) for qualified configurations.

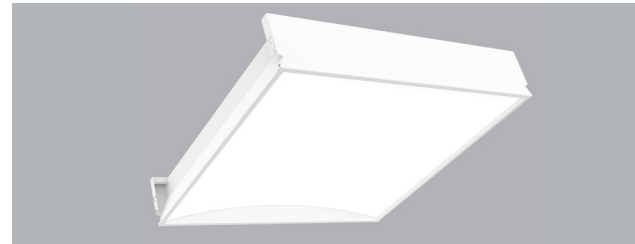

## Dimensions

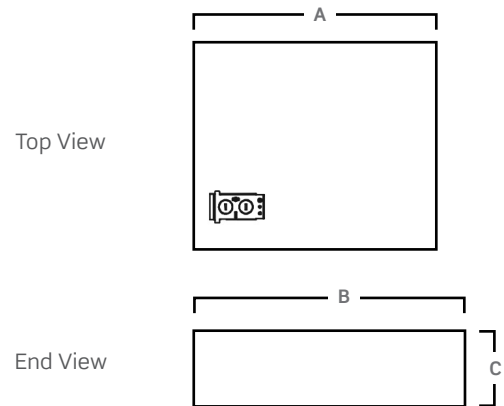

Size	A	B	C
1x4	47.75"	11.75"	4.5"
2x2	23.75"	23.75"	4.5"
2x4	47.75"	23.75"	4.5"
20x60	59.75"	19.75"	4.5"

Consult installation guide for exact dimensions.

Project:

Catalogue #:

Type:

Notes:

Order Key

EXAMPLE: OCRV2x2-LED840K040LUNV

OCR

V

-

LED

8

-

Type

Concave Lens

Size (Width x Length)

1x4

2x2

2x4

20x60\*

CRI

8 - (80+)

CCT

30K - 3000K\*\*

35K - 3500K

40K - 4000K

50K - 5000K\*\*

Voltage

UNV - 120-277V

347 - 347V

Nominal Lumens

1x4

020L - 2000

030L - 3000

040L - 4000

2x2

024L - 2400

034L - 3400

040L - 4000

050L - 5000

2x4

036L - 3600

050L - 5000

060L - 6000

070L - 7000

Custom Lumens

LC\*\*\*

Options

Driver Options

B02

Dimming Addressable Digital (DALI)

(Not available for 347V)

B39

Emergency Lighting Battery Pack - LED

Air Handling Options

A1

Air Supply/Return Slots

(Consult factory for 1x4)

Housing Construction Options

C45

Housing for regular tiles

C32

Chicago Plenum

C79

Full Length LEDs (for 20x60)

Packaging Options

K0

Bulk Pack/Pallet Packed and/or Wrapped

Wiring Options

V09

Flexible Whip (standard 6Ft. x 3-18 ga.)

Controls Options

For advanced wireless controls [Click Here.](#)

\*Includes filler plates. Consult factory for configuration details.

\*Includes filler plates. Consult factory for configuration details.  
\*\* Consult factory for availability

Other options may be available, consult factory. Specifications and data subject to change without notice.

Performance Data

LED Performance Data

Size	Nominal Lumens	Delivered Lumens	Watts	Lumens Per Watt
1x4	2000	1974	17	120
	3000	3116	26	120
	4000	4062	36	113
2x2	2400	2445	19	129
	3400	3406	28	120
	4000	4181	35	118
	5000	5073	42	122
2x4 20x60	3600	3601	27	135
	5000	4879	37	132
	6100	6000	47	130
	7000	7016	54	129

Values based on 840K with standard lens at 25C

\*Custom Lumens

Size	Nominal Lumens Range	Watts
1x4	2000 - 4000	17 - 36
2x2	2400 - 5000	20 - 45
2x4	3600 - 7000	28 - 55

\*3000Lm Example:  
OCRV2x2-LED840K030LCUNV

Flange Kits (Ordered Separately)

Size (Width x Length)	Item No.
1x4	KIT00136
2x2	KIT00137
2x4	KIT00138

Surface Kits (Ordered Separately)

Size (Width x Length)	Item No.
1x4	KIT00373
2x2	KIT00374
2x4	KIT00375

Performance Scaling Factor

	50K	40K	35K	30K
80CRI	1.000	1.000	0.960	0.946
90CRI	0.875	0.875	0.836	0.809

Lifetime Expectancy

	Calculated Hours	Reported Hours
L70	≥ 210,000	> 72,000
L80	≥ 125,000	> 72,000
L90	≥ 56,000	> 56,000