



PRIME

PRIME 6" LED ARCHITECTURAL ROUND FLANGED WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

USE OF PRODUCT

The 6" Prime Wall Wash Series Downlight is the ideal product for energy efficient lighting in commercial and residential applications where wall washing is required. Available in an assortment of color temperatures, optics, lumen outputs, and dimmable driver options.

PRIME FEATURES

Color Temperature: 2700K, 3000K, 3500K, or 4000K
SDCM: 2 step binning
Color Rendering Index: 93+ CRI
Optical Lens: 18°, 30°, 50°, 80°
Trim: Die cast or anodized
LED Life: 50,000 Hours
LED Type: Cree LED
Driver Info: 120-277V, 50/60 Hz, PF>0.9, THD<0.20
Warranty: 5 year limited warranty

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

ADJUSTMENT

- Light engine locked at 25° tilt, consult factory for other tilt setting.
- Housing provides for 360° locking rotation
- Aperture collar adjusts 15°± horizontally within frame for square ceiling alignment
- Collar notch allows for easy alignment for square applications.
- Aperture collar compatible up to 1½" ceiling thickness.
- Accommodation for 2" or 3" ceiling thickness available upon request.

OPTICS

Field replaceable optical lens available in 18°, 30°, 50°, and 80°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Lutron Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

TRIM OPTIONS

- All trims are self flanged die cast or anodized.
- Trim includes standard frosted acrylic diffuser.
- 12% lumens increase if remove standard frosted acrylic diffuser in field.
- Optical Enhancer reflects light evenly across the diffusion lens.
- Trims available in round or square in an assortment of standard or made to order finishes.

LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- Energy Star
- Title 24, JA8 Compliant
- 5 Year limited warranty



HOUSING ORDERING INFORMATION

RPA6						
Series	Lumens	Color Temp	Voltage	Dimming	Optical Lens ⁹	Filter
PRIME	8L ¹ - 835 lm	27 - 2700K	UNV - 120-277V	ID ³ - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	18 - 18°	None - Leave blank
SERIES	9L ¹ - 940 lm	30 - 3000K	120 - 120V	PEQ0 ⁴ - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming	30 - 30°	F - Frosted filter
	12L ¹ - 1270 lm	35 - 3500K	347 ² - 347V	LDE1 ⁵ - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming	50 - 50°	H - Honeycomb
	16L ¹ - 1685 lm	40 - 4000K		LTE ^{5,6} - Lutron Hi-Lume 1% 2-wire	80 - 80°	S - Solite filter
	19L ¹ - 1975 lm			L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver		
	24L ¹ - 2460 lm			EEI ^{7,8} - eldoLED Eco 1% Dim (0-10V)		
	27L ¹ - 2795 lm			EDIO ^{7,8} - eldoLED Solo 0.1% Dim (0-10V)		
	30L - 3025 lm			EDID ^{7,8} - eldoLED Solo 0.1% Dim (DALI)		

Housing Type	Aperture	Frame Accessories	Collar	Option
NC - Non-IC New Construction IC ¹⁰ - IC Air-tight New Construction	RFW - Round Flanged Wall Wash	C - C Channel bar hanger B - Flat bar hanger WJ - Wood Joist	Blank - 1.5" Depth 20 - 2" Depth 30 - 3" Depth MTO - Made to order	EI8 - Emergency battery with integral switch(800 Lumens) ER8 - Emergency battery with remote switch (800 Lumens) EI17 - Emergency battery with integral switch(1700 Lumens) ER17 - Emergency battery with remote switch (1700 Lumens) FCJS-E - Vive wireless individual controller(Ecosystem) FCJS-0 - Vive wireless individual controller(0-10) CP ¹⁰ - Chicago Plenum

TRIM ORDERING INFORMATION

6RFA		
Aperture Size / Shape / Trim Type / Style	Bevel / Flange Finish	Options
6RFA - 6" Round Flange Accent	W-W - White bevel / white flange H-W - Haze bevel / white flange B-B - Black bevel / black flange H-H - Haze bevel / Haze flange S-S - Specular clear bevel / Specular clear flange S-W - Specular clear bevel / white flange WE-WE - Wheat bevel / wheat flange MTO - Made to order	WL - Wet location

1. Compatible with IC new construction housing.
2. Step down transformer required.
3. Intelligent Drive is the standard driver.
4. Driver must not exceed 1270 lm
5. 120V only.
6. Inapplicable to 3025 Lumen offering.
7. Must specify logarithmic or linear eldoLED diver.
8. Confirm dimming curve: linear or logarithmic.
9. Without standard frosted acrylic diffuser.
10. Compatible up to 1685 lumens.

PRIME

PRIME 6" LED ARCHITECTURAL
ROUND FLANGED WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

6" PRIME WALL WASH



LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
11W	835 Lm	120-277V	93+
16W	940 Lm	120-277V	93+
20W	1270 Lm	120-277V	93+
30W	1685 Lm	120-277V	93+
31W	1975 Lm	120-277V	93+
38W	2460 Lm	120-277V	93+
45W	2795 Lm	120-277V	93+
58W	3025 Lm	120-277V	93+

*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
**Lumens will vary based on CCT, optical lens, and bevel finish.


DIMENSION

Trim Details

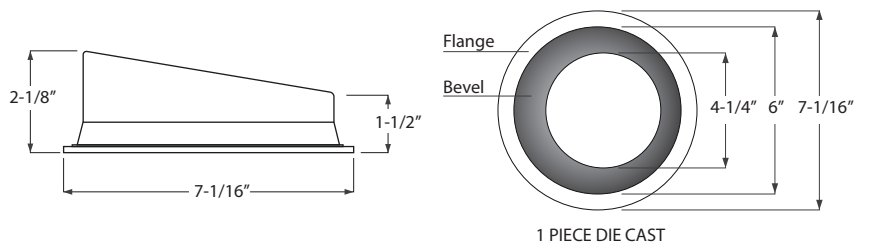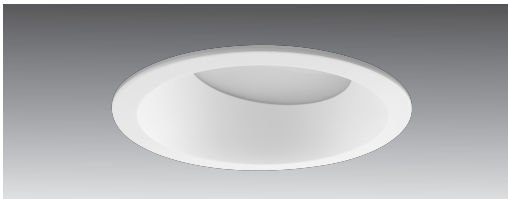

LED HOLDER & FILTER DIMENSION

LED Holder and Filter

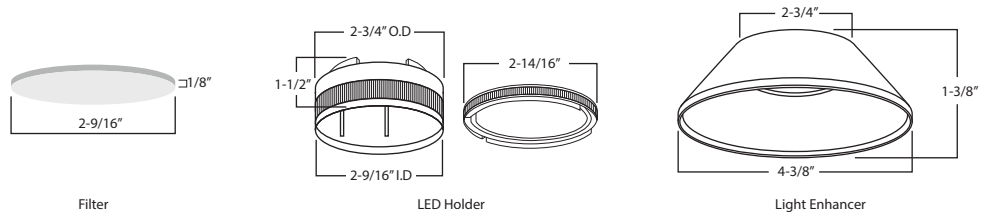

PRIME



PRIME 6" LED ARCHITECTURAL
ROUND FLANGED WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:




6" PRIME WALL WASH

HOUSING DIMENSION

IC Housing Details

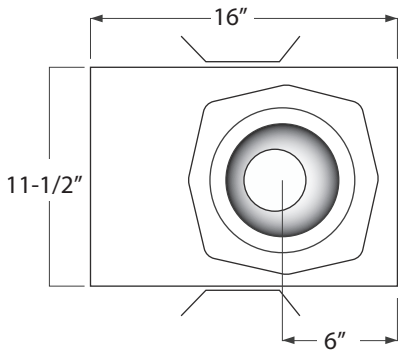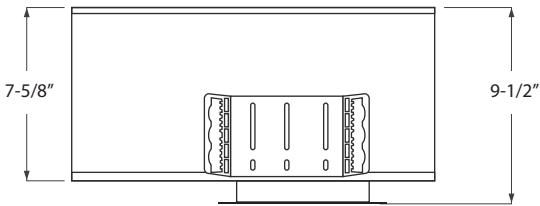


Non-IC Housing Details

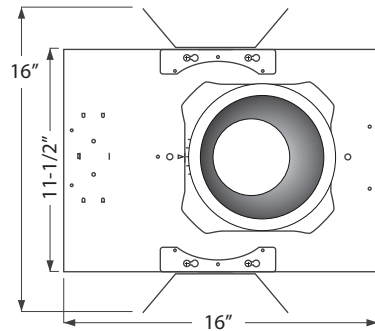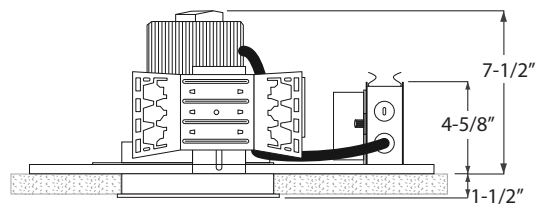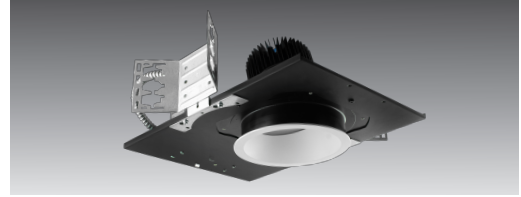

Ceiling Cut-out: 6-3/8"
Maximum Ceiling Thickness: 1-1/2"
Minimum Ceiling Thickness: 1/2"
Consult factory for custom ceiling thickness

COLLAR DEPTH PER CEILING THICKNESS

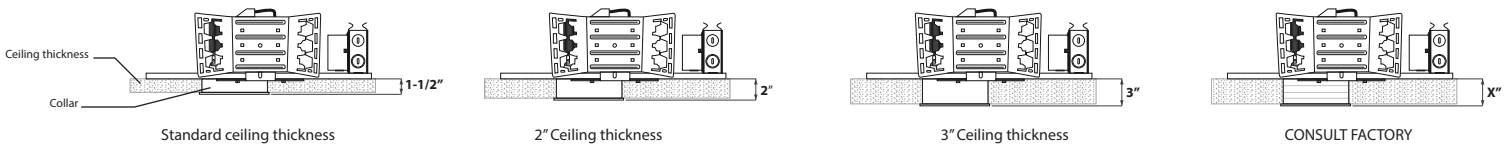

PRIME

PRIME 6" LED ARCHITECTURAL
ROUND FLANGED WALL WASH

WJ

Slotted Holes allow for an easier installation

Wood Joist

4" up to 8" CKOs

Fits up to 26" stud spacings

Plate is offset, allowing for adjustability with irregular stud spacing

B

Flat Bar Hanger

27"

1/2"

C

C Channel Bar Hanger

25-3/16"

1-6/16"

PRIME

PRIME 6" LED ARCHITECTURAL
ROUND FLANGED WALL WASH

6" PRIME WALL WASH

AT-A-GLANCE TECHNICAL INFORMATION

RPA - 8L 18° BEAM

TEST DATE 2020-07-27
SERIES RPA6-8L-30K-18°-RFD
LUMENS 775 LM
WATTS 11.86 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	274.3	35.4%	35.5%
0-40	564.3	72.8%	73%
0-60	737.8	95.2%	95.4%
60-90	35.6	4.6%	4.6%
0-90	773.3	99.8%	100%

Zone Lumen Summary

RPA - 8L 30° BEAM

TEST DATE 2020-07-27
SERIES RPA6-8L-30K-30°-RFD
LUMENS 834.6 LM
WATTS 11.86 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	305.5	36.6%	36.6%
0-40	596.7	71.5%	71.6%
0-60	796.9	95.5%	95.5%
60-90	36.8	4.4%	4.4%
0-90	833.6	99.9%	100%

Zone Lumen Summary

RPA - 8L 60° BEAM

TEST DATE 2020-07-27
SERIES RPA6-8L-30K-60°-RFD
LUMENS 722.5 LM
WATTS 11.86 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	309.5	42.8%	42.6%
0-40	521.9	72.2%	72.3%
0-60	687.7	95.2%	95.3%
60-90	34.2	4.7%	4.7%
0-90	721.9	99%	100%

Zone Lumen Summary

RPA - 8L 80° BEAM

TEST DATE 2020-07-27
SERIES RPA6-8L-30K-80°-RFD
LUMENS 628.2 LM
WATTS 11.86 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	291.9	46.5%	46.5%
0-40	459.1	73.1%	73.1%
0-60	596.6	95%	95%
60-90	31.7	5%	5%
0-90	628.3	100%	100%

Zone Lumen Summary

RPA - 9L 18° BEAM

TEST DATE 2020-07-27
SERIES RPA6-9L-30K-18°-RFD
LUMENS 840 LM
WATTS 16.00 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	346.0	41.2%	41.2%
0-40	539.2	64.2%	64.2%
0-60	781.5	93%	93.1%
60-90	58.1	6.9%	6.9%
0-90	839.6	100%	100%

Zone Lumen Summary

RPA - 9L 30° BEAM

TEST DATE 2020-07-27
SERIES RPA6-9L-30K-30°-RFD
LUMENS 939.1 LM
WATTS 16.00 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	372.8	39.7%	39.7%
0-40	590.8	62.9%	62.9%
0-60	873.7	93%	93.1%
60-90	65.0	6.9%	6.9%
0-90	938.6	100%	100%

Zone Lumen Summary

RPA - 9L 60° BEAM

TEST DATE 2020-07-27
SERIES RPA6-9L-30K-60°-RFD
LUMENS 780 LM
WATTS 16.00 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	309.7	39.7%	39.7%
0-40	488.3	62.6%	62.6%
0-60	724.1	92.8%	92.9%
60-90	55.6	7.1%	7.1%
0-90	779.6	100%	100%

Zone Lumen Summary

RPA - 9L 80° BEAM

TEST DATE 2020-07-27
SERIES RPA6-9L-30K-80°-RFD
LUMENS 688.4 LM
WATTS 16.02 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	281.0	40.8%	40.8%
0-40	436.9	63.5%	63.5%
0-60	639.0	92.8%	92.9%
60-90	49.2	7.1%	7.1%
0-90	688.1	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

PRIME

PRIME 6" LED ARCHITECTURAL
ROUND FLANGED WALL WASH

6" PRIME WALL WASH

AT-A-GLANCE TECHNICAL INFORMATION

RPA - 12L 18° BEAM

TEST DATE 2020-07-27
SERIES RPA6-12L-30K-18°-RFD
LUMENS 1196.6 LM
WATTS 20.48 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	420.5	35.1%	35.2%
0-40	864.8	72.3%	72.4%
0-60	1,137.7	95.1%	95.3%
60-90	56.4	4.7%	4.7%
0-90	1,194.1	99.8%	100%

Zone Lumen Summary

RPA - 12L 30° BEAM

TEST DATE 2020-07-27
SERIES RPA6-12L-30K-30°-RFD
LUMENS 1268.6 LM
WATTS 20.49 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	446.3	35.2%	35.2%
0-40	891.7	70.3%	70.4%
0-60	1,208.1	95.2%	95.3%
60-90	59.2	4.7%	4.7%
0-90	1,267.3	99.9%	100%

Zone Lumen Summary

RPA - 12L 60° BEAM

TEST DATE 2020-07-27
SERIES RPA6-12L-30K-60°-RFD
LUMENS 1145.7 LM
WATTS 20.48 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	486.8	42.5%	42.5%
0-40	822.8	71.8%	71.9%
0-60	1,090.8	95.2%	95.3%
60-90	54.0	4.7%	4.7%
0-90	1,144.8	99%	100%

Zone Lumen Summary

RPA - 12L 80° BEAM

TEST DATE 2020-07-27
SERIES RPA6-12L-30K-80°-RFD
LUMENS 997.1 LM
WATTS 20.51 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	459.8	46.1%	46.1%
0-40	724.9	72.7%	72.7%
0-60	947.0	95%	94.9%
60-90	50.8	5.1%	5.1%
0-90	997.8	100.1%	100%

Zone Lumen Summary

RPA - 16L 18° BEAM

TEST DATE 2020-07-27
SERIES RPA6-16L-30K-18°-RFD
LUMENS 1585.7 LM
WATTS 29.60 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	565.8	35.7%	35.7%
0-40	1,157.8	73%	73.1%
0-60	1,509.3	95.2%	95.3%
60-90	73.8	4.7%	4.7%
0-90	1,583.1	99.8%	100%

Zone Lumen Summary

RPA - 16L 30° BEAM

TEST DATE 2020-07-27
SERIES RPA6-16L-30K-30°-RFD
LUMENS 1685 LM
WATTS 29.60 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	610.0	36.2%	36.2%
0-40	1,197.0	71%	71.1%
0-60	1,606.3	95.3%	95.4%
60-90	77.1	4.6%	4.6%
0-90	1,683.4	99.9%	100%

Zone Lumen Summary

RPA - 16L 60° BEAM

TEST DATE 2020-07-27
SERIES RPA6-16L-30K-60°-RFD
LUMENS 1472.1 LM
WATTS 29.60 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	609.9	41.4%	41.5%
0-40	1,039.6	70.6%	70.7%
0-60	1,398.1	95%	95.1%
60-90	71.9	4.9%	4.9%
0-90	1,470.0	100%	100%

Zone Lumen Summary

RPA - 16L 80° BEAM

TEST DATE 2020-07-27
SERIES RPA6-16L-30K-80°-RFD
LUMENS 1296.1 LM
WATTS 29.60 W
CCT 3000K

Zone	Lumens	%Lamp	%Luminaire
0-30	589.1	45.5%	45.5%
0-40	933.7	72%	72.1%
0-60	1,229.3	94.8%	94.9%
60-90	66.2	5.1%	5.1%
0-90	1,295.5	100%	100%

Zone Lumen Summary

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

PRIME


PRIME 6" LED ARCHITECTURAL
ROUND FLANGED WALL WASH

6" PRIME WALL WASH

AT-A-GLANCE TECHNICAL INFORMATION

RPA - 19L 18° BEAM


TEST DATE	2020-07-27
SERIES	RPA6-19L-30K-18°-RFW
LUMENS	1843.2 LM
WATTS	28.14 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	681.3	37%	37%
0-40	1,326.8	72%	72.1%
0-60	1,756.5	95.3%	95.4%
60-90	84.6	4.6%	4.6%
0-90	1,841.1	99.9%	100%

RPA - 19L 30° BEAM


TEST DATE	2020-07-27
SERIES	RPA6-19L-30K-30°-RFW
LUMENS	1973.3 LM
WATTS	28.18 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	741.9	37.6%	37.6%
0-40	1,412.7	71.6%	71.7%
0-60	1,882.7	95.4%	95.5%
60-90	88.5	4.5%	4.5%
0-90	1,971.2	99.9%	100%

RPA - 19L 60° BEAM


TEST DATE	2020-07-27
SERIES	RPA6-19L-30K-60°-RFW
LUMENS	1729.6 LM
WATTS	28.16 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	741.9	42.9%	42.9%
0-40	1,243.9	71.9%	72%
0-60	1,644.7	95.1%	95.2%
60-90	83.2	4.8%	4.8%
0-90	1,727.9	99.9%	100%

RPA - 19L 80° BEAM


TEST DATE	2020-07-27
SERIES	RPA6-19L-30K-80°-RFW
LUMENS	1542.4 LM
WATTS	28.15 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	701.9	45.5%	45.5%
0-40	1,111.0	72%	72.1%
0-60	1,462.4	94.8%	94.9%
60-90	79.2	5.1%	5.1%
0-90	1,541.6	99.9%	100%

RPA - 24L 18° BEAM


TEST DATE	2020-07-27
SERIES	RPA6-24L-30K-18°-RFW
LUMENS	2316.6 LM
WATTS	37.40 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	843.1	36.4%	36.4%
0-40	1,671.9	72.2%	72.2%
0-60	2,209.3	95.4%	95.5%
60-90	105.3	4.5%	4.5%
0-90	2,314.6	99.9%	100%

RPA - 24L 30° BEAM


TEST DATE	2020-07-27
SERIES	RPA6-24L-30K-30°-RFW
LUMENS	2461.7 LM
WATTS	37.39 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	916.3	37.2%	37.3%
0-40	1,752.4	71.2%	71.3%
0-60	2,347.6	95.4%	95.5%
60-90	109.7	4.5%	4.5%
0-90	2,457.4	99.8%	100%

RPA - 24L 60° BEAM


TEST DATE	2020-07-27
SERIES	RPA6-24L-30K-60°-RFW
LUMENS	2162.8 LM
WATTS	37.35 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	924.8	42.8%	42.8%
0-40	1,548.0	71.6%	71.6%
0-60	2,057.0	95.1%	95.2%
60-90	103.7	4.8%	4.8%
0-90	2,160.8	99.9%	100%

RPA - 24L 80° BEAM

TEST DATE	2020-07-27
SERIES	RPA6-24L-30K-80°-RFW
LUMENS	1916 LM
WATTS	37.34 W
CCT	3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	873.6	45.6%	45.6%
0-40	1,379.6	72%	72%
0-60	1,816.5	94.8%	94.9%
60-90	98.6	5.1%	5.1%
0-90	1,915.1	100%	100%

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

PRIME


PRIME 6" LED ARCHITECTURAL
ROUND FLANGED WALL WASH

6" PRIME WALL WASH

AT-A-GLANCE TECHNICAL INFORMATION

RPA - 27L 18° BEAM


TEST DATE 2020-07-27
SERIES RPA6-27L-30K-18°-RFW
LUMENS 2578.6 LM
WATTS 44.19 W
CCT 3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	969.6	37.6%	37.6%
0-40	1,894.8	73.5%	73.5%
0-60	2,459.0	95.4%	95.4%
60-90	117.5	4.6%	4.6%
0-90	2,576.5	99.9%	100%

RPA - 27L 30° BEAM


TEST DATE 2020-07-27
SERIES RPA6-27L-30K-30°-RFW
LUMENS 2796.7 LM
WATTS 44.15 W
CCT 3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	1,058.1	37.8%	37.9%
0-40	2,004.1	71.7%	71.8%
0-60	2,672.1	95.5%	95.7%
60-90	120.3	4.3%	4.3%
0-90	2,792.4	99.8%	100%

RPA - 27L 60° BEAM


TEST DATE 2020-07-27
SERIES RPA6-27L-30K-60°-RFW
LUMENS 2427.5 LM
WATTS 44.16 W
CCT 3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	1,041.1	42.9%	42.9%
0-40	1,743.0	71.8%	71.9%
0-60	2,308.1	95.1%	95.2%
60-90	117.1	4.8%	4.8%
0-90	2,425.3	99.9%	100%

RPA - 27L 80° BEAM


TEST DATE 2020-07-27
SERIES RPA6-27L-30K-80°-RFW
LUMENS 2147.2 LM
WATTS 44.17 W
CCT 3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	987.5	46%	46%
0-40	1,554.2	72.4%	72.4%
0-60	2,036.8	94.9%	94.9%
60-90	109.3	5.1%	5.1%
0-90	2,146.0	99.9%	100%

RPA - 30L 18° BEAM


TEST DATE 2020-07-27
SERIES RPA6-30L-30K-18°-RFW
LUMENS 2833.7 LM
WATTS 57.52 W
CCT 3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	1,120.4	39.5%	39.6%
0-40	2,055.7	72.5%	72.6%
0-60	2,699.1	95.2%	95.3%
60-90	132.1	4.7%	4.7%
0-90	2,831.2	99.9%	100%

RPA - 30L 30° BEAM


TEST DATE 2020-07-27
SERIES RPA6-30L-30K-30°-RFW
LUMENS 3024.3 LM
WATTS 57.47 W
CCT 3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	1,197.7	39.6%	39.6%
0-40	2,155.4	71.3%	71.3%
0-60	2,882.2	95.3%	95.4%
60-90	139.7	4.6%	4.6%
0-90	3,021.9	99.9%	100%

RPA - 30L 60° BEAM


TEST DATE 2020-07-27
SERIES RPA6-30L-30K-60°-RFW
LUMENS 2726.7 LM
WATTS 57.62 W
CCT 3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	1,192.6	43.7%	43.8%
0-40	1,968.2	72.2%	72.3%
0-60	2,589.6	95%	95.1%
60-90	133.3	4.9%	4.9%
0-90	2,722.9	99.9%	100%

RPA - 30L 80° BEAM

TEST DATE 2020-07-27
SERIES RPA6-30L-30K-80°-RFW
LUMENS 2516.2 LM
WATTS 57.61 W
CCT 3000K



Zone	Lumens	%Lamp	%Luminaire
0-30	1,148.7	45.7%	45.7%
0-40	1,820.8	72.4%	72.4%
0-60	2,385.6	94.8%	94.9%
60-90	128.8	5.1%	5.1%
0-90	2,514.4	99.9%	100%

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)