



PRIME

PRIME 4" LED ARCHITECTURAL SQUARE FLANGELESS WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

USE OF PRODUCT

The 4" Prime Wall Wash Series Downlight is the ideal product for energy efficient lighting in commercial and residential applications where wall washing is required. Available in an assortment of color temperatures, optics, lumen outputs, and dimmable driver options.

PRIME FEATURES

Color Temperature: 2700K, 3000K, 3500K, or 4000K
 SDCM: 2 step binning
 Color Rendering Index: 93+ CRI
 Optical Lens: 18°, 30°, 50°, 80°
 Trim: Die cast or anodized
 LED Life: 50,000 Hours
 LED Type: Cree LED
 Driver Info: 120-277V, 50/60 Hz, PF>0.9, THD<0.20
 Warranty: 5 year limited warranty

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

ADJUSTMENT

- Light engine locked at 25° tilt, consult factory for other tilt setting.
- Housing provides for 360° locking rotation
- Aperture collar adjusts 15°± horizontally within frame for square ceiling alignment
- Collar notch allows for easy alignment for square applications.
- Aperture collar compatible up to 1½" ceiling thickness.
- Accommodation for 2" or 3" ceiling thickness available upon request.

OPTICS

Field replaceable optical lens available in 18°, 30°, 50°, and 80°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

DIMMING

Available in 8 driver selections. **(ID)** Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. **(PEQ0)** Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. **(LDE1)** Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. **(LTE)** Lutron Hi-Lume 1% 2-wire, 120V. **(L3DA)** Hi-lume 1% EcoSystem/3-Wire L3D Driver **(EEI)** eldoLED Eco 1% Dim (0-10V), 120-277V. **(EDIO)** eldoLED Solo 0.1% Dim(0-10V), 120-277V. **(EDID)** eldoLED Solo 0.1% Dim(DALI), 120-277V.

THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

TRIM OPTIONS

- All trims are self flanged die cast or anodized.
- Trim includes standard frosted acrylic diffuser.
- 12% lumens increase if remove standard frosted acrylic diffuser in field.
- Optical Enhancer reflects light evenly across the diffuser lens.
- Trims available in round or square in an assortment of standard or made to order finishes.

LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- Energy Star
- Dry/Damp/Wet location rated.
- Title 24, JA8 Compliant
- 5 Year limited warranty



HOUSING ORDERING INFORMATION

RPA4						
Series	Lumens	Color Temp	Voltage	Dimming	Optical Lens ⁹	Filter
PRIME	8L ¹ - 820 lm	27 - 2700K	UNV - 120-277V	ID ³ - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	18 - 18°	None - Leave blank
SERIES	9L ¹ - 955 lm	30 - 3000K	120 - 120V	PEQ0 ⁵ - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming	30 - 30°	F - Frosted filter
	13L ¹ - 1305 lm	35 - 3500K	347 ² - 347V	LDE1 ^{5,6} - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming	50 - 50°	H - Honey comb
	16L ¹ - 1695 lm	40 - 4000K		LTE ⁵ - Lutron Hi-Lume 1% 2-wire	80 - 80°	S - Solite filter
	20L ¹ - 2010 lm			L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver		
	24L ¹ - 2455 lm			EEI ^{6,7,8} - eldoLED Eco 1% Dim (0-10V)		
	28L ¹ - 2825 lm			EDIO ^{6,7,8} - eldoLED Solo 0.1% Dim (0-10V)		
	29L ¹ - 2900 lm			EDID ^{6,7,8} - eldoLED Solo 0.1% Dim (DALI)		

Housing Type	Aperture	Frame Accessories	Collar	Option
NC - Non-IC New Construction IC ¹⁰ - IC New Construction	SLWP - Square Flangeless Wall Wash Plaster SLWM - Square Flangeless Wall Wash Millwork	C - C Channel bar hanger B - Flat bar hanger	Blank - 1.5" Depth 20 - 2" Depth 30 - 3" Depth MTO - Made to order	EI8 - Emergency battery with integral switch(800 Lumens) ER8 - Emergency battery with remote switch (800 Lumens) EI17 - Emergency battery with integral switch(1700 Lumens) ER17 - Emergency battery with remote switch (1700 Lumens) FCJS-E - Vive wireless individual controller(Ecosystem) FCJS-O - Vive wireless individual controller(0-10) CP ¹⁰ - Chicago Plenum

TRIM ORDERING INFORMATION

4SLA		
Aperture Size / Shape / Trim Type / Style	Bevel Finish	Options
4SLA - 4" Square Flangeless Accent	W - White B - Black H - Haze S - Specular Clear WE - Wheat MTO - Made to order	WL - Wet location

1. Compatible with IC new construction housing.
2. Step down transformer required.
3. Intelligent Drive is the standard driver.
4. Driver must not exceed 1305 lm
5. 120V only.
6. Inapplicable to 2900 Lumen offering.
7. Must specify logarithmic or linear eldoLED driver.
8. Confirm dimming curve: linear or logarithmic.
9. Without standard frosted acrylic diffuser.
10. Compatible up to 1695 lumens.

PRIME

PRIME 4" LED ARCHITECTURAL SQUARE FLANGELESS WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

4" PRIME WALL WASH



LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
11W	820 Lm	120-277V	93+
16W	955 Lm	120-277V	93+
20W	1305 Lm	120-277V	93+
30W	1695 Lm	120-277V	93+
31W	2010 Lm	120-277V	93+
38W	2455 Lm	120-277V	93+
45W	2825 Lm	120-277V	93+
58W	2900 Lm	120-277V	93+

*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
 **Lumens will vary based on CCT, optical lens, and bevel finish.

DIMENSION



Trim Details

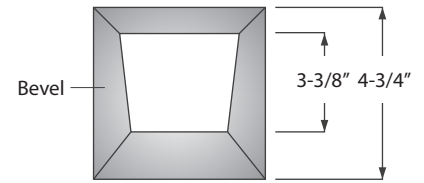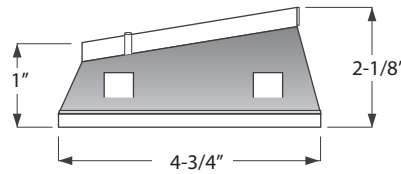


1 PIECE DIE CAST

LED HOLDER & FILTER DIMENSION



LED Holder and Filter

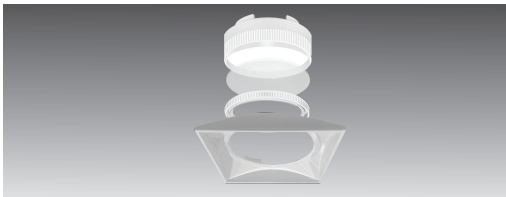

Filter



LED Holder



Light Enhancer

PRIME



PRIME 4" LED ARCHITECTURAL
SQUARE FLANGELESS WALL WASH

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

4" PRIME WALL WASH




DIMENSION

Trim Details

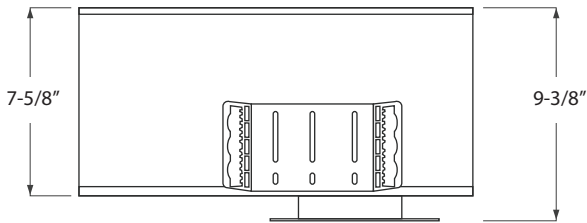


Ceiling Cut-out: 5-3/16 X 5-3/16"
Maximum Ceiling Thickness: 1-1/2"
Minimum Ceiling Thickness: 1/2"
Consult factory for custom ceiling thickness

Housing Details

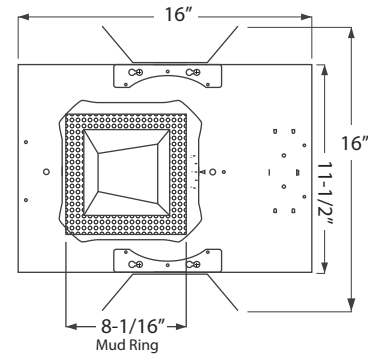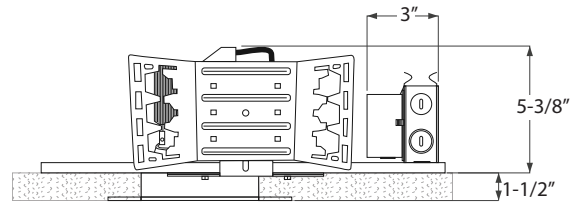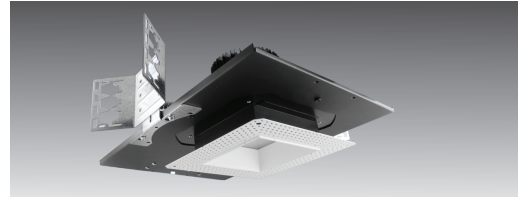

COLLAR DEPTH PER CEILING THICKNESS

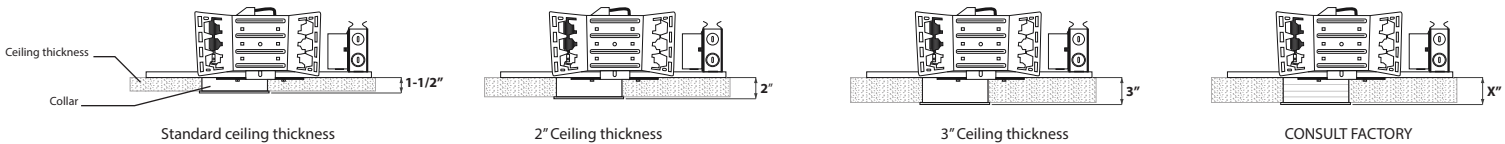


PRIME

PRIME 4" LED ARCHITECTURAL SQUARE FLANGELESS WALL WASH

IES TECH INFO AT A GLANCE

RPA - 7L 18° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-7L-30K-18°-SLW
LUMENS	664 LM
WATTS	11.7 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	264.1	39.8%	39.8%
0-40	415.5	62.5%	62.5%
0-60	613.6	92.4%	92.4%
60-90	50.3	7.6%	7.6%
0-90	663.9	99.9%	100%

RPA - 7L 30° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-7L-30K-30°-SLW
LUMENS	726.42 LM
WATTS	11.7 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	289.6	39.9%	39.9%
0-40	455.6	62.7%	62.7%
0-60	672.6	92.6%	92.6%
60-90	53.5	7.4%	7.4%
0-90	726.1	100%	100%

RPA - 7L 50° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-7L-30K-50°-SLW
LUMENS	645 LM
WATTS	11.7 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	261.4	40.5%	40.5%
0-40	406.6	63%	63%
0-60	597.0	92.5%	92.6%
60-90	48.1	7.4%	7.4%
0-90	645.1	100%	100%

RPA - 7L 80° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-7L-30K-80°-SLW
LUMENS	536 LM
WATTS	11.7 W
CCT	3000K

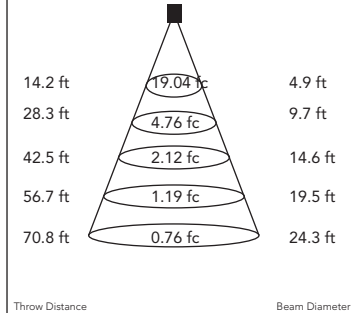


Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	218.8	40.8%	40.8%
0-40	337.7	62.9%	63%
0-60	495.6	92.3%	92.4%
60-90	40.9	7.6%	7.6%
0-90	536.4	100%	100%

RPA - 9L 18° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-9L-30K-18°-SLW
LUMENS	870 LM
WATTS	16.0 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	465.7	53.5%	53.5%
0-40	644.7	74%	74.1%
0-60	828.8	95.2%	95.2%
60-90	41.7	4.8%	4.8%
0-90	870.5	100%	100%

RPA - 9L 30° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-9L-30K-30°-SLW
LUMENS	953 LM
WATTS	16.0 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	505.5	53%	53%
0-40	703.4	73.8%	73.8%
0-60	907.9	95.2%	95.2%
60-90	54.4	4.8%	4.8%
0-90	953.3	100%	100%

RPA - 9L 50° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-9L-30K-50°-SLW
LUMENS	759 LM
WATTS	16.0 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	388.0	51.1%	51.1%
0-40	550.2	72.4%	72.4%
0-60	720.4	94.8%	94.8%
60-90	39.1	5.1%	5.1%
0-90	759.5	100%	100%

RPA - 9L 80° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-9L-30K-80°-SLW
LUMENS	584 LM
WATTS	16.0 W
CCT	3000K

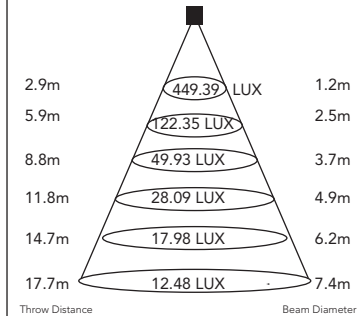

Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	288.4	49.3%	49.3%
0-40	414.7	70.9%	70.9%
0-60	551.7	94.3%	94.3%
60-90	32.9	5.6%	5.6%
0-90	584.6	100%	100%

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

PRIME


PRIME 4" LED ARCHITECTURAL
SQUARE FLANGELESS WALL WASH

IES TECH INFO AT A GLANCE

4" PRIME WALL WASH

RPA - 11L 18° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-11L-30K-18°-SLW
LUMENS	1026 LM
WATTS	20.4 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	408.9	39.8%	39.9%
0-40	642.9	62.7%	62.7%
0-60	949.5	92.5%	92.6%
60-90	76.2	7.4%	7.4%
0-90	1,025.8	100%	100%

RPA - 11L 30° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-11L-30K-30°-SLW
LUMENS	1125 LM
WATTS	20.4 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	448.6	39.9%	39.9%
0-40	705.8	62.7%	62.7%
0-60	1,042.2	92.6%	92.6%
60-90	82.7	7.3%	7.3%
0-90	1,124.9	100%	100%

RPA - 11L 50° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-11L-30K-50°-SLW
LUMENS	1000 LM
WATTS	20.4 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	406.4	40.6%	40.6%
0-40	631.6	63.1%	63.1%
0-60	926.0	92.5%	92.6%
60-90	74.4	7.4%	7.4%
0-90	1,000.4	99.9%	100%

RPA - 11L 80° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-11L-30K-80°-SLW
LUMENS	837 LM
WATTS	20.5 W
CCT	3000K

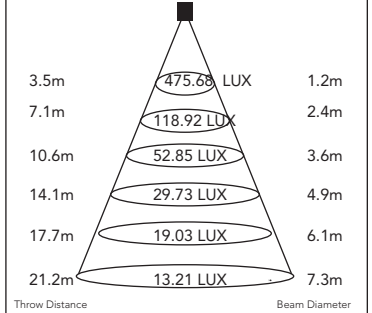


Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	341.7	40.8%	40.8%
0-40	527.3	63%	63%
0-60	773.4	92.3%	92.4%
60-90	63.8	7.6%	7.6%
0-90	837.2	100%	100%

RPA - 14L 18° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-14L-30K-18°-SLW
LUMENS	1343 LM
WATTS	30.4 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	534.6	39.8%	39.8%
0-40	840.8	62.6%	62.6%
0-60	1,241.2	92.4%	92.4%
60-90	101.7	7.6%	7.6%
0-90	1,342.9	99.9%	100%

RPA - 14L 30° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-14L-30K-30°-SLW
LUMENS	1439 LM
WATTS	30.4 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	578.0	40.2%	40.2%
0-40	906.7	63%	63%
0-60	1,333.2	92.6%	92.7%
60-90	105.1	7.3%	7.3%
0-90	1,438.3	99.9%	100%

RPA - 14L 50° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-14L-30K-50°-SLW
LUMENS	1288 LM
WATTS	30.4 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	524.9	40.7%	40.7%
0-40	814.7	63.2%	63.2%
0-60	1,192.5	92.5%	92.6%
60-90	95.6	7.4%	7.4%
0-90	1,288.2	100%	100%

RPA - 14L 80° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-14L-30K-80°-SLW
LUMENS	1098 LM
WATTS	30.5 W
CCT	3000K

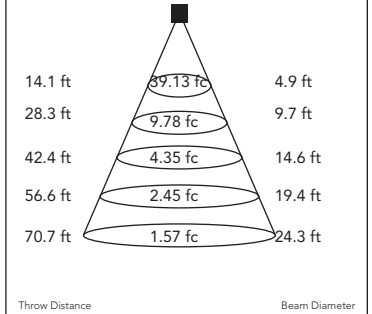

Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	449.3	40.9%	40.9%
0-40	692.9	63.1%	63.1%
0-60	1,014.9	92.4%	92.4%
60-90	83.1	7.6%	7.6%
0-90	1,098.0	99.9%	100%

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

PRIME


PRIME 4" LED ARCHITECTURAL
SQUARE FLANGELESS WALL WASH

IES TECH INFO AT A GLANCE

4" PRIME WALL WASH

RPA - 17L 18° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-17L-30K-18°-SLW
LUMENS	1669 LM
WATTS	29.7 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	673.2	40.3%	40.3%
0-40	1,051.6	63%	63%
0-60	1,545.2	92.6%	92.6%
60-90	123.5	7.4%	7.4%
0-90	1,668.7	100%	100%

RPA - 17L 30° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-17L-30K-30°-SLW
LUMENS	1793 LM
WATTS	29.7 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	723.2	40.3%	40.3%
0-40	1,131.0	63.1%	63.1%
0-60	1,661.8	92.6%	92.7%
60-90	130.9	7.3%	7.3%
0-90	1,792.8	99.9%	100%

RPA - 17L 50° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-17L-30K-50°-SLW
LUMENS	1625 LM
WATTS	29.7 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	663.0	40.8%	40.8%
0-40	1,027.3	63.2%	63.3%
0-60	1,502.8	92.5%	92.5%
60-90	121.0	7.4%	7.5%
0-90	1,623.8	99.9%	100%

RPA - 17L 80° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-17L-30K-80°-SLW
LUMENS	1420 LM
WATTS	29.8 W
CCT	3000K

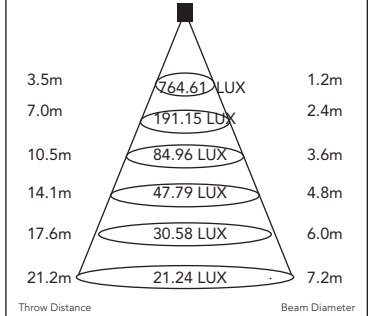


Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	581.3	40.9%	41%
0-40	895.8	63.1%	63.1%
0-60	1,310.4	92.3%	92.4%
60-90	108.3	7.6%	7.6%
0-90	1,418.7	99.9%	100%

RPA - 21L 18° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-21L-30K-18°-SLW
LUMENS	1996 LM
WATTS	37.9 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	804.5	40.3%	40.3%
0-40	1,257.1	63%	63%
0-60	1,847.8	92.6%	92.6%
60-90	147.7	7.4%	7.4%
0-90	1,995.5	99.9%	100%

RPA - 21L 30° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-21L-30K-30°-SLW
LUMENS	2121 LM
WATTS	37.8 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	855.4	40.3%	40.4%
0-40	1,336.7	63%	63.1%
0-60	1,963.6	92.6%	92.7%
60-90	155.5	7.3%	7.3%
0-90	2,119.1	99.9%	100%

RPA - 21L 50° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-21L-30K-50°-SLW
LUMENS	1920 LM
WATTS	37.8 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	782.2	40.7%	40.8%
0-40	1,212.6	63.1%	63.2%
0-60	1,775.4	92.4%	92.5%
60-90	143.4	7.5%	7.5%
0-90	1,918.8	99.9%	100%

RPA - 21L 80° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-21L-30K-80°-SLW
LUMENS	1680 LM
WATTS	37.8 W
CCT	3000K

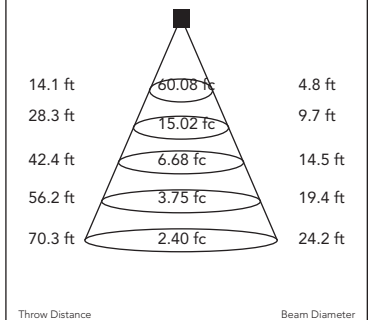

Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	689.5	41%	41%
0-40	1,062.2	63.2%	63.2%
0-60	1,553.1	92.4%	92.4%
60-90	126.5	7.5%	7.5%
0-90	1,679.7	100%	100%

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

6 of 7

PRIME


PRIME 4" LED ARCHITECTURAL
SQUARE FLANGELESS WALL WASH

IES TECH INFO AT A GLANCE

4" PRIME WALL WASH

RPA - 23L 18° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-23L-30K-18°-SLW
LUMENS	2187 LM
WATTS	45.7 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	882.0	40.3%	40.3%
0-40	1,377.5	63%	63%
0-60	2,023.1	92.5%	92.6%
60-90	162.3	7.4%	7.4%
0-90	2,185.4	99.9%	100%

RPA - 23L 50° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-23L-30K-50°-SLW
LUMENS	2135 LM
WATTS	45.7 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	869.0	40.7%	40.7%
0-40	1,348.4	63.1%	63.2%
0-60	1,975.6	92.5%	92.5%
60-90	159.0	7.4%	7.4%
0-90	2,134.6	99.9%	100%

RPA - 23L 80° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-23L-30K-80°-SLW
LUMENS	1857 LM
WATTS	45.6 W
CCT	3000K

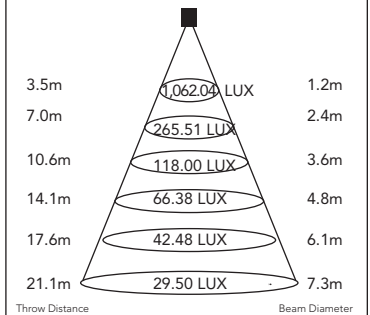


Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	762.0	41%	41%
0-40	1,174.2	63.2%	63.2%
0-60	1,717.2	92.4%	92.5%
60-90	139.9	7.5%	7.5%
0-90	1,857.1	100%	100%

RPA - 25L 18° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-25L-30K-18°-SLW
LUMENS	2323 LM
WATTS	57.3 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	1,205.4	51.9%	51.9%
0-40	1,690.0	72.7%	72.7%
0-60	2,200.2	94.7%	94.7%
60-90	122.9	5.3%	5.3%
0-90	2,323.1	100%	100%

RPA - 25L 30° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-25L-30K-30°-SLW
LUMENS	2516 LM
WATTS	57.0 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	1,302.6	51.8%	51.8%
0-40	1,830.6	72.7%	72.8%
0-60	2,384.7	94.8%	94.8%
60-90	130.4	5.2%	5.2%
0-90	2,515.1	99.9%	100%

RPA - 25L 50° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-25L-30K-50°-SLW
LUMENS	2126 LM
WATTS	57.0 W
CCT	3000K




Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	1,064.4	50.1%	50.1%
0-40	1,520.4	71.5%	71.5%
0-60	2,007.7	94.4%	94.5%
60-90	117.9	5.5%	5.5%
0-90	2,125.6	100%	100%

RPA - 25L 80° BEAM

TEST DATE	2017-10-11
SERIES	RPA4-25L-30K-80°-SLW
LUMENS	1816 LM
WATTS	57.0 W
CCT	3000K

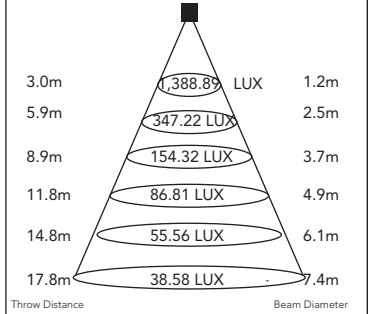

Zone Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	890.3	49%	49%
0-40	1,282.2	70.6%	70.6%
0-60	1,710.4	94.2%	94.2%
60-90	104.9	5.8%	5.8%
0-90	1,815.3	100%	100%

[CLICK HERE OR VISIT PRODUCT PAGE FOR COMPREHENSIVE TECHNICAL INFORMATION](#)

7 of 7