



## ICON 8" GLASS PENDANT XT SERIES / 3000 LUMENS MAX LED

speculume  
decorative



### DP8LEDXT

#### APPLICATION

The Icon Pendant series features a classic glass shade for decorative area lighting.

#### FEATURES

Speculume series fixtures offer contemporary style with functional luminaire performance. Separate finishes may be chosen for fixture and mounting. Interchangeable LED module for ease of maintenance. Electronic LED Driver in canopy for thermal management. A variety of mounting and finish options available.

#### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

#### ELECTRONICS


LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 1 x 2 MacAdam Ellipses binning. High CRI is 98 with 1 x 2 MacAdam Ellipses binning. Variety of electronic 120V/277V and dimming drivers.

#### CONSTRUCTION

Glass is molded blown white cased inside and soft etched outside for even glare free illumination. Passive extruded aluminum heatsink for optimal thermal management.

#### CODE COMPLIANCE

ARRA Compliant. ETL listed for damp locations. Manufactured and tested to UL standard No. 1598/8750.

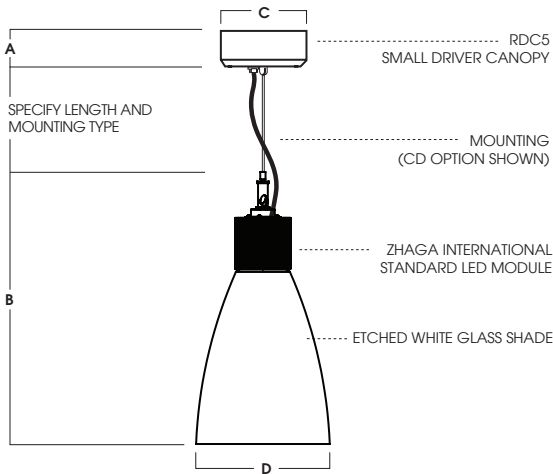

A	B	C	D
2.3 58.4 mm	17.1 434.3 mm	5.3 134.6 mm	8.6 218.4 mm

WATTAGE / LUMENS DATA				
PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
DP8LEDXT10L	1000	782	9.1	85.9
DP8LEDXT13L	1300	1053	13.0	81.0
DP8LEDXT20L	2000	1620	20.7	78.3
DP8LEDXT30L	3000	2430	32.6	74.5

SERIES	LUMENS <sup>1</sup>		CCT	DRIVER / DIMMING <sup>3</sup>		MOUNTING <sup>5</sup>		FINISH <sup>8</sup>			
DP8LEDXT	10L	1000 Lm	83 CRI	EX DS10X DO10X DS2W1 DLTE1 <sup>4</sup>  DL3EX <sup>4</sup> Electronic Driver, 120V/277V 10% 0-10v Dimming, 120V/277V 1% 0-10v Dimming, 120V/277V 2 Wire Phase Dimming, 120V Lutron 2 Wire Phase Dimming, 120V Only Lutron ECO System Dimming, 120V/277V	RDC5 <sup>6</sup> CP13 <sup>4</sup> CD <sup>7</sup> HM <sup>7</sup> HMA1 <sup>7</sup> PM <sup>7</sup> Small Driver Canopy Large Driver Canopy Cord / Cable Mount Hang Straight Hang Straight All Thread Rigid Pendant Mount	EMCP7W EMRM7W EMEN7W EMLN7W 7W Canopy Mounted EM 7W Remote EM 7W Remote with Enclosure 7W In-Line EM (For Pendants)	MW <sup>9</sup> MB <sup>9</sup> PT <sup>9</sup> TW TB MT BZ OB CH GH AC SN BR AN CO CC Matte White Matte Black Platinum Textured White Textured Black Textured Silver Bronze Oil Rubbed Bronze Charcoal Graphite Champagne Sun Gold Brecchia Rust Anodic Natural Copper Metallic Custom Color				
	13L	1300 Lm	27K							2700K	
	20L	2000 Lm	30K							3000K	
	30L	3000 Lm	35K							3500K	
			40K							4000K	
			98 CRI								
			27HK							2700K	
			30HK							3000K	
			35HK							3500K	
			40HK							4000K	

**EXAMPLE:** DP8LEDXT10L35KEXRDC5CD36MW

#### NOTES:

1 Nominal Source Lumens At Any CCT 2 Nominal Delivered Lumens At Any CCT 3 Contact Factory for Additional Options 4 CP13 Required for Lutron Drivers  
5 See Mounting Page for Details on Components and Finishes 6 Required for All Drivers Excluding Lutron Drivers 7 Specify Length in Inches: See Mounting Page for Available Lengths  
8 Contact Factory for Special Finishes 9 Standard Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



PROJECT:	TYPE:
CAT. NO.:	

WWW.SPECLIGHT.COM • 994 JEFFERSON STREET, FALL RIVER, MA 02721 • 508.678.2303 FAX 508.678.2260

LIGHTSOURCE BY  
**XICATO**





SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.  
 NOTE: THIS IS TYPICAL OF SPECLUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.

## MOUNTING TYPES

### HM\*

HANG STRAIGHT  
 45° SWIVEL 1/2" STEM - 3/8" NPT



ORDER: **HM** (Length)

SPECIFY LENGTH:

**HM3** - 3" **HM24** - 24"

**HM6** - 6" **HM36** - 36"

**HM12** - 12" **HM48** - 48"

**HM18** - 18" **HM72** - 72"


**HMLC(XX)**

Custom Length

(Specify in Inches)

### HMAT\*

HANG STRAIGHT ALL THREAD  
 45° SWIVEL 1/2" STEM - 1/4" IP



ORDER: **HMAT** (Length)

SPECIFY LENGTH:

**HMAT12** - 12"

**HMAT24** - 24"

**HMAT36** - 36"


**HMAT48** - 48"

**HMAT72** - 72"

**HMATLC(XX)**


Custom Length

(Specify in Inches)



### PM\*

RIGID PENDANT MOUNT  
 RIGID 1/2" STEM - 3/8" NPT



ORDER: **PM** (Length)

SPECIFY LENGTH:

**PM3** - 3" **PM24** - 24"

**PM6** - 6" **PM36** - 36"

**PM12** - 12" **PM48** - 48"

**PM18** - 18" **PM72** - 72"

**PMLC(XX)**

Custom Length

(Specify in Inches)

### CD

CORD / CABLE MOUNT  
 SJ CORD WITH 1/16 SS CABLE



ORDER: **CD** (Length)

SPECIFY LENGTH:

**CD36** - 36"

**CD72** - 72"

**CD144** - 144"

**CDLC(XX)**

Custom Length

(Specify in Inches)

### CM

CORD MOUNT  
 SJ CORD STRAIN RELIEF



ORDER: **CM** (Length)

SPECIFY LENGTH:

**CM36** - 36"

**CM72** - 72"

**CM144** - 144"

**CMLC(XX)** - Custom Size

(Specify in Inches)

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.

## MOUNTING FINISH


Standard Canopy / Stem or Cord mounting finish is matte white. Black fixtures receive matte black mounting finish, silver fixture receive silver mounting finish. Custom colors for canopy and stem are available upon request.

## MOUNTING COMPONENTS FINISH


FIXTURE COLOR	CANOPY / STEM / CORD COLOR
Matte White, Textured White	Matte White
Matte Black, Textured Black, Bronze, Oil Rubbed Bronze	Matte Black
Platinum, Textured Silver, Silver	Silver
All Others	Matte White
Custom Color	Canopy / Stem Same Color as Fixture

## DRIVER CANOPY OPTIONS


**RDC5** - SMALL DRIVER CANOPY (STANDARD)  
 (USED ON ROUND PENDANT FIXTURES)



**SDC5** - SMALL DRIVER CANOPY  
 (USED ON SQUARE PENDANT FIXTURES)




**CP13** - LARGE DRIVER CANOPY  
 (USED ON ROUND PENDANT FIXTURES  
 WITH SPECIAL OR LARGE DRIVER)




## EMERGENCY BATTERY OPTIONS

**EMCP7W** - LARGE DRIVER CANOPY FOR  
 7W EMERGENCY BATTERY  
 (FOR ALL CEILING MOUNT TYPES)




**EMLN7W** - 7W IN-LINE EMERGENCY BALLAST  
 (FOR HM, HMAT, AND PM OPTIONS)



## REMOTE EMERGENCY BATTERY OPTIONS

**EMRM7W** - REMOTE EMERGENCY BATTERY  
 (UP TO 12W, 50" MAX)




EM WATTAGE	A	B	C
EMRM5W	1.5	9.0	9.5
EMRM7W*	1.3	12.6	13.0
EMRM12W	1.3	12.8	13.3

\*STANDARD




**EMEN7W** - REMOTE EMERGENCY BATTERY  
 WITH ENCLOSURE  
 (UP TO 12W, 50" MAX)



ENCLOSURE	A	B	C
EMEN5W	2.0	17.0	6.2
EMEN7W*	2.0	17.0	6.2
EMEN12W	2.0	17.0	6.2

\*STANDARD



Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.

PROJECT:

TYPE:

CAT. NO.:




SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS.  
 NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.  
 SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.

### COMMONLY PRODUCED STANDARD FINISHES - AVAILABLE FOR QUICK SHIP



### OTHER AVAILABLE STANDARD FINISHES

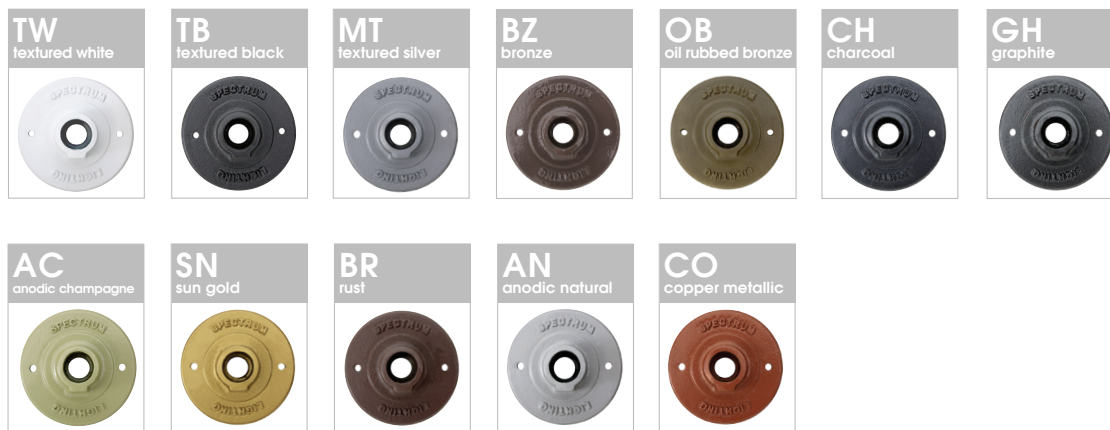

### NON-STANDARD OPTIONAL FINISHES



Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.

PROJECT:

TYPE:

CAT. NO.: