




# RFL4E-CY-12

## ARCHITECTURAL PULL DOWN CYLINDER


Job Information	Project:
	Model#:
	Location:
	Contact:



### DIMENSIONS



### Mounting Features

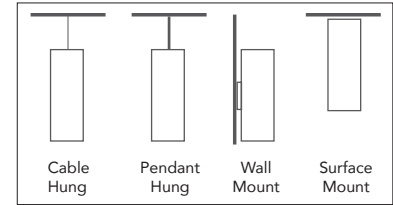

PULL DOWN CYLINDER

### USE OF PRODUCT

The Architectural Cylinder Pull Down Series may be used in hospitality, commercial, retail, and residential applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

### HOUSING

Rugged aluminum housing.

### ARCHITECTURAL CYLINDER FEATURES

- Wattage: 12 Watts
- Lumens: 830 Lumens
- Voltage: 120V
- Color Temperature: 2700K, 3000K, 3500K, or 4000K R9 Value: 85
- Color Rendering Index: 93 CRI Typical
- LED Life: 50,000 hours
- LED type: Cree LED for maximum light output
- Versatility: Interchangeable optics available in 19° and 38°. 365° horizontal rotations; 65° vertical drop from nadir.
- Warranty: 5 Year Limited Warranty

### LED Driver

Durable 120 Volt dimmable driver provides high power factor with optimum thermal management to prevent damage caused by high temperature.

### DIMMING

The Architectural Cylinder Pull Down Series is dimmable to 15% with standard 120 Volt electronic low voltage dimmers, various incandescent/magnetic low voltage dimmers, or to 5% with select dimmers.

### Mounting

The Architectural Cylinder Pull Down Series may be cable hung, stem mount, surface mount or wall mounted.

### Module Mechanics

- The Architectural Cylinder Pull Down Series provides 359° horizontal rotation within module and 65° vertical drop from nadir. - Carefully designed heat sink keeps junction temperatures below unsuitable levels by keeping heat away from the LEDs.
- Diffused lens allows for even light output, glare control, and conceals LED from view.

### Labels / Compliance

CSA Classified  
CSA Classified for damp locations.



### ORDERING INFO

RFL	4E	CY						
Series	Diameter	Shape	Length	Watts/Lumens	Color Temp.	Cylinder Finish	Pull Down Finish	Beam Angle
RFL	4E - 4" Pull-Down	CY - Cylinder	12 - 12" MTO - Made to order	8L - 12Watts/830 Lumens (120V)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	BL - Black WH - White SL - Silver MTO - Made to order	W - White BL - Black SN - Satin Nickel BZ - Bronze	19 - 19° 38 - 38°

Configuration	Mounting	Option
DL - Down Light	PH <sup>1</sup> - Pendant Hung SC <sup>2</sup> - Single Cable DC - Double Cable TC - Triple Cable SM - Surface Mount WM - Wall Mount	018 - 0-10V Dimming(800lm)

1. 18" Standard length, Consult factory  
2. 5' Standard cable length



www.rayonlighting.com  
info@rayonlighting.com

Tel: 323.446.2626  
Fax: 323.446.2606

Specification and product availability subject to change without notice.

05/22