

## RFL4A-SL-12

SQUARE LUMINAIRE LED ADJUSTABLE

PROJECT:


MODEL #:

LOCATION:


CONTACT:



### DIMENSIONS



### MOUNTING FEATURES

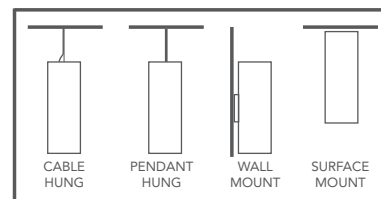

### USE OF PRODUCT

The Versatrim Adjustable Square Luminaire Series may be used in hospitality, commercial, retail, and residential interior applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

### HOUSING

Rugged aluminum housing.

### SQUARE LUMINAIRE FEATURES

- Wattage: 11 Watts
- Lumens: 900 Lumens
- Voltage: 120V standard; 120-277V (with optional 0-10V dimming driver)
- Color Temperature: 2700K, 3000K, 3500K, 4000K
- SDCM: 2 Step binning

- R9 Value: 85

- Color Rendering Index: 93 CRI Typical
- LED Life: 50,000 hours
- LED Type: Cree LED for maximum light output
- Versatility: Interchangeable baffle, reflector and trim ring
- Warranty: 5 Year Limited Warranty

### DIMMING

Available in 11 driver selections. Standard Triac/ELV, 120V. (019) 0-10V dimming in 900 lumens, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (PEQ1) Lutron Hi-Lume Premier Ecosystem 1% w/soft on, fade to black dimming, (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Lutron Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

### MOUNTING

The Versatrim Adjustable Square Luminaire Series may be cable hung, stem mount, surface mount or wall mounted.

### MODULE MECHANICS

The Versatrim Square Luminaire Series is constructed of a durable heat sink, baffle or reflector, trim ring, diffused lens, and Cree LEDs for optimum performance. Carefully designed heat sink keeps junction temperatures below unsuitable levels by dissipating heat away from the module. Diffused polycarbonate impact-resistant lens allows for even light output, glare control, and conceals LEDs from view. The Adjustable Square Luminaire Series provides 0-30° tilt and 360° Rotation.

### LABELS / COMPLIANCE

CSA classified  
CSA classified for damp locations

### ORDERING INFO

RFL	4A	SL					
Series	Diameter	Shape	Length	Watts/Lumens	Color Temp.	Dimming	Luminaire Finish
RFL	4A - 4" Adjustable	SL - Square Luminaire	12 - 12"	9L - 11Watts/900 Lumens (120V)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	Leave Blank <sup>1</sup> - Triac/ELV 019 <sup>2</sup> - 0-10V Dimming ID <sup>2</sup> - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) PEQ0 <sup>2</sup> - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming PEQ1 <sup>2</sup> - Lutron Hi-Lume Premier Ecosystem 1% w/soft on, fade to black dimming LDE1 <sup>2</sup> - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming LDE5 <sup>2</sup> - Lutron Hi-Lume 5% Ecosystem LTE <sup>12</sup> - Lutron Hi-Lume 1% 2-wire L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver EEI <sup>23</sup> - eldoLED Eco 1% Dim (0-10V) EDIO <sup>23</sup> - eldoLED Solo 0.1% Dim (0-10V) EDID <sup>23</sup> - eldoLED Solo 0.1% Dim (DALI)	BL - Black WH - White SL - Silver MTO - Made to order

Lens Holder Finish	Beam Angle	Reflector	Trim	Configuration	Mounting	Options
HW - White HB - Black HS - Silver	18 - 18° 38° - 38° 60 - 60°	4ARLW - White 4ARLB - Black 4ARLCH - Chrome 4ARLH - Haze 4ARLSN - Satin Nickel 4ARLC - Custom	SQUARE 4STLW - White 4STLB - Black 4STLH - Haze 4STLSN - Satin Nickel 4STLCX - Custom	DL - Down Light	PH <sup>5</sup> - Pendant Hung SC <sup>6</sup> - Single Cable DC - Double Cable TC - Triple Cable SM - Surface Mount WM - Wall Mount	E - Emergency Back-up SDT - Step Down Transformer H - Honey comb F - Frosted Filter

1. 120V only.  
2. Requires dedicated Rayon housing.  
3. Must specify logarithmic or linear eldoLED driver.  
4. Standard beam angle.  
5. 18" Standard length, Consult factory  
6. 5' Standard cable length