




JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
PREPARED BY:	

# T655LEDT

LEDICATED VAPORPROOF-ANGLED SHADE

## DIMENSIONS

15-1/2" (Box mount)  
16-1/4" (Pendant mount)  
19" (Wall Mount)



## FEATURES

### Use of Product

The intended use of this product is to minimize the impact of light pollution on nesting sea turtles and their hatchlings. Typically used to accentuate landscape areas, pedestrian pathways, and entranceways. It is an excellent source to guide walkways or driveways.

### Housing

Heavy duty die cast aluminum housing with integral heat sinking, 3/4" NPS threaded mounts includes shade required to maintain Florida Fish & Wildlife Conservation Commission Certification.

### Finish

Smooth powdercoat finish over a chromate conversion coating or consult factory for made to order architectural finishes.

### Optics

Flat clear tempered glass lens.

### Amber LED

Aluminum board, LED operate between 585 and 595 nm.

### Driver

Electronic Driver, 120-277V, 50/60Hz; Less than 20% THD and PF>0.90. Standard internal surge protection 2kV. 0-10V Dimming standard for a dimming range of 100% to 10%; Dimming source current is 150 microamps.

### Warranty

5-Year warranty for -40°C to +40°C environment.


### Listings/compliance

- CSA - Listed for wet location.
- ANSI/UL 1598
- 8750 IP65 sealed LED compartment

### Photometric Performance

Drive Current		Optics	Input Watts
Watts	(mA)		
23W	116	Type V	27

### Amber LED Spectral Chart

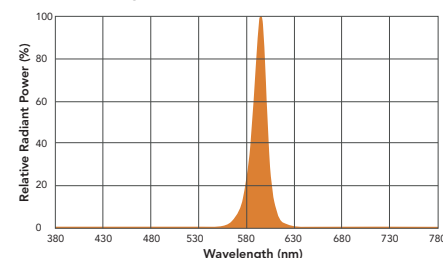

## ORDERING INFO

T655LEDT						
Series	Watt	Voltage	Color Temperature	Finish	Mounting	Options
T-SERIES LED	23 - 23W	UNV - 120V-277V	A - Amber	P <sup>1</sup> - Platinum MTO <sup>2</sup> - Made to order MGTO <sup>2</sup> - Marne grade made to order	WM - Wall mount	SF - Single Fuse DF - Double Fuse WG - Wire Guard SPR - Swivel Pendant Mount Round SPS - Swivel Pendant Mount Square

### Notes:

1. Standard finish.
2. RAL number required.