



# T630LEDT

## SMALL LED TRAPEZOIDAL CUT-OFF WALL PACK

**JOB INFORMATION**

TYPE: \_\_\_\_\_


CATALOG NO. \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

COMMENTS: \_\_\_\_\_

PREPARED BY: \_\_\_\_\_

**DIMENSIONS**

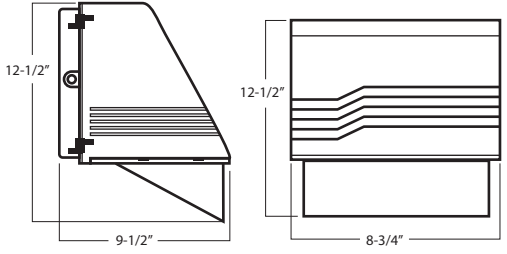

**FEATURES**

**Use of Product**  
 These luminaires are recommended for use in areas where artificial lighting is needed adjacent to ecologically sensitive areas, sea turtle nesting beaches, migratory corridors, and Dark Sky Friendly communities. wall mounted fixtures shall be installed at a maximum mounting height of 8 feet from the floor and are not recommended for use above the first habitable floor when located on the shore perpendicular or beachside of a structure.

**Housing**  
 Rugged die cast aluminum housing with hinged front frame. 1/2" coin plugs with O-rings for conduit & photocell. Includes Full Baffle Required to Maintain Florida Fish & Wildlife Conservation Commission certification.

**Finish**  
 Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

**Optics**  
 Tempered clear flat glass lens is sealed by one-piece silicon gasket prohibits entrance of outside contaminants.

**Amber LED**  
 LED operate between 585 and 595 nm. Aluminum boards

**Driver**  
 Electronic Driver, 120-277V, 50/60Hz; Standard internal surge protection 2kV. 0-10V Dimming standard for dimming range of 100% to 10%.

**Mounting**  
 Cast-in template for mounting directly over a 4" recessed outlet box or 1/2" surface conduit.

**Controls**  
 Fixtures ordered with factory-installed photocell or motion sensor controls are internally wired for switching and/or 1-10V dimming within the housing. remote direct wired interface of 1-10V dimming is not implied and may not be available, please consult factory. fixtures are tested with LEPG controls and may not function properly with controls supplied by others. fixtures are NOT Designed for use with line voltage dimmers.

**Listings/compliance**


- CSA - Listed for wet location.
- ANSI/UL 1598
- 8750 IP65 sealed LED compartment



**Photometric Performance**

Watts	Drive Current (mA)	Optics	Lumens	LPW
22W	525	Type V	794	32

**Amber LED Spectral Chart**

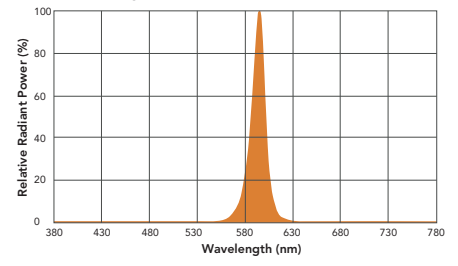

**ORDERING INFO**

T630LEDT	Series	Watt	Voltage	Color Temperature	Distribution Types	Light Shield	Finish
	T-SERIES LED	22 - 22W	UNV-120V-277V H <sup>1</sup> - 347V-480V	A - Amber	T5 - Type V	LS - Light shield	BZ - Bronze MTO - Made to Order MGTO - Marine grade made to Order

**Options**

**Notes:**

1. Step down transformer required.
2. Standard distribution type.

- SF - Single fuse
- DF - Double fuse
- SP - Surge protection
- EM - Emergency battery
- P10 - Pencil Photocell 120VAC
- P12 - Pencil Photocell 208-277VAC
- P20 - Swivel Photocell 120VAC
- P22 - Swivel Photocell 208-277VAC

