



WALL | ARM


Huntington 1

Brilliant by Design™, minimalistic aesthetic combined with our innovative Microstructure EdgeTech Optics (MEO)™ will bring your vision to light. The innovative MEO™ design utilizes high efficiency Microstructure Lenses and Light Guide Plates for high optical extraction and precise light management.

FEATURES

- Innovative Microstructure EdgeTech Optics™ delivers unparalleled optic control and exceptional performance with seamless illumination and uniformity. Specify Batwing, Glare Control, Diffused (Lambertian), Wall Wash, Room Fill or Ceiling Wash Optics.
- MEO™ allows for minimalistic 1.5" Aperture fixtures with extremely low profiles.
- Individual fixture lengths and seamless continuous rows with no lens breaks up to 500 feet.
- Surface Wall or Wall Arm Mount with 1" rotational hub
- Optional Ceiling Arm Mount with 1" rotational hub
- Innovative Toolless "Push to Eject" System allows for easy installation and serviceability.
- No visible fasteners.
- Specified Lumen Outputs (SLO) available.
- Proudly crafted in Huntington Beach, CA - USA.

HUNTINGTON 1 LINEUP

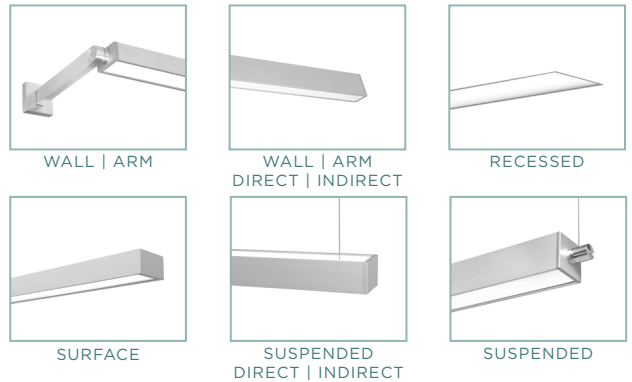

PERFORMANCE OVERVIEW

4' Huntington 1 Direct - 3500K 80CRI				
Lumen Output	LL (Low)	ML (Medium)	HL (High)	SLO* (Specified)
Delivered Lumens	772	1908	3760	772-5920
Consumed Wattage	7	18	38	7.3 - 65.6
Efficacy (lm/W)	105	105	99	90-105
SDCM	3	3	3	3

*Specified Lumen Output (SLO) available in customizable lumen configurations (896 lm - 6852 lm). See SLO Configurator at ExtantLighting.com



Ordering Information

PROJECT _____ TYPE _____
 PRODUCT _____ QTY _____

Product Family	Driver Location	Mounting Direction	Length	Lumen Output
HTG-1W Huntington Series 1.5" Aperture (Wall Mount)	<input type="checkbox"/> TD Integral Driver <input type="checkbox"/> RD Remote Driver	<input type="checkbox"/> DT Direct <input type="checkbox"/> UT Indirect Note: Leave blank if Wall Mounted Rotational Arm (WR) selected in MOUNTING	<input type="checkbox"/> _____* Specify length <input type="checkbox"/> L_x_ L Pattern <input type="checkbox"/> CP Custom Pattern *Minimum Integral Driver length is 2'. Minimum Remote or In Canopy Driver can be shorter, consult factory. *Custom length fixtures can be ordered in 3" increments. *Any length over 8' requires multiple fixture segments. **Patterns are not available on Rotational Arm Mount fixtures	<input type="checkbox"/> DLL Low (193 l/ft @ 1.84 W)* <input type="checkbox"/> DML Medium (477 l/ft @ 4.55 W)* <input type="checkbox"/> DHL High (940 l/ft @ 9.46 W)* <input type="checkbox"/> SLO-xx **Specified Lumen Output available. *Delivered lumen output & consumed wattage based on "MEODF 835" (80 CRI - 3500K). See SLO Configurator for alternate outputs.


Optics	Color Temp	Voltage	Driver
<p>MEO</p> <input type="checkbox"/> MEODF Diffusing <input type="checkbox"/> MEOBW Batwing <input type="checkbox"/> MEOGC Glare Control <input type="checkbox"/> MEORF Room Fill <input type="checkbox"/> MEOCW** Ceiling Wash <input type="checkbox"/> MEOWW* Wall Wash	<p>80+ CRI</p> <input type="checkbox"/> 830 3000K <input type="checkbox"/> 835 3500K <input type="checkbox"/> 840 4000K <input type="checkbox"/> 8TW* Tunable White (2700K-6500K) <p>90+ CRI</p> <input type="checkbox"/> 927 2700K <input type="checkbox"/> 930 3000K <input type="checkbox"/> 935 3500K <input type="checkbox"/> 940 4000K <input type="checkbox"/> XX Optional Color Temp & CRI Available *Contact factory for Driver compatibility with 8TW	<input type="checkbox"/> VU 120V-277V <input type="checkbox"/> V3 347V <input type="checkbox"/> V1 120V (for DL2 Driver only) *PRO Optics are only available in 90+ CRI **PRO Optics recommended for indirect only ***MEOCW for indirect only. ***Wall Wash optic available with Rotation Arm Mount ONLY See Page 4 for Optic Detail	<input type="checkbox"/> D'_ 1% 0-10V <input type="checkbox"/> DN NON DIM <input type="checkbox"/> DL5 Lutron 5-Series EcoSystem <input type="checkbox"/> DL1 Lutron Hi-Lume 1% EcoSystem <input type="checkbox"/> DL2 Lutron Hi-Lume 1% 2-wire (120V only) <input type="checkbox"/> DE* .1% 0-10V <input type="checkbox"/> DD1 1% DALI <input type="checkbox"/> DDE .1% DALI <input type="checkbox"/> XX Other (Please Specify) *Dim to Off available. Please Specify "-OFF" next to driver option if required. *1% minimum dimming level and other custom dimming levels and settings available. Consult factory.

Finish	Options	Mounting	Arm Length*	Coverplate*
<input type="checkbox"/> SA* Silver Anodized <input type="checkbox"/> WP* Matte White <input type="checkbox"/> BP* Matte Black <input type="checkbox"/> CC* Custom *When above finish selected, the housing finish and end cap finish will match <input type="checkbox"/> SAMF SA Housing/Machine Finish End Caps <input type="checkbox"/> WPMF WP Housing/Machine Finish End Caps <input type="checkbox"/> BPMF BP Housing/Machine Finish End Caps <input type="checkbox"/> CCMF CC Housing/Machine Finish End Caps	<input type="checkbox"/> EMB*_ Emergency Battery Pack(s) <input type="checkbox"/> EMC*_ Emergency Circuit(s) <input type="checkbox"/> SOC* Occupancy Sensor <input type="checkbox"/> SDL* Daylight Sensor <input type="checkbox"/> BCS* Brilliant Communications Solutions (wired/wireless) <input type="checkbox"/> JA8 JA8 Approved BCS: includes wired and wireless integration from our partners at nLight™, Enlighted, Legrand, Crestron, Osram, Lutron and many more. Contact Extant for details. EMB: Specify quantity of battery packs. Minimum 4' unit. EMC: Specify quantity of emergency circuits. SOC & SDL: Specify spacing/location of sensors(s).	<input type="checkbox"/> SW Surface Wall <input type="checkbox"/> WR* Wall Arm Mount w/1" Rotational Hub <input type="checkbox"/> CR* Ceiling Arm Mount w/1" Rotational Hub Note: Mounting hardware and arm match fixture	Only select when WR option selected above <input type="checkbox"/> L3 3" <input type="checkbox"/> L6 6" <input type="checkbox"/> L9 9" <input type="checkbox"/> L12 12" <input type="checkbox"/> L18 18" <input type="checkbox"/> L24 24" <input type="checkbox"/> L_ *Custom Length *Note: All arm lengths 12" or greater require cable tie backs.	*Only select when WR option selected above <input type="checkbox"/> NC No Coverplate <input type="checkbox"/> 4R 4" Round Coverplate <input type="checkbox"/> 4S 4" Square Coverplate <input type="checkbox"/> 2R 2-1/2" Round Coverplate <input type="checkbox"/> 2S 2" Square Coverplate

EXTANT EXPRESS 9 - DAY SHIPPING
 HIGHLIGHTED ORDERING INFO QUALIFIES
 Max 500'. For more details, visit ExtantLighting.com




Dimensions

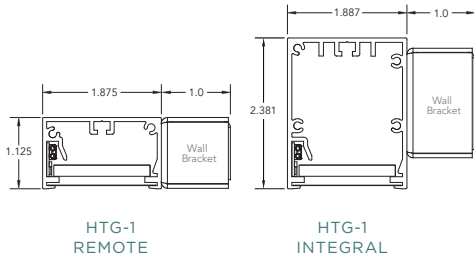

Note: Wall bracket not included when "WR" Rotational Arm mounting is selected.

Patterns

L__X__
L-Shape
Provide Ax B
Example: L6'x4'



Note: ¹Patterns shown and ordered in Plan View.
²Patterns are not available on Arm Mount fixtures

Specifications

Construction One-piece heavy gauge 6063 extruded aluminum housing. Precision-machined aluminum end caps.

Optics Microstructure EdgeTech Optics (MEO)TM utilizes high efficiency Microstructure Lenses and Light Guide Plates for high optical extraction and precise light management. Specify Batwing, Glare Control, Diffused (Lambertian), Wall Wash (Arm Mount Only), Room Fill or Ceiling Wash Optics.

Light Output (3) Standard lumen packages are available: Low (DLL), Medium (DML) and High (DHL). Specified Lumen Output (SLO) packages available. Please see the (SLO) configurator at ExtantLighting.com.

LEDs Latest generation of premium Nichia 3-step MacAdam Ellipse LED's available in (90+ CRI) 2700K, 3000K, 3500K, 4000K or (80+ CRI) 3000K, 3500K or 4000K. LED modules are easily accessible and replaceable.

Voltage Universal 120/277V (VU) and 347V (V3) available. Consult factory for driver options when 347V is specified.

Emergency Battery Factory provided low profile 10W emergency battery for UL924 required 90-minute run time (optional).

Finish Standard finishes include silver anodized, powder coated white or powder coated black. Custom anodized and powder coated finishes available (RAL number matched).

Continuous Rows Innovative Toolless Latch System ensures simple installation. Seamless continuous rows (WM Option Only) with no lens breaks, pixelation or hotspots up to 500 feet (MEODF, MEOGC, MEOWW, MEORF, MEOCW) or 250 feet (MEOBW).

Patterns Standard L Pattern (L) available. Custom patterns available.

Mounting Surface Wall mount, Wall Arm Mount with rotational with 1" rotational hub or Ceiling Arm Mount with 1" rotational hub.

Approvals UL and cUL Listed. Approved for Dry/Damp locations. Made in the USA. JA8 Approved.

Lumen Maintenance (L70) 70% of initial light output = Reported > 60,000 hours | Calculated > 200,000 hours (L90) 90% of initial light output = Reported > 60,000 hours | Calculated > 200,000 hours.

Warranty HTG 1 offered with a 5-year limited warranty. 5-year limited warranty covers LED, Driver and fixture. For further details, refer to General Warranty and Obligations at ExtantLighting.com.

Patents Extant Lighting's intellectual property is protected under Patent Pending Status by the U.S. Patent Office.

* Due to our culture of always striving for product enhancement, specifications and information within this document are subject to change without notice. 2020 Extant Lighting, Inc. All rights reserved.


Continuous Row Detail

NOTE: Detail below is specific to the Surface Wall only. For additional Continuous Row Detail, please visit ExtantLighting.com


Nominal Row Length (ft)	Segment Lengths (ft)	Overall Row Length
9	5 + 4	9' 1/2"
10	6 + 4	10' 1/2"
11	7 + 4	11' 1/2"
12	8 + 4	12' 1/2"
13	8 + 5	13' 1/2"
14	8 + 6	14' 1/2"
15	8 + 7	15' 1/2"
16	8 + 8	16' 1/2"
17	8 + 5 + 4	17' 1/2"
18	8 + 6 + 4	18' 1/2"
19	8 + 7 + 4	19' 1/2"
20	8 + 8 + 4	20' 1/2"
21	8 + 8 + 5	21' 1/2"
22	8 + 8 + 6	22' 1/2"
23	8 + 8 + 7	23' 1/2"
24	8 + 8 + 8	24' 1/2"
25	8 + 8 + 5 + 4	25' 1/2"
26	8 + 8 + 6 + 4	26' 1/2"
27	8 + 8 + 7 + 4	27' 1/2"
28	8 + 8 + 8 + 4	28' 1/2"
29	8 + 8 + 8 + 5	29' 1/2"
30	8 + 8 + 8 + 6	30' 1/2"
31	8 + 8 + 8 + 7	31' 1/2"
32	8 + 8 + 8 + 8	32' 1/2"
33	8 + 8 + 8 + 5 + 4	33' 1/2"
34	8 + 8 + 8 + 6 + 4	34' 1/2"
35	8 + 8 + 8 + 7 + 4	35' 1/2"
36	8 + 8 + 8 + 8 + 4	36' 1/2"
37	8 + 8 + 8 + 8 + 5	37' 1/2"
38	8 + 8 + 8 + 8 + 6	38' 1/2"
39	8 + 8 + 8 + 8 + 7	39' 1/2"
40	8 + 8 + 8 + 8 + 8	40' 1/2"
41	8 + 8 + 8 + 8 + 5 + 4	41' 1/2"
42	8 + 8 + 8 + 8 + 6 + 4	42' 1/2"
43	8 + 8 + 8 + 8 + 7 + 4	43' 1/2"
44	8 + 8 + 8 + 8 + 8 + 4	44' 1/2"
45	8 + 8 + 8 + 8 + 8 + 5	45' 1/2"
46	8 + 8 + 8 + 8 + 8 + 6	46' 1/2"
47	8 + 8 + 8 + 8 + 8 + 7	47' 1/2"
48	8 + 8 + 8 + 8 + 8 + 8	48' 1/2"

Microstructure EdgeTech Optics (MEO)™


MEO™ Optics can be specified in direct and indirect orientation. Our innovative MEO™ design utilizes high efficiency Microstructure Lenses and Light Guide Plates for high optical extraction and precise light management. MEO™ delivers exceptional light quality with seamless illumination and uniformity with no pixelation, hot spots or lens breaks up to 500' (MEODF, MEOGC, MEORF, MEOWW, MEOCW) or 250' (MEOBW).

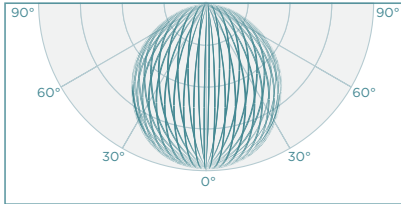


MEODF
LAMBERTIAN

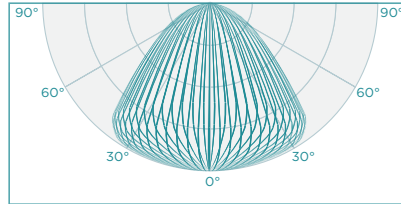


MEOGC
GLARE CONTROL

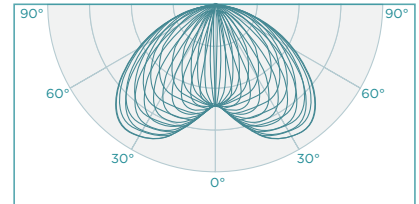


MEOBW
BATWING

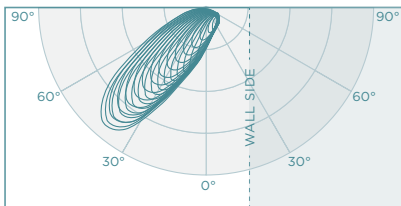

MEORF
ROOM FILL

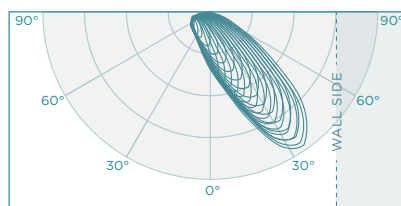

MEOWW
WALL WASH

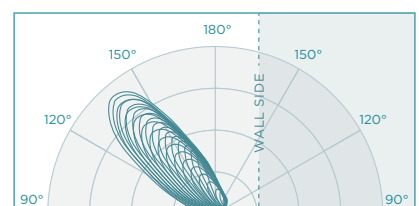


MEOCW
CEILING WASH


Precision Refractive Optics (PRO)

Precision Refractive Optics (PRO) are designed to produce precise optic control for diverse design applications. PRO Optics are only available in indirect orientation. PRO utilizes the latest in extruded lens technology that mount directly to the LED board channel to give optimum control.


Please Note: The PRO optics are not a diffused light source. LED pixelation will be seen with this optic choice. If you want a completely diffused light source with no pixelation or hot spots, see our Microstructure EdgeTech Optics (MEO)™ options.

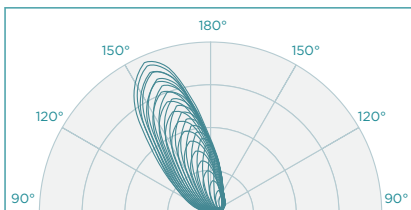

PROAY
ASYMMETRIC

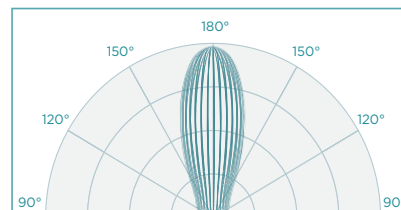

PRONR
NARROW

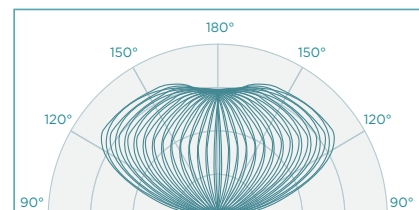

PROWD
WIDE




Thoughtful Engineering...

Thoughtful engineering is at the core of all of our fixture designs. All of our products are thoughtfully engineered and include innovative features that create a sophisticated fixture that is also contractor friendly and easy to install and service.


PUSH AND EJECT SYSTEM

Innovative "Push and Eject" System allows for toolless removal and installation of the Light Guide Plate. This thoughtful engineering creates easy access into the housing for simple installation and serviceability.

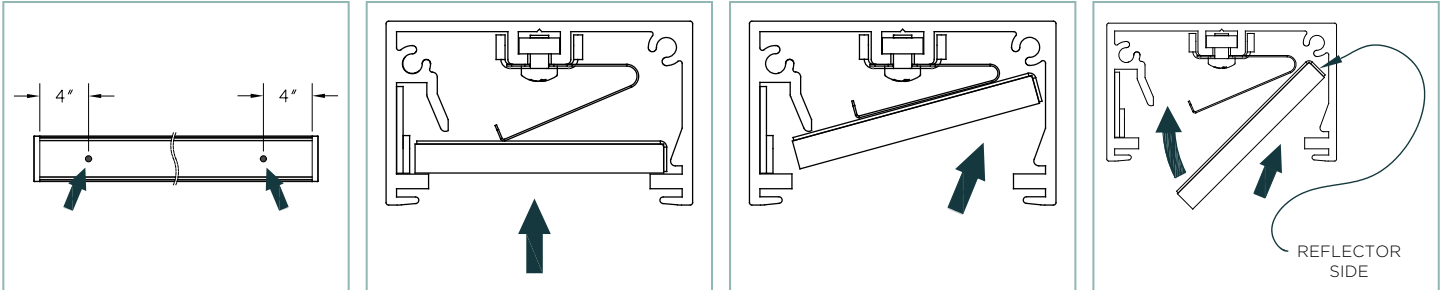


TOOLLESS LATCH SYSTEM

Our Toolless Latch System is designed to securely connect the extrusions of the continuous runs without the use of any tools, screws or external parts. Our innovative design allows the contractor to perfectly align the extrusion with the built-in alignment pins and cinch up the extrusion with the Toolless Latch System for a tight fit. The Toolless Latch System eliminates gaps and ensures perfect alignment.

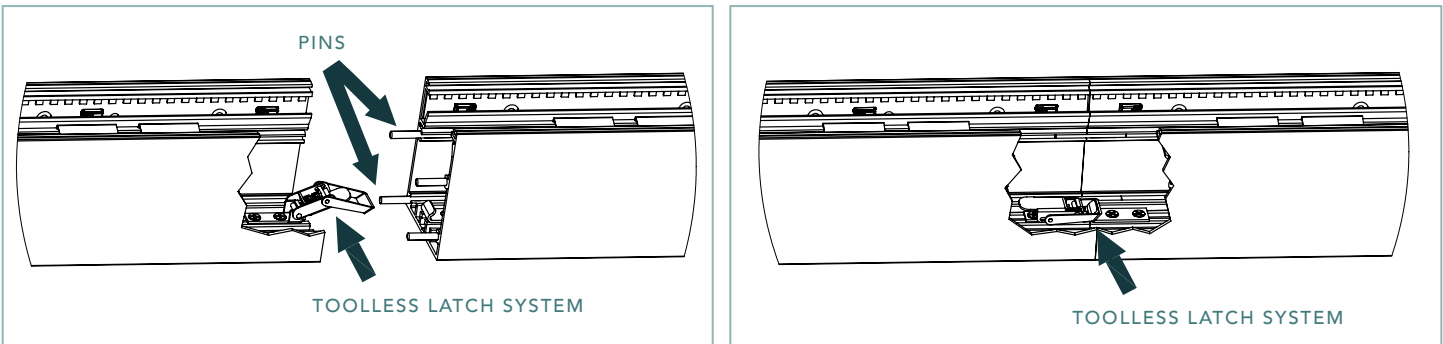

QUICK-CLICK 5-WIRE SYSTEM

Our Quick-Click 5-Wire System connects the continuous run through wiring with a simple push and click connection. The Quick-Click System is contractor friendly and decreases installation time and cost and ensures proper wiring.

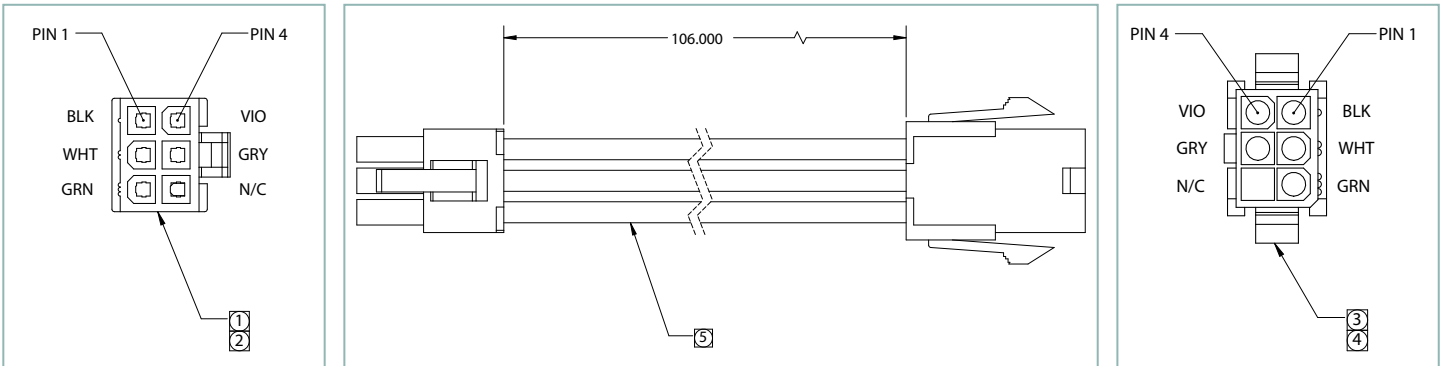


Decorative Driver

SINGLE DRIVER BOX

For driver input watts see SLO Configurator of Specified Fixture for input (aka "consumed") wattage


- Houses 1 remote LED Driver
- DL2 driver option up to 45 input watts
- D, DN, DD1 driver options up to 90 input watts
- DL5, DL1, DE and DDE driver options up to 80 input watts
- Available in SA Silver Anodized, WP Matte White, BP Matte Black and CC Custom Color finishes.
- Remote Driver distance cannot exceed 32' for D, DN, and DD1 driver options, 10' for DL5, DL1 and DL2 driver options and 46' for DE and DDE driver options.
- Compatible for single circuit Direct/Indirect fixture only if Uplight and Downlight Outputs specifications are identical and total luminaire wattage does not exceed values above.
- Suspended fixtures have AWM feeds factory prewired, 6" longer than aircraft cable specification and remote driver Surface Mount fixtures have 10' AWM leads out of fixture.

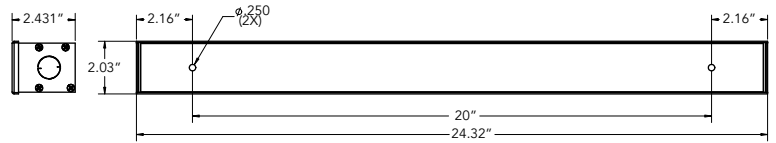

DUAL DRIVER BOX

For driver input watts see SLO Configurator of Specified Fixture for input (aka "consumed") wattage

- Houses 2 remote LED Drivers or 1 LED Driver and one EM Battery Pack. Can also house 1 LED Driver and GTD or other UL Listed linear form factor devices. Consult factory for more information.
- EM test switch installed on side of driver box for EM versions.
- Available in SA Silver Anodized, WP Matte White, BP Matte Black and CC Custom Color finishes.
- D, DN, DD1 driver options up to 180 input watts. Each of the 2 drivers cannot exceed 90 input watts individually
- DL5, DL1, DE and DDE driver options up to 160 input watts. Each of the 2 drivers cannot exceed 80 input watts individually.
- DL2 driver option up to 90 input watts. Each of the 2 drivers cannot exceed 45 input watts individually.
- Remote Driver distance cannot exceed 32' for D, DN, and DD1 driver options, 10' for DL5, DL1 and DL2 driver options and 46' for DE and DDE driver options or 1/2 these listed dimensions if the driver is paired with EM Battery Pack.
- Dual Driver box needed for Direct/Indirect fixtures with different light levels selected for Uplight and Downlight sides, certain higher wattage specifications or 2C 2 Circuit specifications with independent control for Uplight and Downlight Outputs.

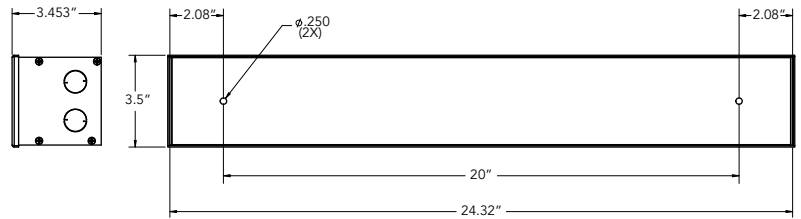


Remote Driver

SINGLE DRIVER BOX

For driver input watts see SLO Configurator of Specified Fixture for input (aka "consumed") wattage

- Houses 1 remote LED Driver
- Finish is raw galvanized steel
- D, DN, DD1 driver options up to 90 input watts
- DL5, DL1, DE and DDE driver options up to 80 input watts
- DL2 driver option up to 45 input watts.
- Remote Driver distance cannot exceed 32' for D, DN, and DD1 driver options, 10' for DL5, DL1 and DL2 driver options and 46' for DE and DDE driver options.
- Compatible for single circuit Direct/Indirect fixture only if Uplight and Downlight Outputs specifications are identical and total luminaire wattage does not exceed values above.
- Suspended fixtures have AWM feeds factory prewired, 6" longer than aircraft cable specification and remote driver Surface Mount fixtures have 10' AWM leads out of fixture.



DUAL DRIVER BOX

For driver input watts see SLO Configurator of Specified Fixture for input (aka "consumed") wattage

- Finish is raw galvanized steel
- EM test switch installed on lid of driver box for EM versions.
- Houses 2 remote LED Drivers or 1 LED Driver and one EM Battery Pack. Can also house 1 LED Driver and GTD or other UL Listed linear form factor devices. Consult factory for more information.
- D, DN, DD1 driver options up to 180 input watts. Each of the 2 drivers cannot exceed 90 input watts individually
- DL2 driver option up to 90 input watts. Each of the 2 drivers cannot exceed 45 individually.
- DL5, DL1, DE and DDE driver options up to 160 input watts. Each of the 2 drivers cannot exceed 80 input watts individually.
- Remote Driver distance cannot exceed 32' for D, DN, and DD1 driver options, 10' for DL5, DL1 and DL2 driver options and 46' for DE and DDE driver options or 1/2 these listed dimensions if the driver is paired with EM Battery Pack.
- Dual Driver box needed for Direct/Indirect fixtures with different light levels selected for Uplight and Downlight sides, certain higher wattage specifications or 2C 2 Circuit specifications with independent control for Uplight and Downlight Outputs.

