

PRODUCT TECHNICAL DATA SHEET

F118-LED SERIES

SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES

	length	width	height	weight	tenon size	EPA
Large	17.5"	17.5"	30"	25 lbs	3"(W) x 4"(L)	2.30 ft ²
Small	-	-	-	-	-	-


PHOTOMETRICS

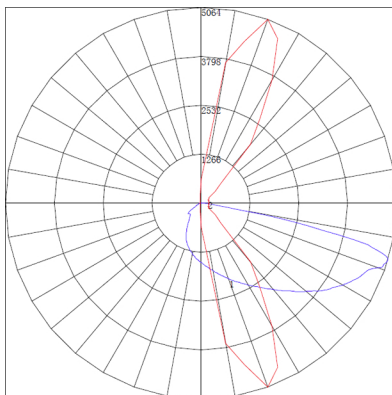

SAMPLE ILLUSTRATION
IES type III, medium

◀ polar graph

ISO footcandle ▶

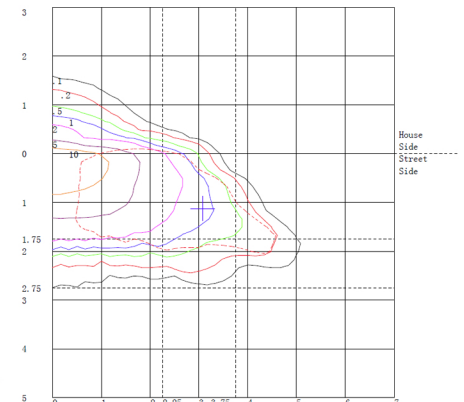

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F118-L	A	CAC	LED	3000K	120V~277V	IES TYPE	DIM	FA	STANDARD RAL
	B	CLEAR ACRYLIC	35W	4000K		II (2)	DIMMING CONTROL	FB	6005 GREEN
	C		50W	5000K	STEP DOWN	III (3)	FUS	FC	7012 GREY
	D	FAC	55W	6000K	TRANSFORMER	IV (4)	INTERNAL FUSING	FD	8019 BRONZE
	E	FROSTED ACRYLIC	70W		347V	V (5)		FE	9011 BLACK
	F		90W	± 10% VARIANCE	480V		PCB	FF	9016 WHITE
	G	FPC	120W				BUTTON TYPE PHOTOCELL	FG	*TEXTURE AVAILABLE
	H	FROSTED POLYCARBONATE					PEC	FH	CUSTOM RAL
	I		CUSTOM				TWIST LOCK PHOTOCELL	FI	
	J						HSS	FJ	
	K						HOUSE SIDE SHIELD	NONE	
	L						TWL		
	Q						TWIST LOCK SYSTEM		
	R						WIRELESS CONTROL		
	T						AVAILABLE		
	U								

Product ordering sample

F118 - L - A - CAC - 35LED - 3000K - 120~277V - TYPE II - DIM - FA - RAL9011 BLACK