

LumiStick™ Mini Frost

LED Light Bar

CUSTOMIZABLE

- // Custom made to any length
- // Modular system

QUICK INSTALLATION

- // Easy installation

ENERGY EFFICIENT

- // High luminance with very low power consumption

WORRY FREE

- // Long maintenance free life
- // Shock and vibration proof

WARRANTY

- // Advanced 3-year warranty



MINI LINEAR LIGHTING SOLUTION

Introducing our newest member of the LumiStick™ family. The LumiStick™ Mini Frost comes complete with an integrated acrylic diffuser to gently blend the point source LED's. LumiStick™ Mini Frost is a modular system that allows for full customization in length and color temperature. Our simple end to end plug in connectors make installation a "snap" and our flexible connectors allow for simple corners as well as more complex design.


Slim Profile

The LumiStick™ Mini design allows for easy integration into commercial & retail displays. It's simple design is also perfect for hidden recessed applications.



High Quality LEDs

LumiStick™ Mini utilizes the same high quality LED technology as LumiSheet™, therefore color temperatures can be identically matched when used in conjunction with LumiSheet™.

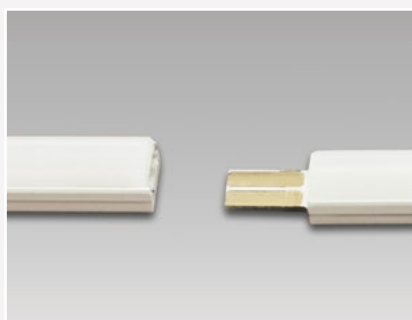

Custom Lengths

Standard lengths are available but one of the key features of the LumiStick™ Mini is the ability to create custom lengths at no additional charge.




SPECIFICATIONS


Electrical			
Input Voltage	12 Volt DC - Constant Voltage		
Power Consumption	2.3 Watts/ft		
Wire Size	20 AWG 2 Wire		
Wiring	Each light bar should be connected to a power adaptor either directly or with a spider connector provided the total power consumption of all light bars connected is less than 80% rated wattage of the power adaptor.		
Expected Lifespan	50,000 ~ 70,000 hrs		
Physical			
Lumen Ouput	138 lm/ft		
Color Temperature	White Warm approx. 3000K	Neutral White approx. 4100K	Pure/Cool White approx. 5300K
Mounting	Clips Supplied		
Operating Temperature	-30 °C (-22 °F) ~ +40 °C (+104 °F)		
Environment	Dry location only (Standard)		
Minimum Size	7.87" (200mm)		
Maximum Size	96" (2438mm)		
Power & Controls			
Please contact Evo-Lite for optimal power & control solutions to fit your requirements			

Color Temperature:  Warm White 3000K  Neutral White 4100K  Pure / Cool White 5300K

3D DRAWING

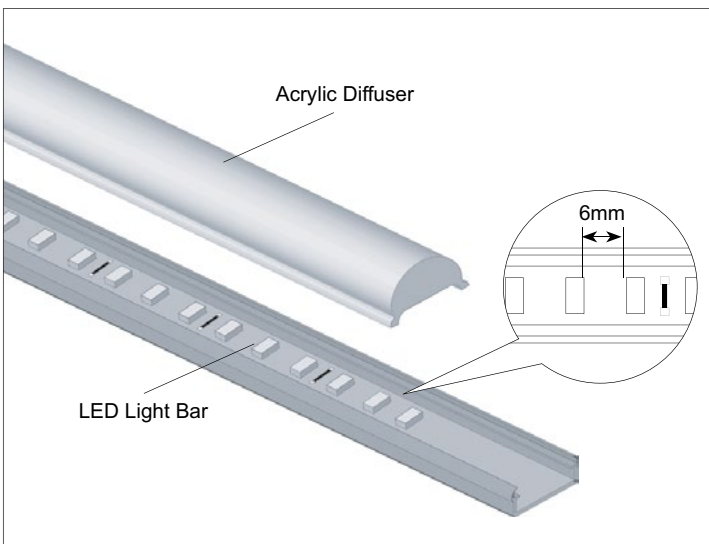

PROFILE

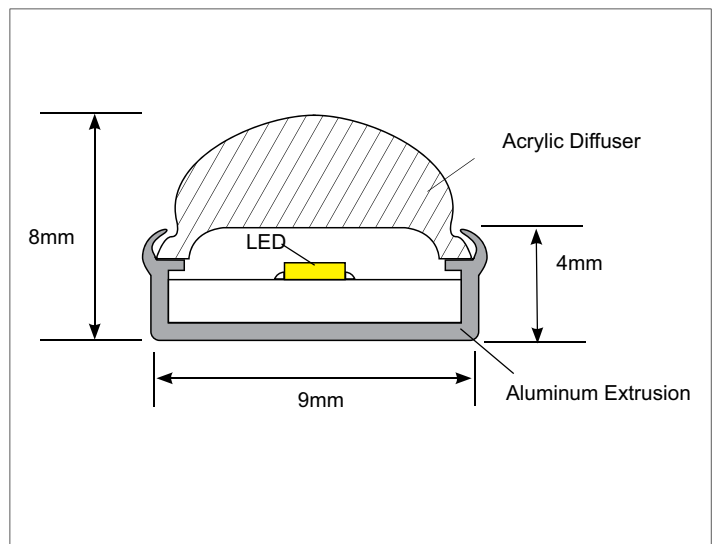



EVO-LITE, LLC

1393 S. Santa Fe Dr. Denver, CO 80223

MAIN PHONE: 303-996-2980

TOLL FREE: 1-888-887-2980

E-MAIL: info@Evo-Lite.com

URL: www.Evo-Lite.com

TERMS & CONDITIONS

Be sure to familiarize yourself with Evo-Lite's [Terms & Conditions](#).

By ordering from Evo-Lite, the purchaser agrees to all [Terms & Conditions](#).

PATENTS

LumiSheet™ PATENTS

USA: 7473022
CANADA: 2,626,448
JAPAN: 4427528
CHINA: ZL 200610085027.0
TAIWAN: 312899
SINGAPORE: 141901
SOUTH AFRICA: 2008/03676
EUROPEAN UNION:
1,780,584
(Germany, UK, France, Italy,
Spain, The Netherlands,
Belgium, Sweden, Austria,
Poland, Denmark, Greece,
Ireland, Finland, Portugal, Czech
Republic, Hungary, Romania,
Slovakia, Bulgaria, Switzerland,
Luxembourg, Slovenia, Turkey,

V-CUTTER FOR AN LCD LIGHT GUIDE PANEL

USA: 6619175
JAPAN: 3500466
TAIWAN: 155175

A LIGHT GUIDE PANEL WITH SALANT LIGHT GUIDING PARTS

USA: US 7,018,087 B2

PIN KIT FOR V-CUTTER

KOREA: 10-0552589, 10-
0557738, 10-0557741,
0540055, 0540053, 10-
0772921, 10-0716543,
10-0565890, 10-0753963,
10-0643604,
10-0736656, 10-0748074,
10-0748073, 10-0762741,
USA: 6792842
JAPAN: 3463060
EU: 1335817
CHINA: ZL 01818623.8
TAIWAN: 163820

Copyright © 2014 All rights reserved.
Specifications are subject to change without notice.